

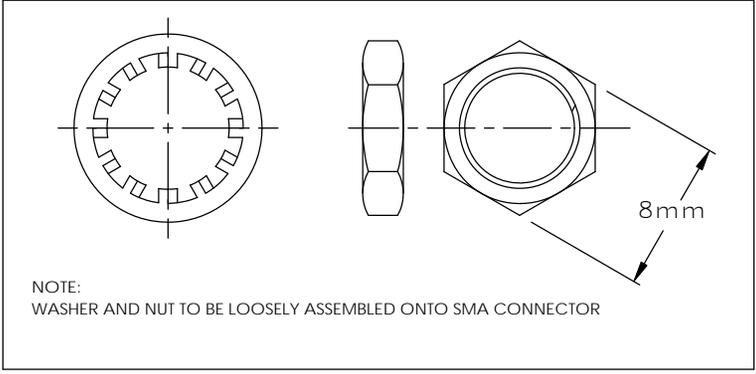


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	2/24/10	B.Puchaski

No#	DESCRIPTION	Qty	MATERIAL
1	U.FL Connector	1	--
2	Ø 1.13 mm Cable	1	--
3	Heat Tubing	1	--
4	SMA Female Bulkhead	1	Gold Plated Brass

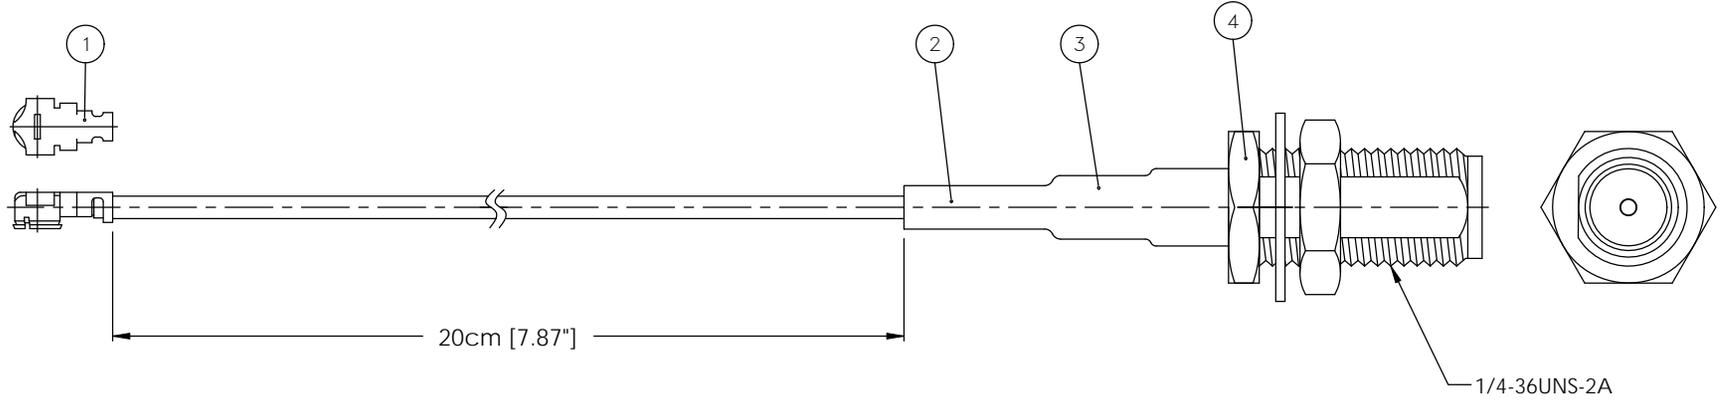

RECOMENDED HOLE DIMENSION FOR SMA CONNECTOR

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS  DIMENSIONAL TOLERANCES: .X = ±0.2 .XX = ±0.1 .XXX = ±0.05  ANGULAR TOLERANCES: ALL = ± 5°  PROJECTION	APPROVALS B.Puchaski	DATE 02/24/10		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CHECKED BY M.Audas	DATE 02/24/10		CATEGORY COAXIAL	
	APPROVED BY M.Audas	DATE 02/24/10	PRODUCT DESCRIPTION U.FL to SMA Female Bulkhead 20 cm - 1.13 Series Cable		
	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. CA-UFLSBQC20	REV. <b>A</b>
SCALE: NONE		CAD FILE: CA-UFLSBQC20.SLDDRW		SHEET 1 OF 1	