


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/2/12	D.GRIFFIN
B	ECN 6451: UPDATED NOTES & WIRING MAP. CHANGED EXPOSED CONN. DIM.	10/10/12	D. DESJARDIN

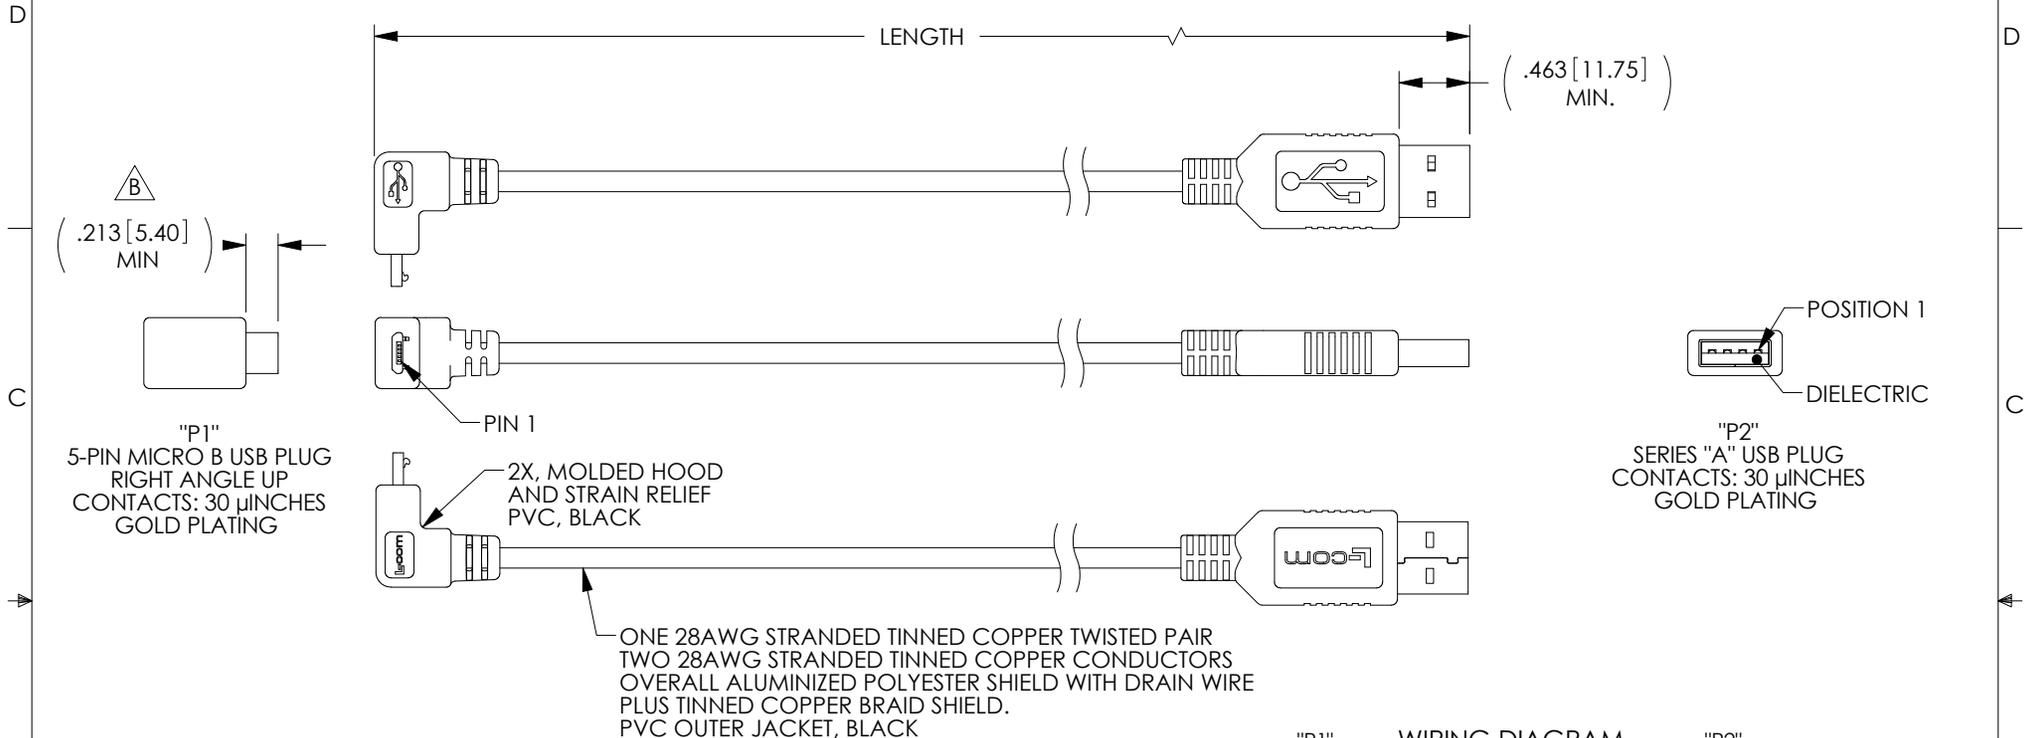


"P1"
5-PIN MICRO B USB PLUG
RIGHT ANGLE UP
CONTACTS: 30 μINCHES
GOLD PLATING

POSITION 1
DIELECTRIC
"P2"
SERIES "A" USB PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 28AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAID SHIELD.
PVC OUTER JACKET, BLACK

MODEL NUMBER	LENGTH METERS [FEET]
CAA-90UMICB-03M	.3 [.98]
CAA-90UMICB-05M	.5 [1.64]
CAA-90UMICB-075M	.75 [2.46]
CAA-90UMICB-1M	1.0 [3.28]
CAA-90UMICB-2M	2.0 [6.56]
CAA-90UMICB-3M	3.0 [9.84]
CAA-90UMICB-5M	5.0 [16.41]

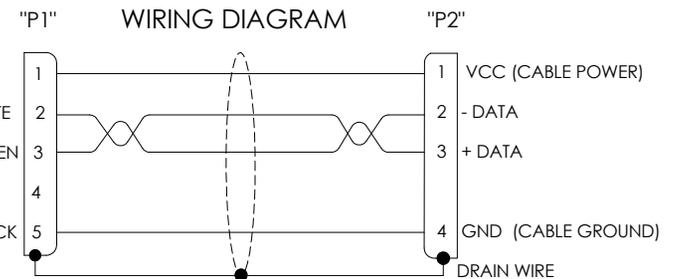

△

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. FRISIELLO	5/20/11		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. CASTRO	5/20/11	PRODUCT DESCRIPTION	
PROJECTION 	APPROVED BY S. SMITH	5/20/11	CA USB STR A-M/90UP MICB	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
	COLOR VARIATIONS MAY OCCUR		DWG. NO. CAA-90UMICB	REV. B
			SCALE: NONE	CAD FILE: CAA-90UMICB.SLDDRW
				SHEET 1 OF 1