


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/30/14	D.GRIFFIN

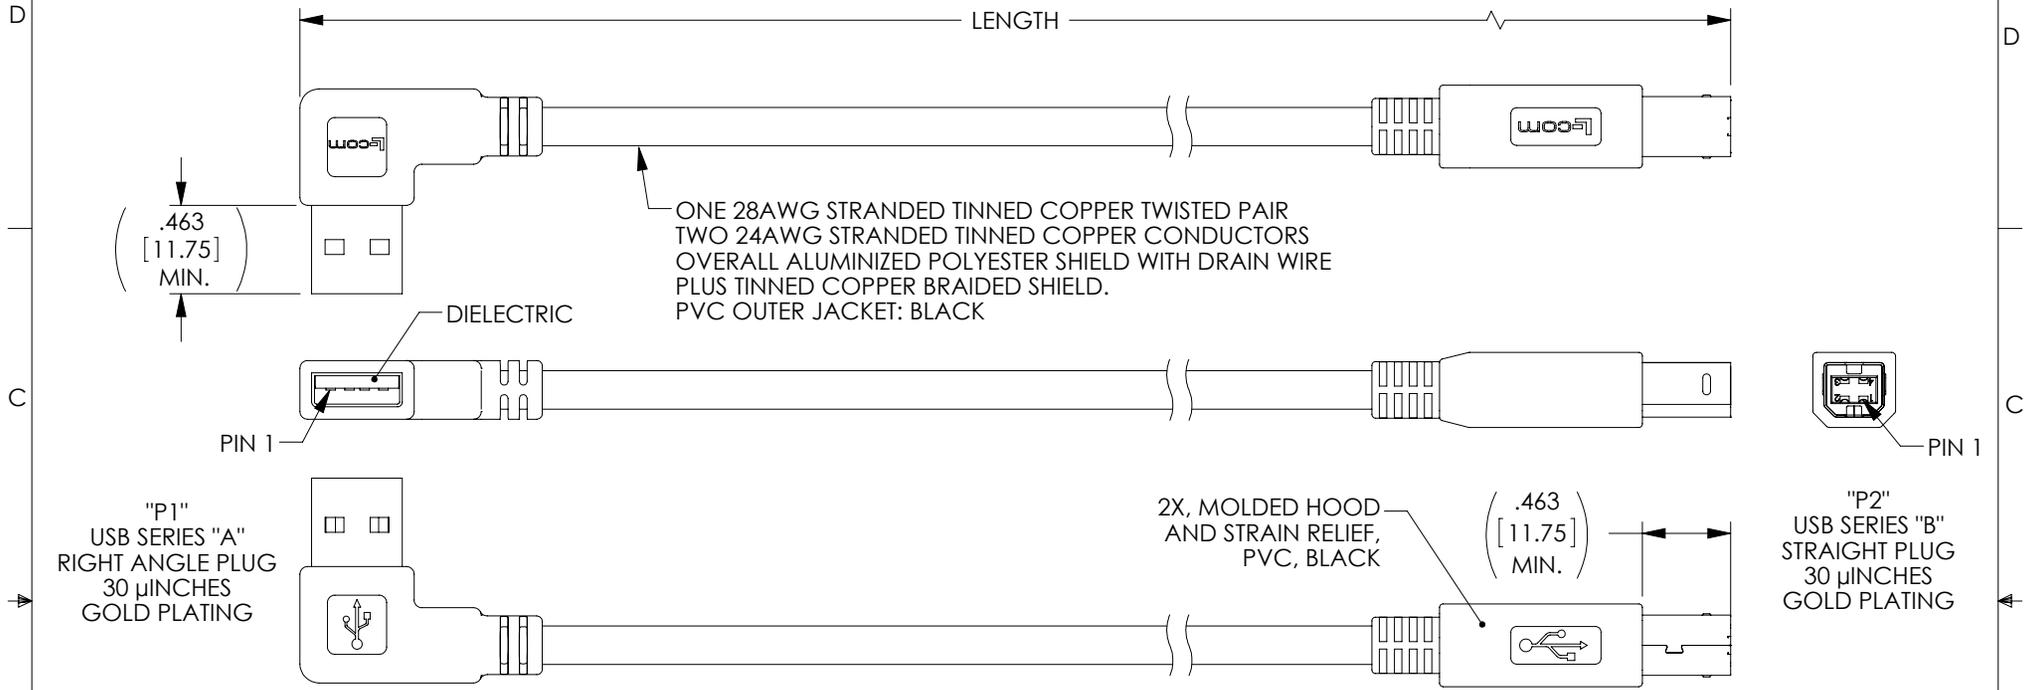

"P1"  
USB SERIES "A"  
RIGHT ANGLE PLUG  
30 μINCHES  
GOLD PLATING

"P2"  
USB SERIES "B"  
STRAIGHT PLUG  
30 μINCHES  
GOLD PLATING

"P1" WIRING DIAGRAM "P2"

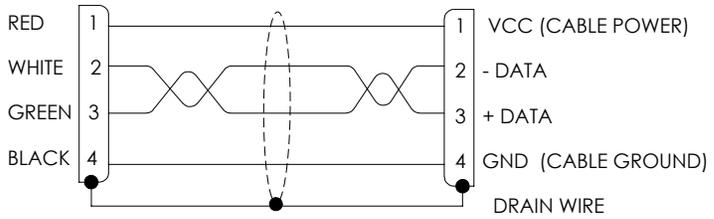

PART NUMBER	LENGTH	
	METERS	FEET
CABLK90RA-B-03M	0.3	.98
CABLK90RA-B-05M	0.5	1.64
CABLK90RA-B-1M	1.0	3.28
CABLK90RA-B-2M	2.0	6.56
CABLK90RA-B-3M	3.0	9.84
CABLK90RA-B-5M	5.0	16.41

- NOTES:**
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
  2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
  3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS DRAWN BY D.FRISELLO	DATE 1/27/14		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY R.SCOTT	1/27/14		CATEGORY USB
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.3]	APPROVED BY S. SMITH	1/27/14	PRODUCT DESCRIPTION CA USB 90RA A/STR B BLK	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. CABLK90RA-B	REV. <b>A</b>
			SCALE: NONE	CAD FILE: CABLK90RA-B.SLDDRW
			SHEET 1 OF 1	