
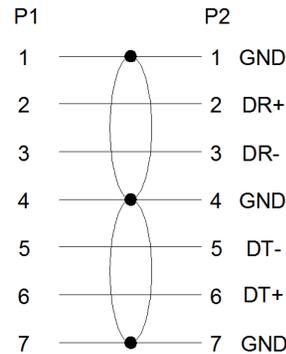


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/3/03	DFP
B	ECN 3206: UPDATE DWG FORMAT	2/29/08	D.GRIFFIN
C	ECN5761: UL STYLE WAS 2725. UPDATED PACKAGING NOTE & DWG FORMAT. UPDATED PICTORALLY.	10/11/11	DFP

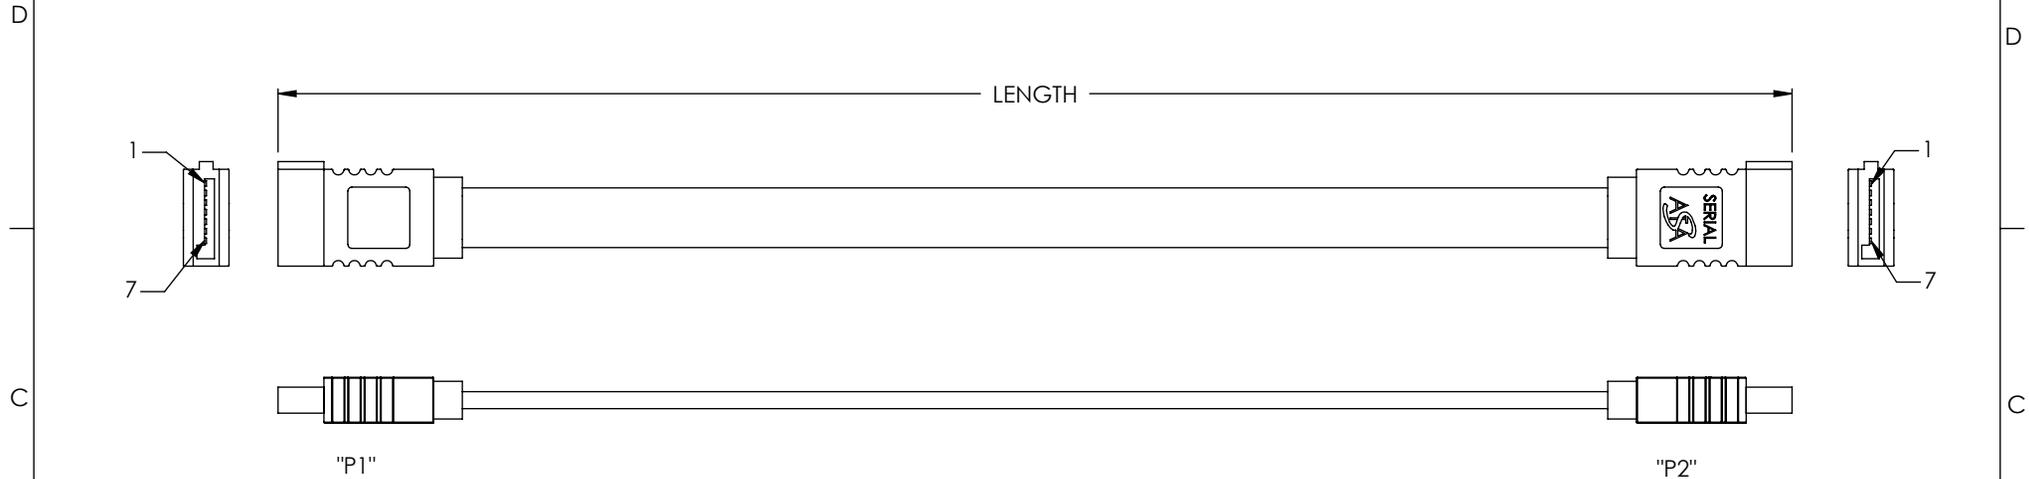

WIRING DIAGRAM

TABLE		
MODEL	METERS	FEET
CASATA-05M	0.5	1.64
CASATA-1M	1	3.28

NOTES:

CABLE:

FLAT CABLE, UL21149
 TWO 26 AWG PAIRS SHIELDED AND DRAIN WIRE
 INSULATOR MATERIAL: FM-PE
 COLOR: RED
 IMPEDANCE: 100 Ω ± 10

CONNECTOR:

INSULATOR: UL94V-0 RATED
 COLOR: BLACK
 CONTACTS: PHOSPHOR BRONZE
 PLATING: 15 μINCHES GOLD
 OVERMOLD: PVC
 COLOR: BLACK

PACKAGING:

INDIVIDUALLY PACKAGE IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

NOTE:

- CABLE IS WIRED STRAIGHT THROUGH
- BOTH SHIELDS AND ALL DRAIN WIRES TIED TOGETHER.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	04/02/2003	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY T. CLARK	04/03/2003	CATEGORY HETEROGENOUS
	APPROVED BY C. McCORMICK	04/03/2003	PRODUCT DESCRIPTION SERIAL ATA CABLE ASSEMBLY
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. CASATA REV. C SCALE: NONE CAD FILE: CASATA.SLDDRW SHEET 1 OF 1