
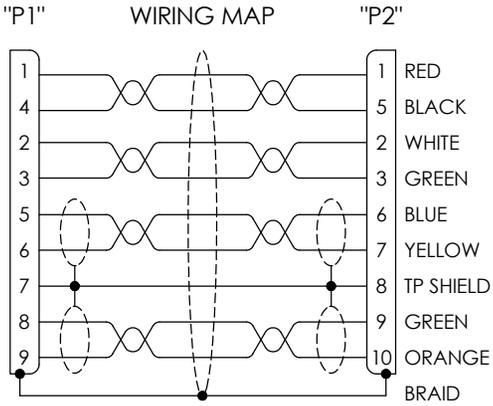


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|------------|------------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 01/25/2021 | GUTTADAURO |
| | | | |
| | | | |

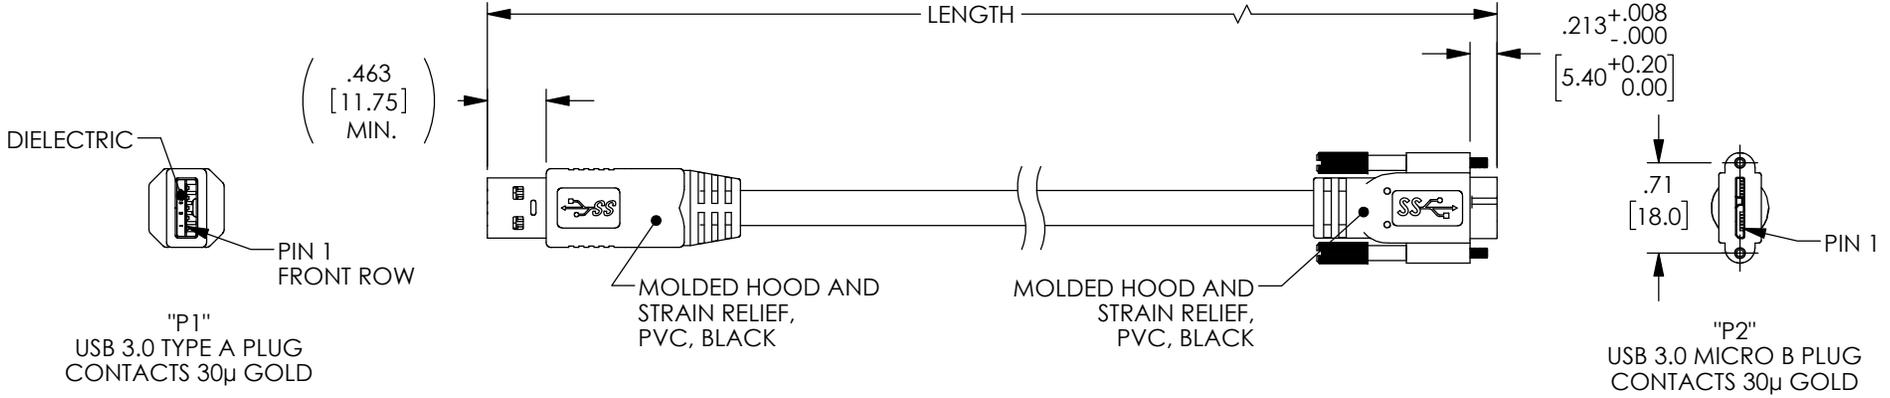


UL STYLE 20276, USB3.0 HIGH FLEX CABLE, (2) TWISTED PAIR, 28AWG WITH ALUM/POLY, DRAIN WIRE AND SPIRAL SHIELD, (1) UNSHIELDED TWISTED PAIR, 26AWG, (1) UNSHIELDED TWISTED PAIR, 22AWG, OVERALL ALUM/POLY AND BRAIDED SHIELD, JACKET: PVC, BLACK (NOM DIA. .276" [7.0]; FLAME RATING: UL VW-1; MIN. FIXED BEND RADIUS: 5X O.D.; MIN. MOVING BEND RADIUS: 10X O.D.)

| PART NUMBER | LENGTH METERS [FEET] |
|---------------------|----------------------|
| CAU3HFAMBV-BLK-05M | 0.5 [1.64] |
| CAU3HFAMBV-BLK-1M | 1.0 [3.28] |
| CAU3HFAMBV-BLK-105M | 1.5 [4.92] |
| CAU3HFAMBV-BLK-2M | 2.0 [6.56] |
| CAU3HFAMBV-BLK-3M | 3.0 [9.84] |

NOTES:

1. CABLE TYPE-U DRAG CHAIN TESTING: 5 MILLION CYCLES MIN. (75mm BEND RADIUS)
2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

| | | | |
|--|---------------------------|---------------------------------|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13] | APPROVALS | DATE |  50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 |
| | DRAWN BY SLI | 12/07/2020 | |
| THIRD-ANGLE PROJECTION  | CHECKED BY GUTTADAURO | 12/07/2020 | CATEGORY USB |
| | APPROVED BY GUTTADAURO | 12/07/2020 | PRODUCT DESCRIPTION CA, USB3.0 A/MICB HIGH FLEX DRAG CHAIN W/HDW |
| COLOR VARIATIONS MAY OCCUR | SIZE A | CAGE CODE 43321 | DWG. NO. CAU3HFAMBV-BLK |
| SCALE: NONE | | CAD FILE: CAU3HFAMBV-BLK.SLDDRW | REV. A |