
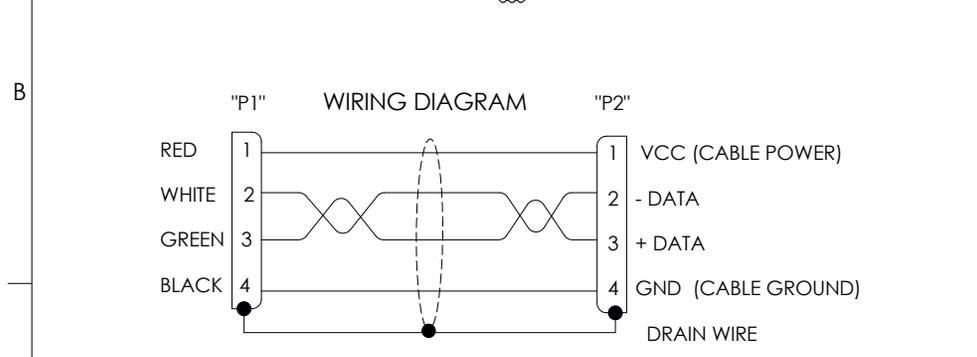


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6991: CHANGED SR TO PVC. UPD CONNECTOR PICTORALLY. ROHS NOTE	8/2/13	D. DESJARDIN

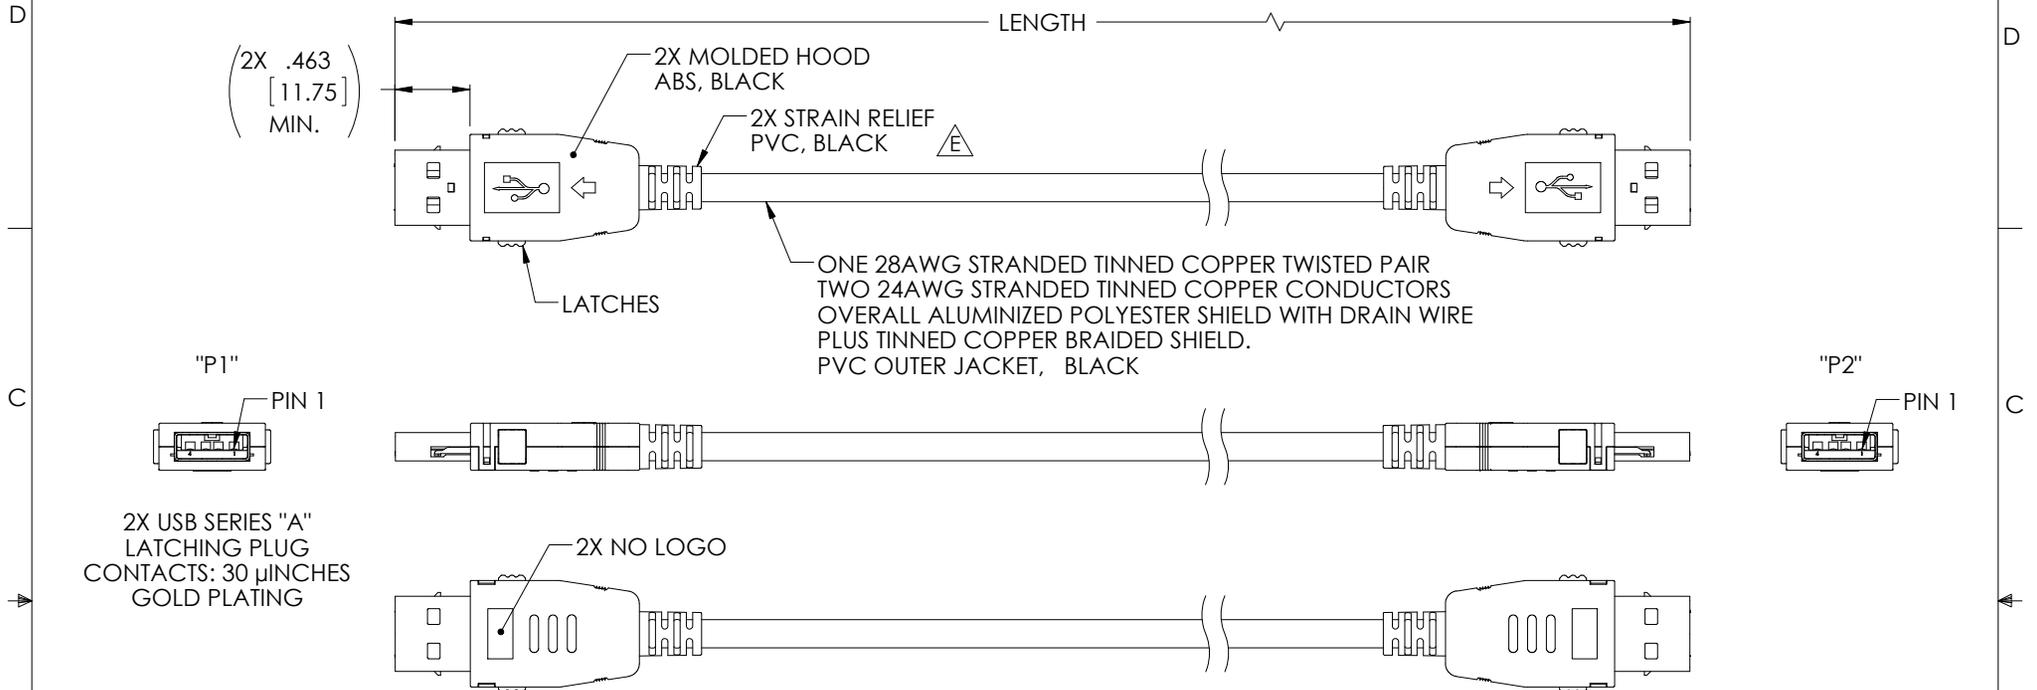

MODEL NUMBER	LENGTH METERS [FEET]
CAUALAL-03M	0.3 [.98]
CAUALAL-05M	0.5 [1.64]
CAUALAL-075M	0.75 [2.46]
CAUALAL-1M	1.0 [3.28]
CAUALAL-2M	2.0 [6.56]
CAUALAL-3M	3.0 [9.84]
CAUALAL-4M	4.0 [13.12]
CAUALAL-5M	5.0 [16.40]

- NOTES:**
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS DRAWN BY D.FRISIELLO	DATE 10/23/09	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845				
	CHECKED BY M.MARTINEZ	DATE 10/23/09		CATEGORY USB			
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	APPROVED BY S.SMITH	DATE 10/23/09	PRODUCT DESCRIPTION CBL,USB A/A LATCHING BLK				
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	<table border="1"> <tr> <td>SIZE A</td> <td>FSCM NO. 43321</td> <td>DWG. NO. CAUALAL</td> <td>REV. E</td> </tr> </table>	SIZE A	FSCM NO. 43321	DWG. NO. CAUALAL	REV. E
SIZE A	FSCM NO. 43321	DWG. NO. CAUALAL	REV. E				
SCALE: NONE		CAD FILE: CAUALAL.SLDDRW					
			SHEET 1 OF 1				