


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/28/13	D.GRIFFIN

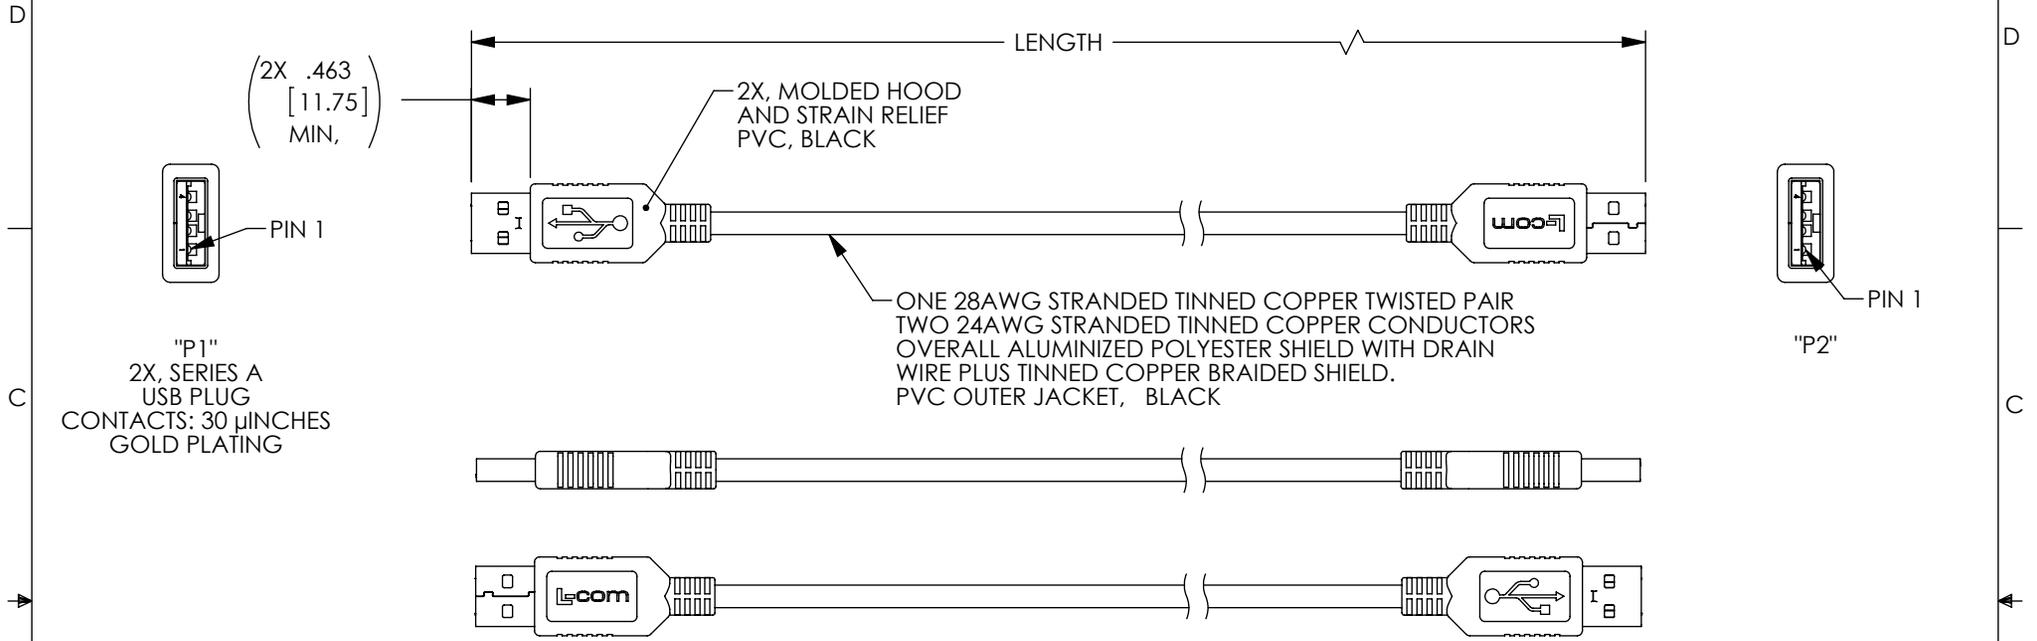


"P1"
2X, SERIES A
USB PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

"P2"

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 24AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN
WIRE PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, BLACK

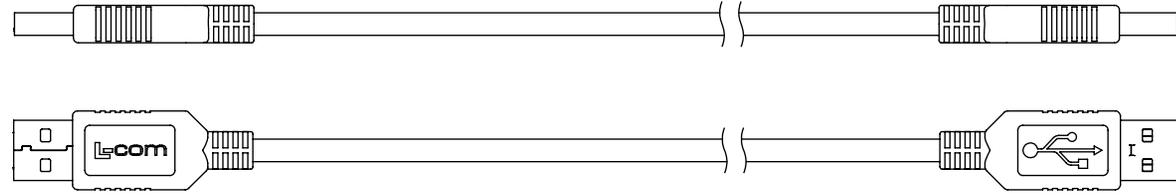

"P1" WIRING DIAGRAM "P2"

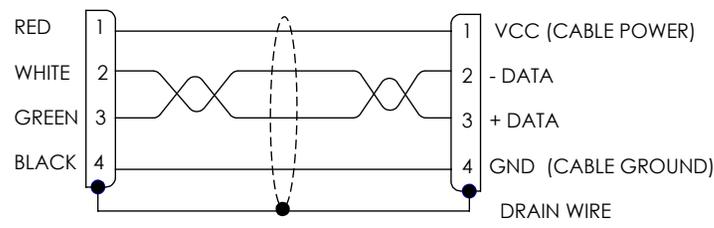

PART NUMBER	LENGTH	
	METERS	FEET
CAUBLKAA-03M	0.3	[1.98]
CAUBLKAA-05M	0.5	[1.64]
CAUBLKAA-075M	0.75	[2.46]
CAUBLKAA-1M	1.0	[3.28]
CAUBLKAA-2M	2.0	[6.56]
CAUBLKAA-3M	3.0	[9.84]
CAUBLKAA-4M	4.0	[13.12]
CAUBLKAA-5M	5.0	[16.41]

- NOTES:**
1. CABLE ASSEMBLIES ARE CONSTRUCTED TO MEET USB 2.0 REQUIREMENTS.
 2. CABLE ASSEMBLIES SHALL HAVE 360° SHIELD TERMINATION.
 3. CONNECT DRAIN WIRE TO CONNECTOR SHELLS.
 4. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
 5. CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	10/28/13		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	CHECKED BY D.DESJARDIN	10/28/13	CATEGORY USB	
	APPROVED BY S.SMITH	10/28/13	PRODUCT DESCRIPTION CBL,USB A/A BLK	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. CAUBLKAA	REV. A
			SCALE: NONE	CAD FILE: CAUBLKAA.SLDRW
				SHEET 1 OF 1