
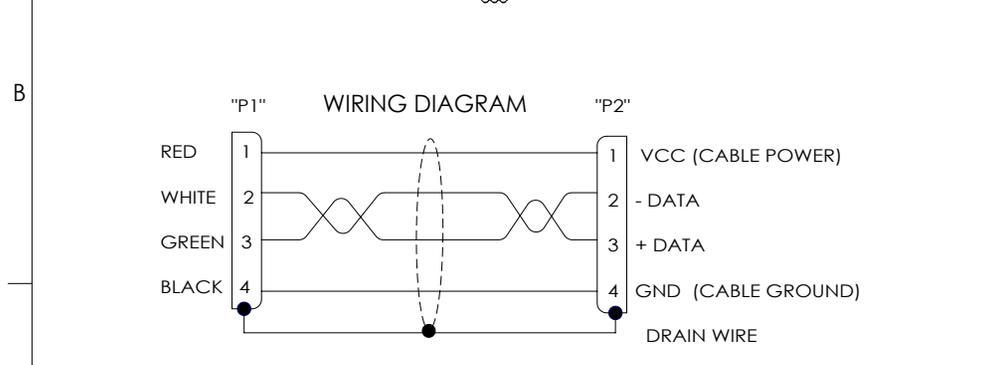


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6991: UPD CONNECTOR PICTORALLY. ROHS NOTE	8/2/13	D. DESJARDIN
F	ECN 7220: CHG'D TPU TO LSZH, ADDED ROHS	1/7/14	D.FRISIELLO
G	ECN 10804:UPT CABLE: ADD CABLE OD, FLAME RATING, TEMP. RANGE&LSZH IEC STANDARDS	11/23/2020	MMARTINEZ

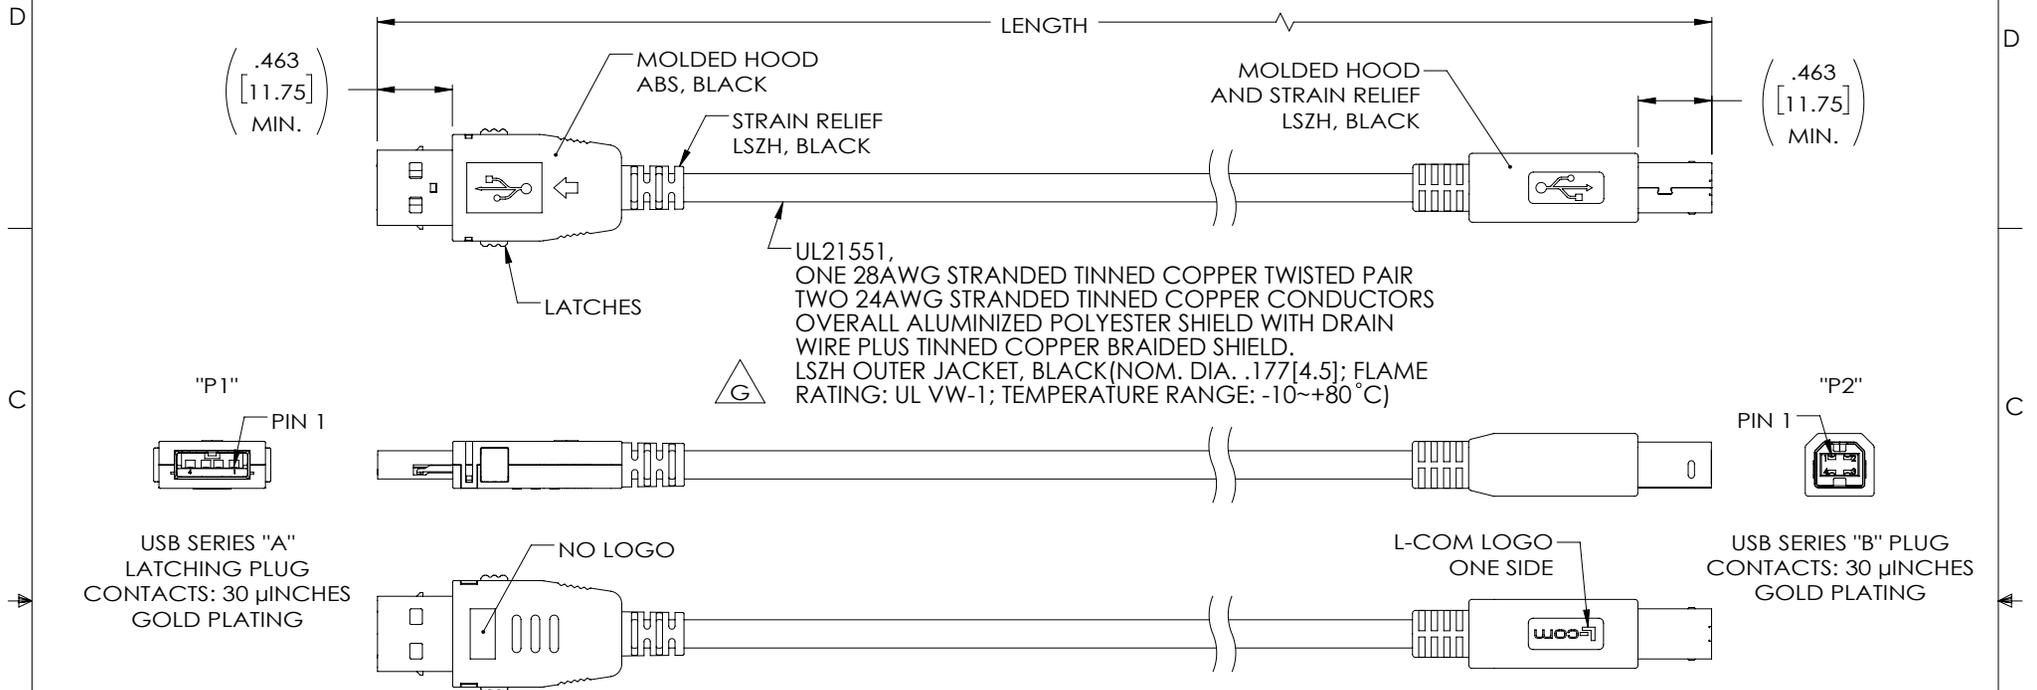


MODEL NUMBER	LENGTH METERS [FEET]
CAUZALB-03M	0.3 [.98]
CAUZALB-05M	0.5 [1.64]
CAUZALB-075M	0.75 [2.46]
CAUZALB-1M	1.0 [3.28]
CAUZALB-2M	2.0 [6.56]
CAUZALB-3M	3.0 [9.84]
CAUZALB-4M	4.0 [13.12]
CAUZALB-5M	5.0 [16.40]

**NOTES:**

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**LSZH CABLE CHARACTERISTICS:**  
 FLAME RATING: IEC 60332-1  
 CORROSIVE GAS: IEC 60754  
 SMOKE EMISSION: IEC 61034



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY D.FRISIELLO	10/23/09	
THIRD-ANGLE PROJECTION 	CHECKED BY M.MARTINEZ	10/23/09	PRODUCT DESCRIPTION <b>CA,USB A LATCH/STD B LSZH</b>
	APPROVED BY S.SMITH	10/23/09	SIZE <b>A</b>   CAGE CODE <b>43321</b>   DWG. NO. <b>CAUZALB</b>   REV. <b>G</b> SCALE: NONE   CAD FILE: CAUZALB.SLDDRW   SHEET 1 OF 1