


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/12/13	D.GRIFFIN

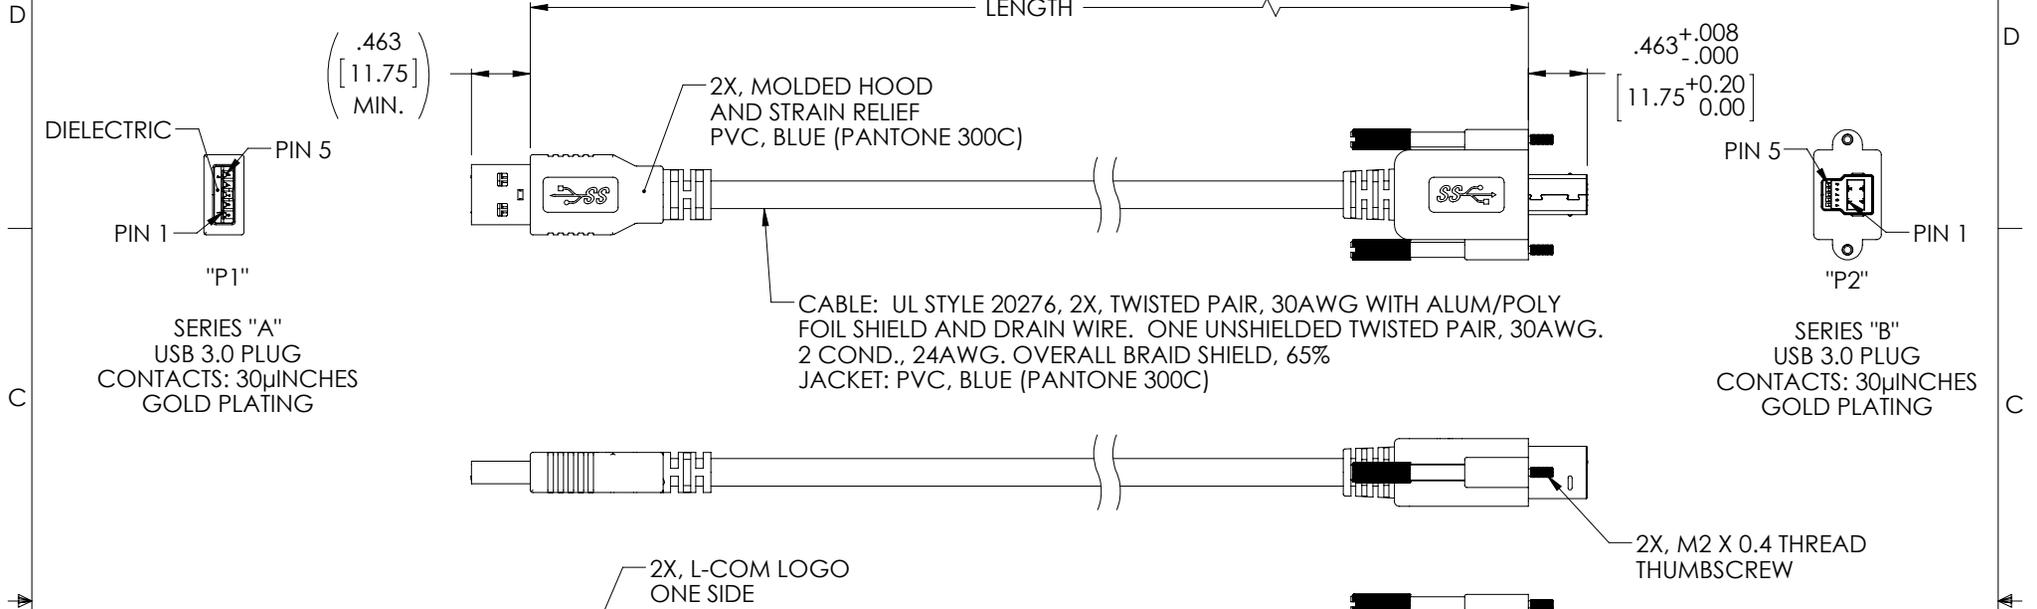

"P1"	WIRING MAP	"P2"
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	3
5	BLUE	4
6	YELLOW	5
7	DRAIN WIRE	6
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

MODEL NUMBER	LENGTH METERS [FEET]
CAVISU3AB-03M	0.3 [.98]
CAVISU3AB-05M	0.5 [1.64]
CAVISU3AB-1M	1.0 [3.28]
CAVISU3AB-2M	2.0 [6.56]
CAVISU3AB-3M	3.0 [9.84]
CAVISU3AB-5M	5.0 [16.41]

**NOTES:**

**MISCELLANEOUS:**  
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.  
 CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. DESJARDIN	5/21/13		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [1.27]	CHECKED BY D. FRISIELLO	8/7/13	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY S. SMITH	8/12/13	CA USB3.0 A/B W/HWWARE USB VISION 3.0	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. CAVISU3AB	REV. <b>A</b>
			SCALE: NONE	CAD FILE: CAVISU3AB.SLDDRW
				SHEET 1 OF 1