


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CN RELEASE	1/5/10	D.GRIFFIN



3 PIN MALE XLR CONNECTOR NICKEL PLATED CONTACTS

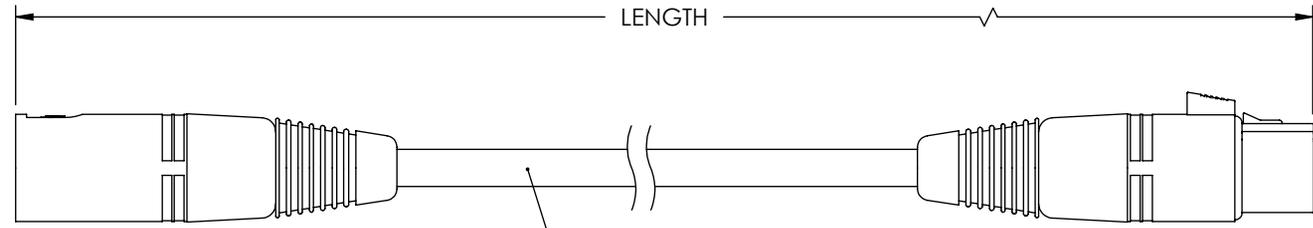

3 PIN FEMALE XLR CONNECTOR NICKEL PLATED CONTACTS

24AWG CABLE, SPIRAL SHIELD, OUTER JACKET: PVC, BLACK

WIRE MAP		
"P1"	"J1"	SIGNAL
1	1	SHIELD
2	2	+VE (HOT)
3	3	-VE (COLD)

PART NUMBER	LENGTH	
	FEET	METERS
CAXLR2XLR-1	1.0	.30
CAXLR2XLR-3	3.0	.91
CAXLR2XLR-6	6.0	1.83
CAXLR2XLR-10	10.0	3.05
CAXLR2XLR-15	15.0	4.57
CAXLR2XLR-20	20.0	6.10
CAXLR2XLR-25	25.0	7.62

RoHS Compliant ✓

- NOTES:**
- CABLE SHALL BE TESTED FOR CONTINUITY.
 - CABLE SHALL BE PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D. CASTRO	11/30/09				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. PARHAM	12/1/09	CATEGORY AUDIO			
	APPROVED BY P. MCNEIL	12/2/09	PRODUCT DESCRIPTION CA XLR-M/XLR-F AUDIO			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CAXLR2XLR	REV. A
			SCALE: NONE	CAD FILE: CAXLR2XLR.SLDDRW	SHEET 1 OF 1	