


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4101: CN RELEASE AND NEW FORMAT	7/7/09	D.FRISIELLO
F	ECN 4726: ADD PTFE DIELECTRIC TO BNC CONNECTOR	5/6/10	D.FRISIELLO

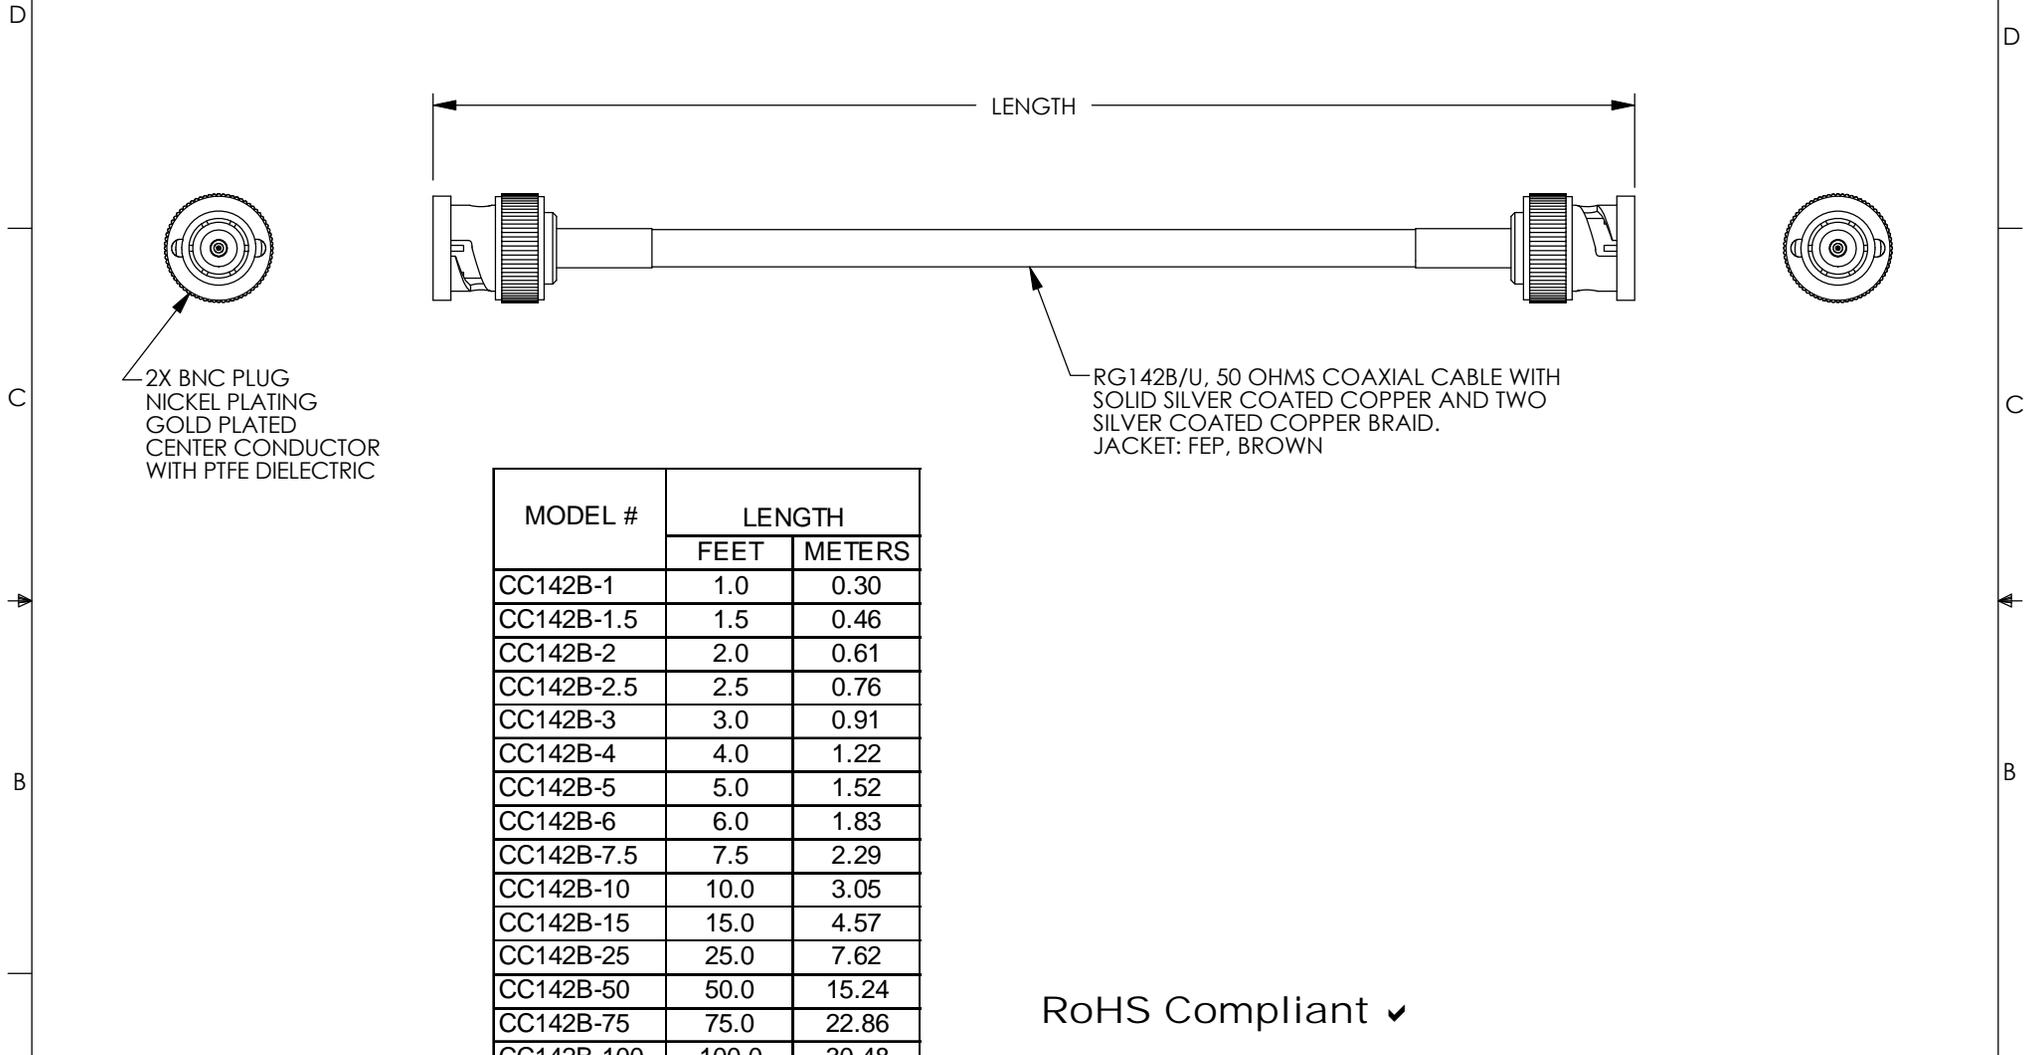

MODEL #	LENGTH	
	FEET	METERS
CC142B-1	1.0	0.30
CC142B-1.5	1.5	0.46
CC142B-2	2.0	0.61
CC142B-2.5	2.5	0.76
CC142B-3	3.0	0.91
CC142B-4	4.0	1.22
CC142B-5	5.0	1.52
CC142B-6	6.0	1.83
CC142B-7.5	7.5	2.29
CC142B-10	10.0	3.05
CC142B-15	15.0	4.57
CC142B-25	25.0	7.62
CC142B-50	50.0	15.24
CC142B-75	75.0	22.86
CC142B-100	100.0	30.48

RoHS Compliant ✓

- NOTES:
1. CABLE ASSEMBLY IS DESIGNED FOR HIGH TEMPERATUTRE APPLICATIONS.
 2. OPERATING TEMPERATURE RANGE: -70°C TO +200°C.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	06/18/2001	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY D.PARHAM	07/02/2001	PRODUCT DESCRIPTION CA BNC M/BNC M RG142B/U
	APPROVED BY R.CARRICK	07/05/2001	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SCALE: NONE CAD FILE: CC142B.SLDDRW SHEET 1 OF 1
COLOR VARIATIONS MAY OCCUR			