


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4558: CN RELEASE	2/16/10	D. CASTRO
F	ECN 6436: UPDATED LOGOS	9/28/12	D. DESJARDIN

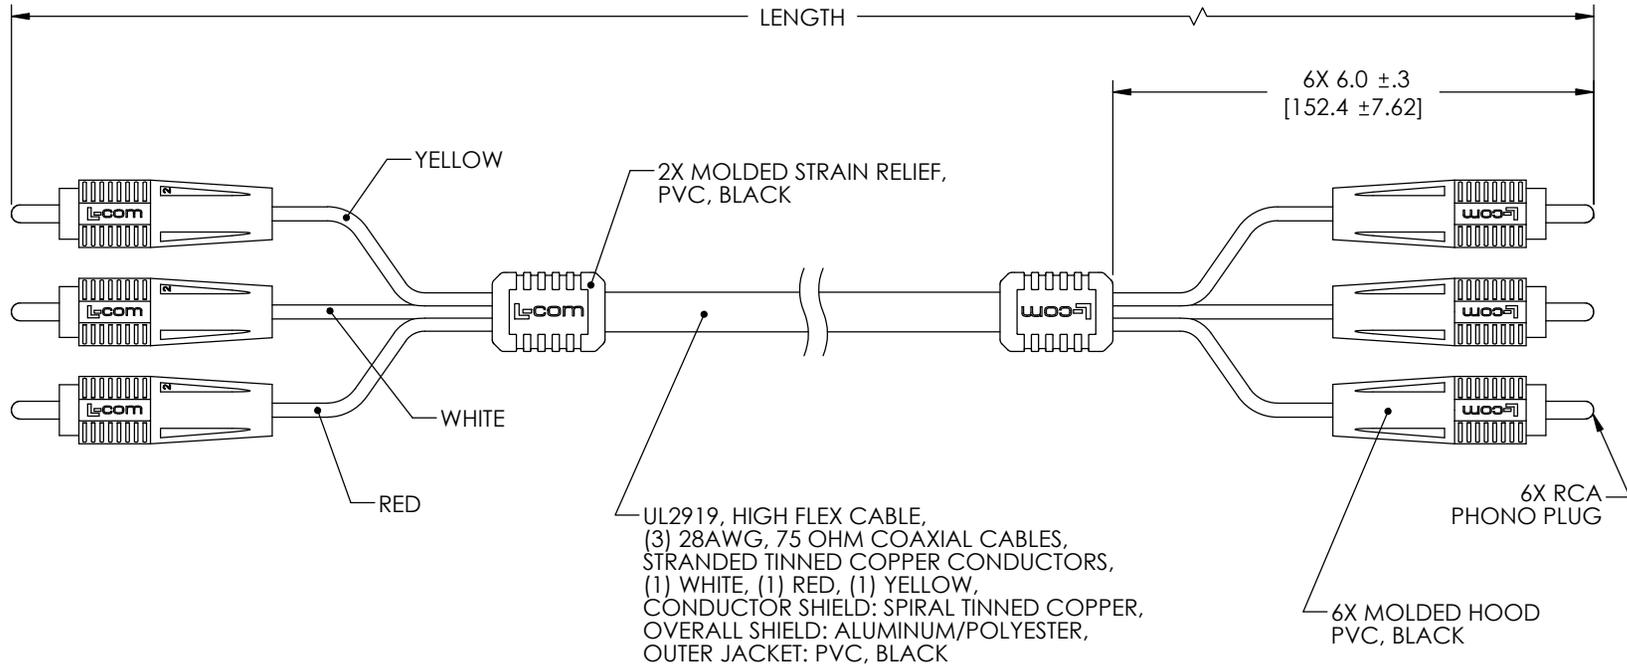

MODEL #	LENGTH	
	FEET	METERS
CCR3MM-2	2.0	0.61
CCR3MM-3	3.0	0.91
CCR3MM-6	6.0	1.83
CCR3MM-9	9.0	2.74
CCR3MM-12	12.0	3.66
CCR3MM-25	25.0	7.62

UL2919, HIGH FLEX CABLE,  
 (3) 28AWG, 75 OHM COAXIAL CABLES,  
 STRANDED TINNED COPPER CONDUCTORS,  
 (1) WHITE, (1) RED, (1) YELLOW,  
 CONDUCTOR SHIELD: SPIRAL TINNED COPPER,  
 OVERALL SHIELD: ALUMINUM/POLYESTER,  
 OUTER JACKET: PVC, BLACK

NOTES:

1. L-COM LOGO IS REQUIRED ON BOTH SIDES OF MOLDED HOODS AND STRAIN RELIEFS.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC. PS-0031

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY MCCORMICK	09/13/01		CATEGORY <b>AUDIO/VIDEO</b>
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY ENG	09/13/01	PRODUCT DESCRIPTION <b>CA THREE RCA M/ RCA M</b>	
PROJECTION 	APPROVED BY R.CARRICK	09/14/01	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SCALE: NONE
	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CCR3MM</b>
			CAD FILE: CCR3MM.SLDDRW	SHEET 1 OF 1