


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7251: MOVED OAL DIM, REMOVED SHRINK TUBE, REVISED ROHS, FORMAT	1/20/14	D.FRISIELLO

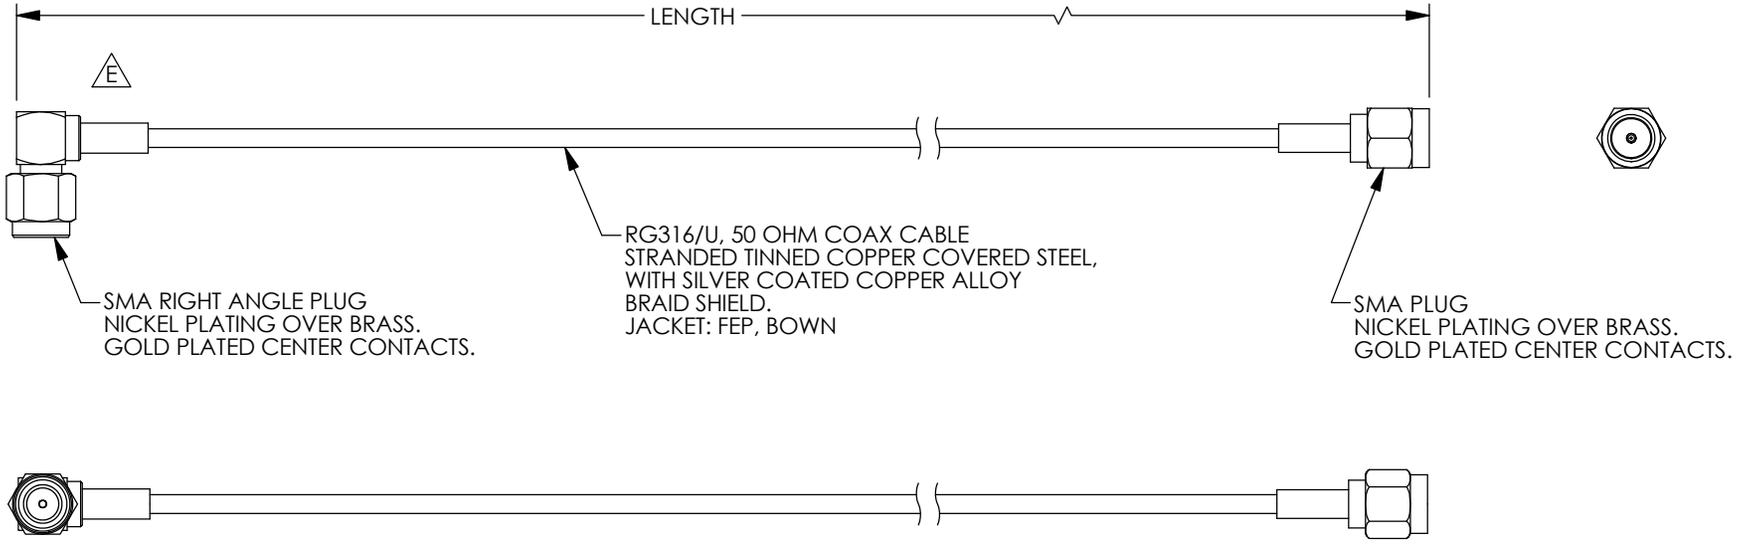

MODEL #	LENGTH	
	FEET	METERS
CCSHR316-1	1.0	0.30
CCSHR316-1.5	1.5	0.46
CCSHR316-2	2.0	0.61
CCSHR316-2.5	2.5	0.76
CCSHR316-3	3.0	0.91
CCSHR316-4	4.0	1.22
CCSHR316-5	5.0	1.52
CCSHR316-7.5	7.5	2.29
CCSHR316-10	10.0	3.05

- NOTES:**
1. CABLE ASSEMBLY IS DESIGNED FOR HIGH TEMPERATURE APPLICATIONS.
 2. OPERATING TEMPERATURE RANGE: -70 °C TO +200 °C.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY MCCORMICK	05/07/01		CATEGORY COAXIAL
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D.PARHAM	05/14/01	PRODUCT DESCRIPTION CA SMA M/SMA M RA RG316/U	
PROJECTION 	APPROVED BY R.CARRICK	05/14/01	SIZE A	FSCM NO. 43321
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		DWG. NO. CCSHR316	REV. E
	COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: CCSHR316.SLDDRW
			SHEET 1 OF 1	