


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	05/14/01	MCCORMICK
B	PRODUCT VALIDATION UPDATES (ECN 1204)	11/06/02	P LECLAIR
C	REVISED CONN PLATING (ECN 1275)	01/02/03	MCCORMICK
D	ECN 3288: UPDATE DWG FORMAT	4/28/08	D.GRIFFIN

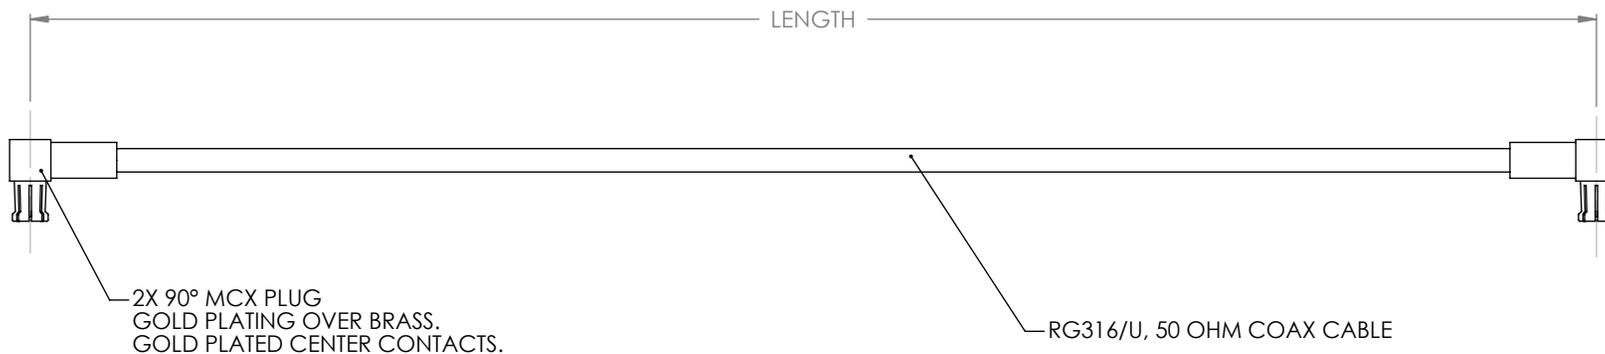

MODEL #	LENGTH	
	FEET	METERS
CCSM316-1	1.0	0.30
CCSM316-1.5	1.5	0.46
CCSM316-2	2.0	0.61
CCSM316-2.5	2.5	0.76
CCSM316-3	3.0	0.91
CCSM316-4	4.0	1.22
CCSM316-5	5.0	1.52
CCSM316-7.5	7.5	2.29
CCSM316-10	10.0	3.05

NOTES:

CABLE ASSEMBLY IS DESIGNED FOR HIGH TEMPERATURE APPLICATIONS (165°C)
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A POLYBAG

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY MCCORMICK	05/08/01	
OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = -2[51] / -0 >60 [1524] ≤ 120 [3048] = +4 / -0 >120 [3048] ≤ 300 [7620] = +6 / -0 >300 [7620] = +5% / -0%	CHECKED BY D.PARHAM	05/11/01	CATEGORY COAXIAL
	ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15	APPROVED BY R.CARRICK	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION CA MCXM RA/MCXM RA RG316/U	
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CCSM316
SCALE: NONE		CAD FILE: CCSM316.SLDDRW	SHEET 1 OF 1