
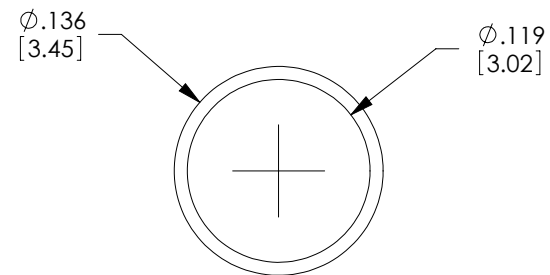


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC., ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/6/12	D.GRIFFIN

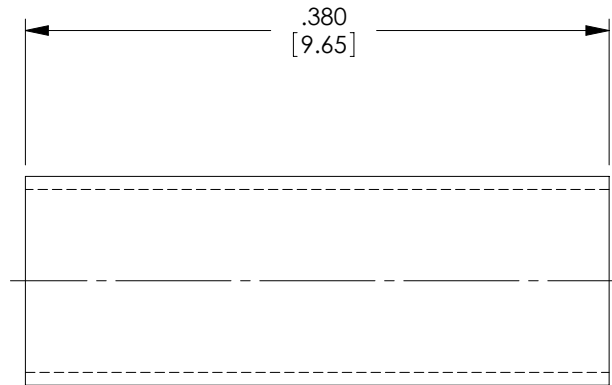

NOTES:

USED WITH 2.50 mm & 3.00mm FIBER.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED
IN A POLY BAG.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ±.005	APPROVALS		DATE		 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO		2/24/12		
	CHECKED BY D.GUTTADAURO		2/24/12		
	APPROVED BY D.GALLAGHER		2/24/12		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY FIBER OPTICS		
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION CRIMP SLEEVE		
	SIZE A		FSCM NO. 43321	DWG. NO. CF83522	REV. A
SCALE: NONE		CAD FILE: CF83522.SLDDRW			SHEET 1 OF 1