


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	10/26/01	TJC
B	ECN # 1120: ADDED L-COM P/N TO SCREW DESCRIPTION	5/9/02	T CLARK
C	ECN# 1624: ADDED COMPONENT SPECIFICATION TABLE	12/30/03	T CLARK
D	ECN 3322: UPDATE DWG FORMAT	5/12/08	D.GRIFFIN

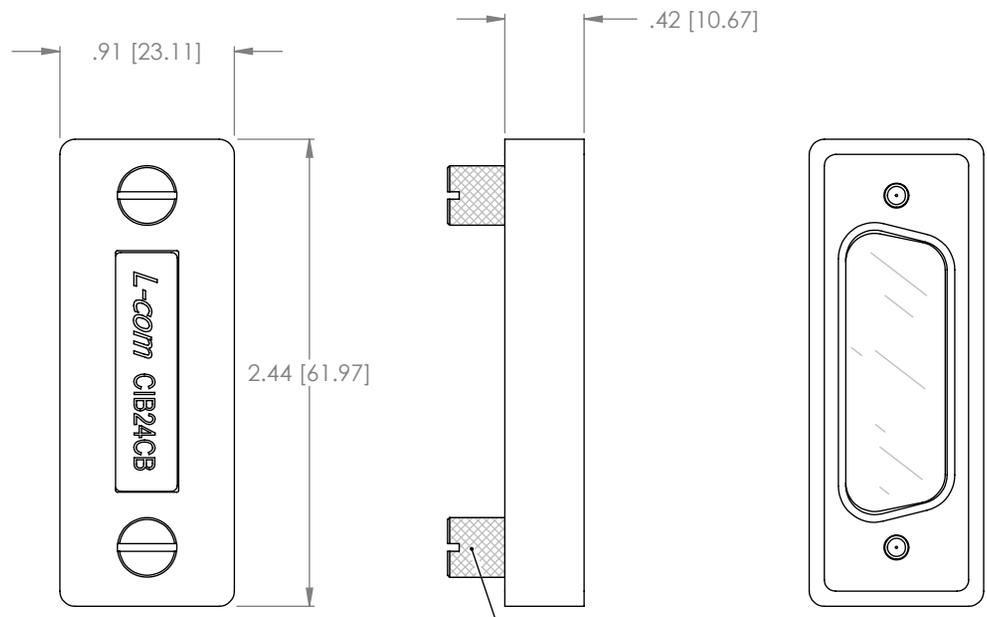

2X ISO M3.5X0.6 SCREWLOCK, KNURLED, CAPTIVE (L-COM P/N 1AJ02-009)

NOTES:

MATERIAL:
 COVER: DIE-CAST ALUMINUM ALLOY
 THUMBSCREW: STEEL
 INSULATING LINER: CLEAR ACRYLIC

FINISH:
 COVER: BLACK ENAMEL
 THUMBSCREW: BLACK OXIDE
 COVER FITS ALL L-COM FEMALE IEEE-488 CABLE AND ADAPTOR CONNECTORS AND MOST SIMILAR PANEL CONNECTORS.
 COVER HAS NON-CONDUCTIVE COATING AND SHIELDING CONNECTION IN INDETERMINATE.

INDIVIDUALLY PACKAGE IN A POLYBAG

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = -2[51] / -0 > 60 [1524] ≤ 120 [3048] = +4 / -0 > 120 [3048] ≤ 300 [7620] = +6 / -0 > 300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15	APPROVALS TJC	DATE 10/22/01		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CHECKED BY DFP	DATE 10/24/01			CATEGORY IEEE-488 GPIB	
	APPROVED BY CM	DATE 10/26/01	PRODUCT DESCRIPTION COVER BLK FOR FEMALE GPIB CONNECTOR			
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CIB24CB
			SCALE: NONE	CAD FILE: CIB24CB.SLDDRW	SHEET 1 OF 1	