




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	10/26/02	T CLARK
B	ECN# 1624: ADDED COMPONENT SPECIFICATON TABLE, MODIFIED NOTES	12/30/03	T CLARK
C	ECN# 2731 - ADDED ROHS STAMP	10/23/07	D.GRIFFIN
D	ECN 3322: UPDATE DRAWING FORMAT	7/17/08	D.GRIFFIN

.75 [19.05] .36 [9.14]

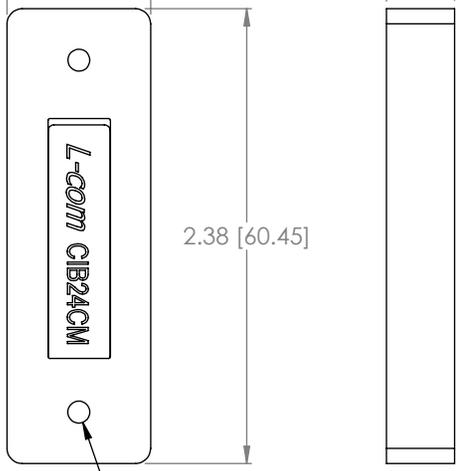

2X ISO M3.5 X 0.6 TAPPED THROUGH HOLE

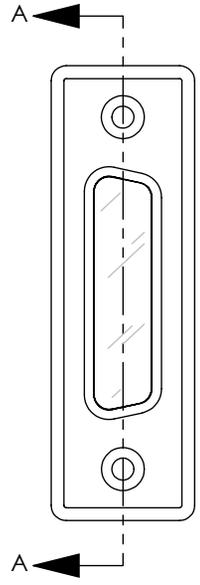

SECTION A-A
SCALE 1 : 1

NOTES:

MATERIAL:
COVER: DIE-CAST ALUMINUM ALLOY
INSULATION LINER: CLEAR ACRYLIC

FINISH:
COVER: NICKEL PLATED
INSULATING: N/A

MISC:
COVER FITS ALL MALE IEEE-488 CABLE AND ADAPTOR CONNECTORS AND MOST SIMILAR PANEL CONNECTORS.
COVER MAKES CONDUCTIVE CONTACT WITH METAL SHELL OF CONNECTOR FOR EFFECTIVE EMI/RFI SHIELDING.

PACKAGING:
INDIVIDUALLY PACKAGE IN A POLYBAG

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = -2[51] / -0 >60 [1524] ≤ 120 [3048] = +4 / -0 >120 [3048] ≤ 300 [7620] = +6 / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15	APPROVALS TJC CHECKED BY DFP APPROVED BY CM	DATE 12/23/2003 10/24/01 10/26/01	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY IEEE-488 GPIB
	PRODUCT DESCRIPTION COVER FOR MALE IEEE-488 CONNECTOR		SIZE A FSCM NO. 43321 DWG. NO. CIB24CM REV. D
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	REF SCALE: NONE CAD FILE: CIB24CM.SLDDRW SHEET 1 OF 1