

6

5

4

3


2

1


## REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	H	ECO-13226: REVISED MODEL AND DIMENSIONS	01/12/2024	DFRISIELLO	GUTTADAURO


F

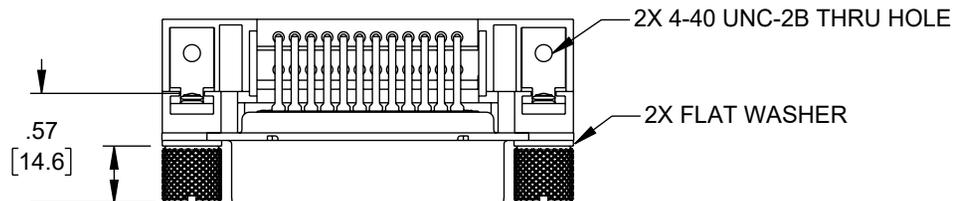

E

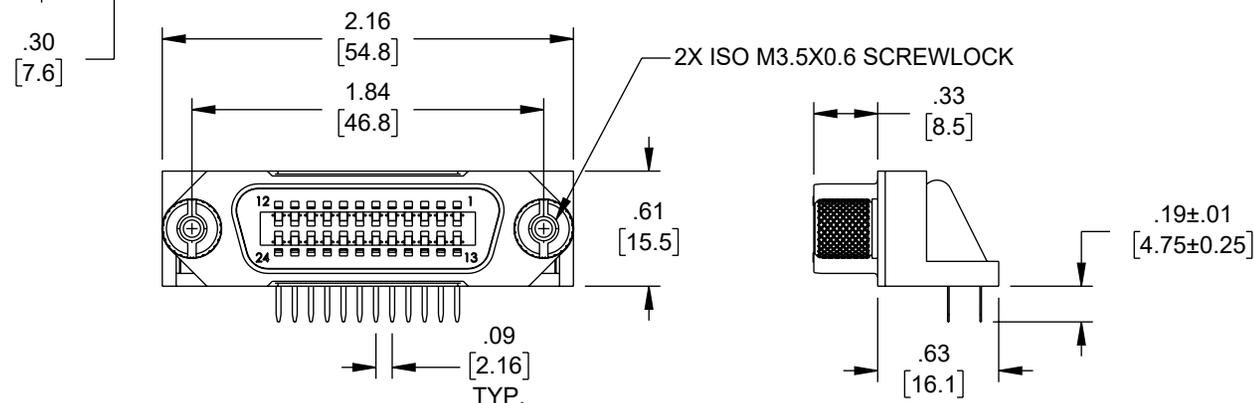

D

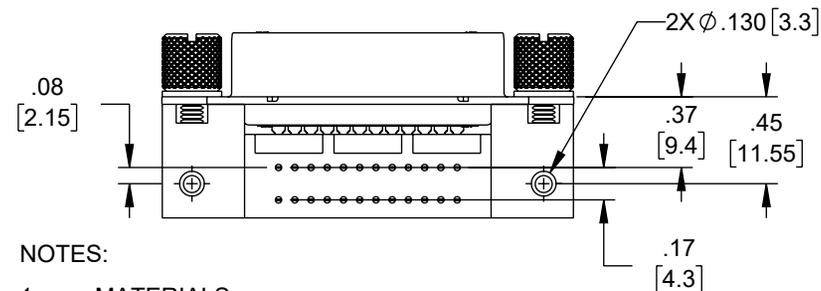

C


## NOTES:

- MATERIALS:  
SHELL: COLD ROLLED STEEL  
CONTACTS: COPPER ALLOY  
INSULATOR: BLUE POLYBUTYLENE TEREPHTHALATE (PBT)  
U.L. 94V-0 RATED
- FINISHES:  
CONTACTS: GOLD PLATED  
TERMINALS: TINNED  
SHELL: NICKEL PLATED  
SCREWLOCKS: BLACK OXIDE  
SUPPLIED WITH HARDWARE ASSEMBLED.
- TYPICAL OPERATING VOLTAGE IS 30 VOLTS
- MAXIMUM VOLTAGE RATING IS 500 VOLTS.
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IAW L-COM SPEC. PS-0031.

A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

## RECOMMENDED PCB HOLE LAYOUT

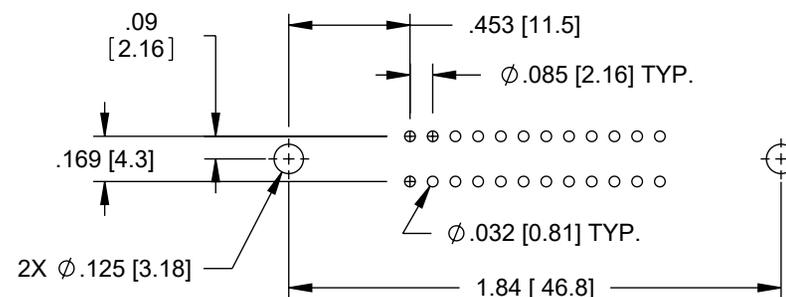

F

E

D

C

B

A

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS


TOLERANCES:  
X = ±.2 [5] | FRACTIONS  
.XX = ±.02 [0.5] | ± 1/32  
.XXX = ±.005 [0.13] | ANGLES ± 1°

CABLE LENGTH TOLERANCES:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤ 60 [1524] = +2 [51] / -0  
>60 [1524] ≤ 120 [3048] = +4 [102] / -0  
>120 [3048] ≤ 300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

**L-com**  
an INFINIT® brand

Website: www.L-com.com  
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION

CONNECTOR GPIB RA FEMALE

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	DFRISIELLO	CIB24SRA	H

6

5

4

3

2

1