
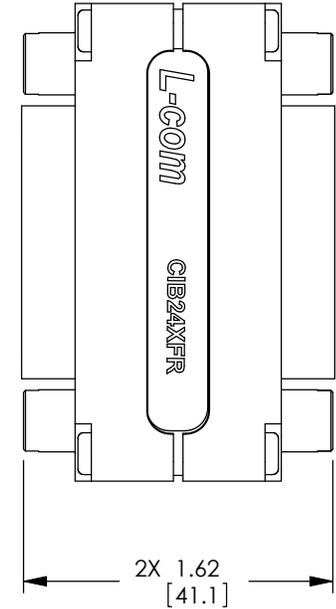
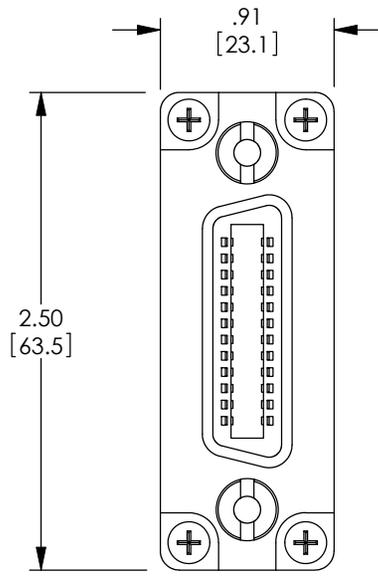
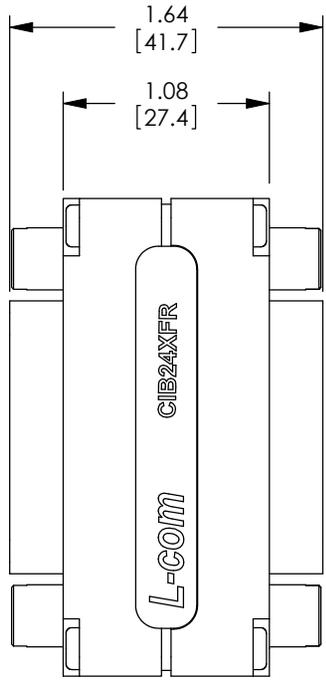


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED TO PRODUCTION	8/27/01	R. CARRICK
B	ADDED COMPONENT SPECIFICATION TABLE	12/31/03	T. CLARK
C	ECN 4547; REVISED DRAWING AND NEW FORMAT	2/9/10	D. FRISIELLO

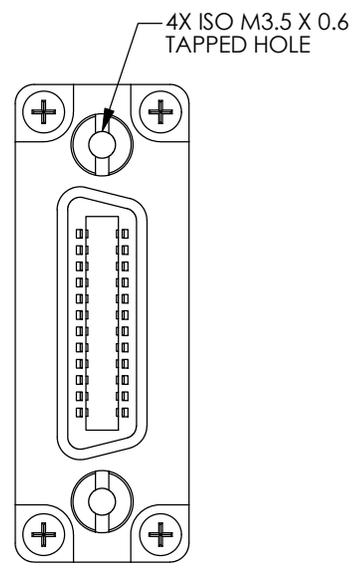

NOTES:

MATERIAL:
 HOUSING: DIE-CAST ALUMINUM ALLOY.
 CONNECTOR INSULATOR: GLASS-FILLED PBT, BLUE, UL94V-0 RATED.
 CONNECTOR CONTACTS: 24X, COPPER ALLOY, RIBBON, .085" PITCH.
 THUMBSCREWS: STEEL.

FINISH:
 HOUSING: NICKEL PLATED.
 CONNECTOR CONTACTS: 30μ INCHES GOLD PLATED OVER NICKEL.
 THUMBSCREWS: BLACK OXIDE.

ELECTRICAL:
 VOLTAGE RATING: 200 VOLTS.
 CURRENT RATING: 1 AMP PER CONTACT AT 25°C.
 INSULATION RESISTANCE: 1 GIGAOHMS

MISCELLANEOUS:
 OPERATING TEMPERATURE RANGE: -40°C TO +85°C.
 WIRED STRAIGHT THROUGH, PIN TO LIKE-NUMBERED PIN AND MEETS ANSI/IEEE STD 488.1-1987.
 TWO DUST CAPS PROVIDED FOR CONNECTORS (NOT SHOWN).
 ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY RON CARRICK	8/27/2001	
	CHECKED BY DOUG PARHAM	8/27/2001	
DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.02 .XXX = ±.005	APPROVED BY C. MCCORMICK	8/27/2001	CATEGORY IEEE-488
	ANGULAR TOLERANCES: ALL = ± 1°		PRODUCT DESCRIPTION IEEE-488 REVERSING EXTENDER, M/F
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. CIB24XFR REV. C SCALE: NONE CAD FILE: CIB24XFR.SLDDRW SHEET 1 OF 1