


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/30/2010	BPUCHASKI
B	ECN#6043 MODIFIED INTERNAL ASSEMBLY HARDWARE	03/22/2012	BPUCHASKI
C	ECN 9847: REVISED NUMBERING ON CASE, DIMS, FORMAT	05/08/2019	DREBECK

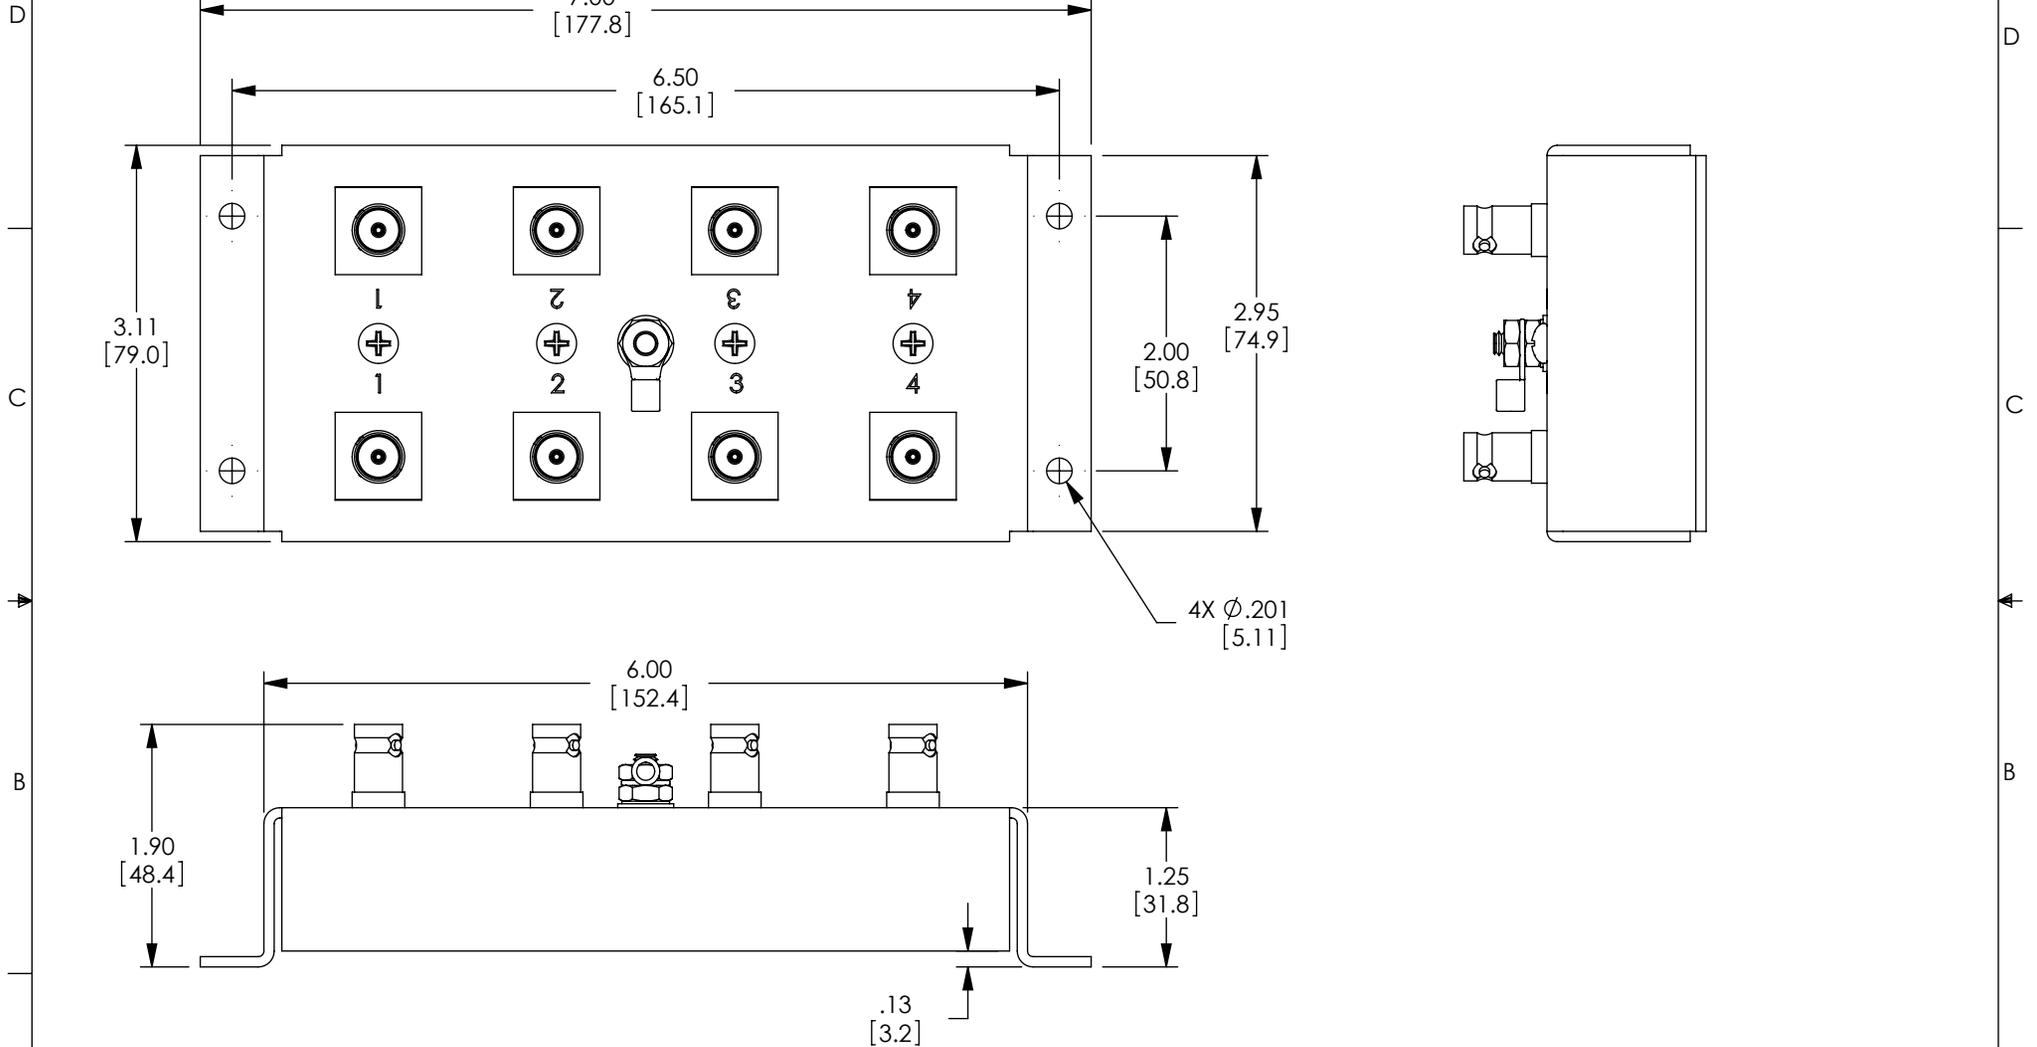

NOTES:

1. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PKG-00012

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	APPROVALS DRAWN BY BPUCHASKI	DATE 06/30/2010		50 HIGH STREET NORTH ANDOVER, MA 01845	
	CHECKED BY M.AUDAS	DATE 06/30/2010		CATEGORY LIGHTNING PROTECTORS	
	APPROVED BY M.AUDAS	DATE 06/30/2010	PRODUCT DESCRIPTION 4-Port Video Indoor Lightning Protector		
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CMSP-VIDEO-4

SCALE: NONE	CAD FILE: CMSP-VIDEO-4.SLDDRW	SHEET 1 OF 1
-------------	-------------------------------	--------------