


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/18/08	D.GRIFFIN

CONNECTOR SPECIFICATIONS:
 -HOUSING
 MATERIAL: ABS-PC
 COLOR: LIGHT GRAY
 FLAMMABILITY RATING: UL94v-0
 -CONTACTS PLATING: GOLD

LATCH RELEASE



.43
[11.0] .73
[18.6]




LATCH, (1) EACH SIDE

1.47
[37.3]

1.71
[43.5]

.47
[12.0]

.21
[5.4]

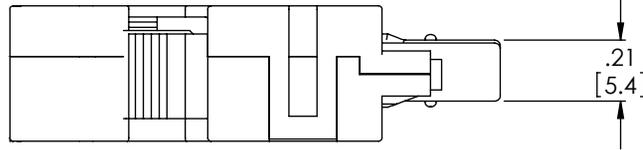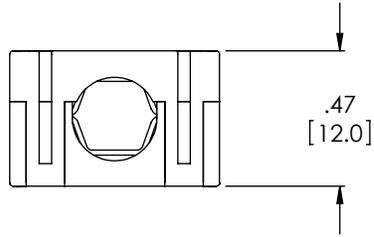

NOTES:

1. EACH CONNECTOR ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A POLYMER BAG.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION	APPROVALS E. STAUBLE	DATE 2008.07.16		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CHECKED BY D. PARHAM	2008.07.17		CATEGORY DATA		
	APPROVED BY S. SMITH	2008.07.17	PRODUCT DESCRIPTION CN1394L-1 CONNECTOR, TYPE 1 PLUG, 6 POS, LATCHING			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CN1394L-1	REV. A
		SCALE: NONE	CAD FILE: CN1394L-1.SLDDRW		SHEET 1 OF 1	