


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 3358: NEW MOLDING, SCREWS & WIRE COLOR TABLE, FORMAT UPDATED	5/30/08	E. STAUBLE
G	ECN 4474: ADDED 1.0 FT LENGTH, UPDATED FORMAT, ADDED NOTES & RoHS	1/7/10	D. CASTRO
H	ECN4813: ADDED 26AWG & PANTONE 400C TO CABLE DESCRIPTION. ADDED LOGO NOTE.	6/14/10	DFP
J	ECN4897: ADDED SCREWLOCKS. 4X THUMBSCREWS WAS 2X THUMBSCREWS.	7/08/10	DFP

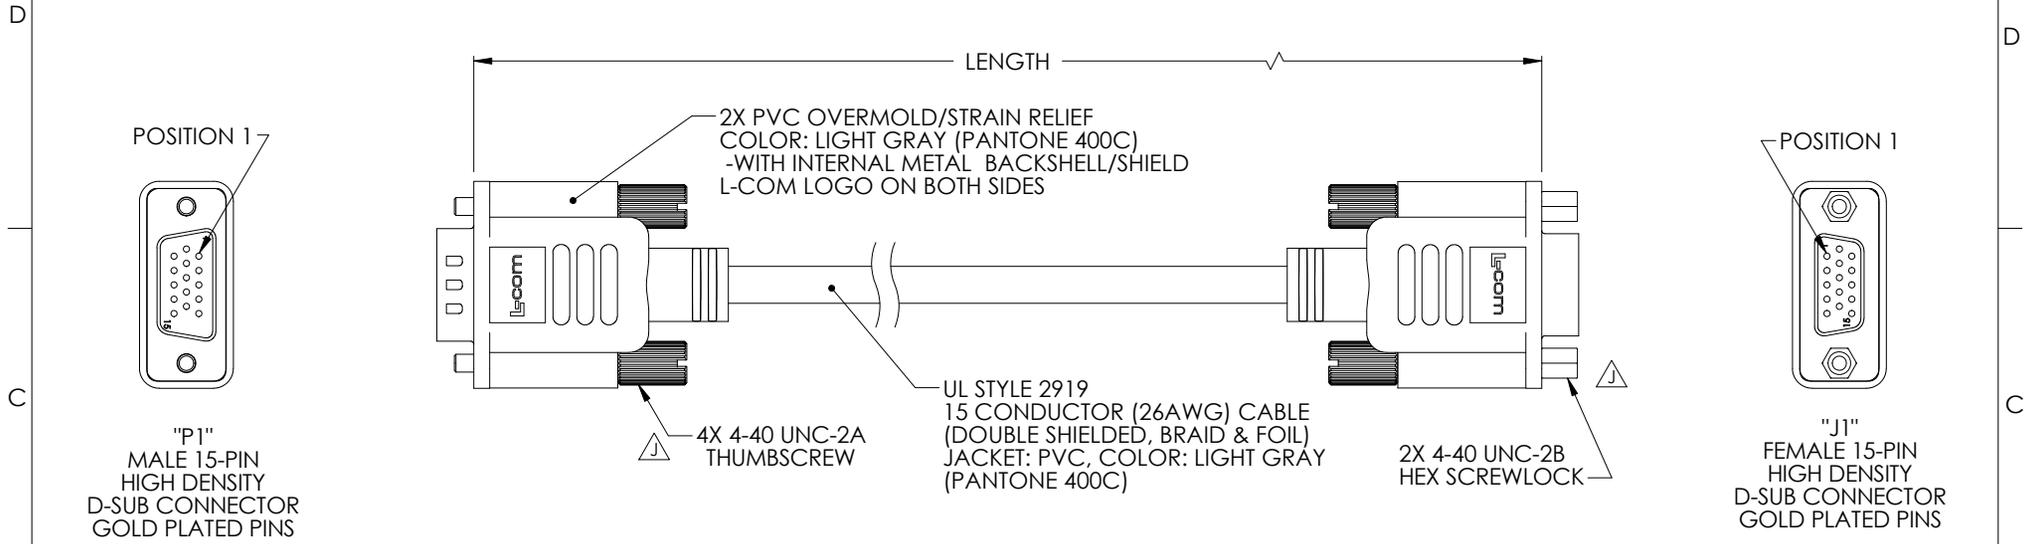

"P1"	WIRE COLOR	"J1"
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	VIOLET	8
9	GRAY	9
10	WHITE	10
11	PINK	11
12	LIGHT GREEN	12
13	BLACK / WHITE	13
14	BROWN / WHITE	14
15	RED/ WHITE	15
SHELL	DRAIN WIRE	SHELL

MODEL NUMBER	LENGTH	
	FEET	METERS
CS2H15MF-1	1.0	0.31
CS2H15MF-2.5	2.5	0.76
CS2H15MF-5	5.0	1.52
CS2H15MF-6	6.0	1.83
CS2H15MF-10	10.0	3.05
CS2H15MF-12	12.0	3.66
CS2H15MF-15	15.0	4.57
CS2H15MF-25	25.0	7.62
CS2H15MF-50	50.0	15.24

**NOTES:**

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $>12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $>60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $>120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $>300$ [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY TJC CHECKED BY DFP APPROVED BY RC	DATE 9/28/01 9/28/01 10/3/01	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY D-SUBMINIATURE
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
	DWG. NO. <b>CS2H15MF</b>		REV. <b>J</b>	SCALE: NONE CAD FILE: CS2H15MF.SLDDRW SHEET 1 OF 1