
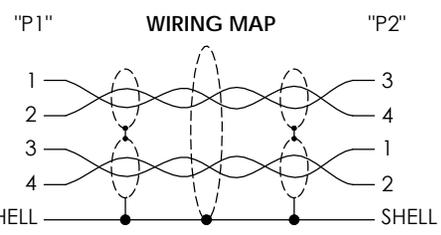


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	APPROVED FOR PRODUCTION PER STEVE SMITH	10/21/02	MCCORMICK
B	ECN #1677 REVISED WIRING TABLE	02/20/04	MCCORMICK
C	ECN 3798: CN RELEASE AND NEW FORMAT	2/6/09	D.FRISIELLO
D	ECN 6899: UPD FORMAT/PKG. CONTACTS FROM 30u" GOLD TO GOLD FLASH	6/14/13	D_DESJARDIN

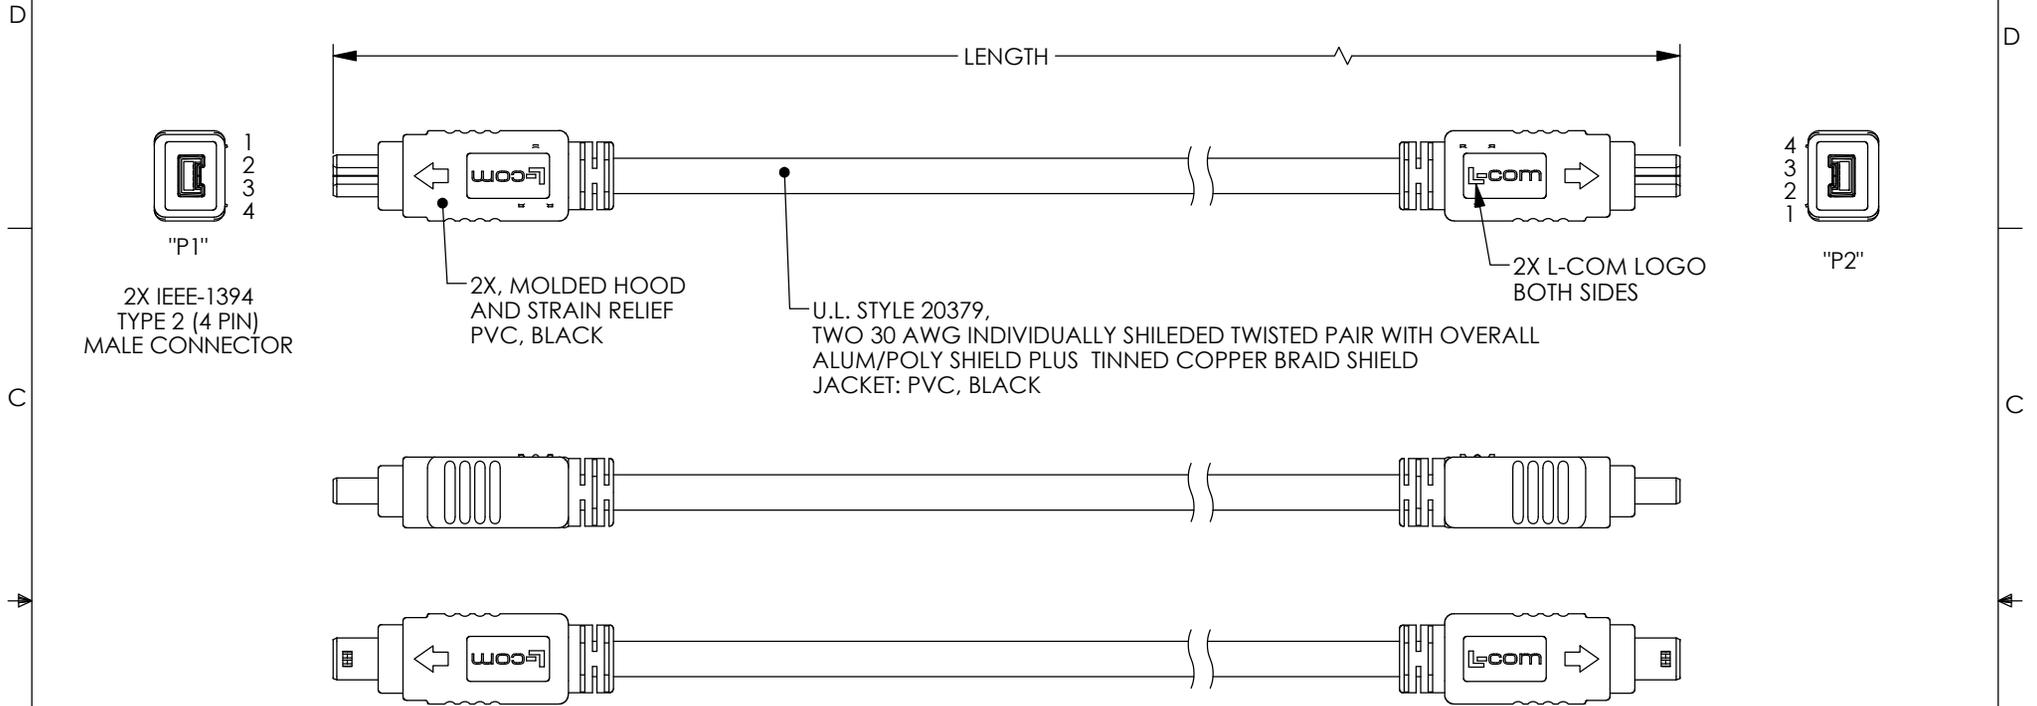

MODEL NUMBER	LENGTH	
	METERS	FEET
CSM94-05M3	0.5	1.64
CSM94-1M3	1.0	3.28
CSM94-2M3	2.0	6.56
CSM94-3M3	3.0	9.84
CSM94-5M3	5.0	16.40

- NOTES:**
- CABLE ASSEMBLY CONSTRUCTED TO MEET THE REQUIREMENTS OF THE IEEE-1394 (FIREWIRE) SPECIFICATION.
  - CONTACT FINISH: GOLD FLASH.
  - TWISTED PAIRS INDIVIDUALLY SHIELDED. SHIELDS TIED TOGETHER.
  - CABLE OVERALL SHIELD CONNECTED TO METAL SHELLS OF BOTH PLUGS. OVERALL SHIELD CONNECTED TO TWISTED PAIRS' SHIELDS.
  - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - TRIM AND SECURE ALL UNUSED CONDUCTORS.
  - CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	09/24/02		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D.PARHAM	09/24/02	I/O PRODUCTS	
	APPROVED BY R.CARRICK	09/24/02		
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CBL, IEEE1394 TYPE 2/2	
	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CSM94-M3</b>
		SCALE: NONE	CAD FILE: CSM94-M3.SLDDRW	REV. <b>D</b>
				SHEET 1 OF 1