
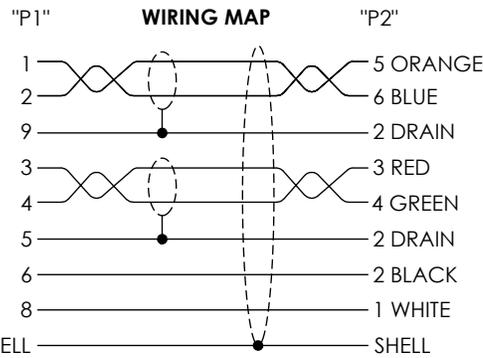


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6628: UPDATED FORMAT AND LOGOS, ADDED PACKAGING AND ROHS	1/18/13	D. DESJARDIN
F	ECN 6899: CHANGED CONTACTS FROM 30µ" GOLD TO GOLD FLASH	6/14/13	D. DESJARDIN
G	ECN 7190: REVISED CONN "P1" TO BILINGUAL, FORMAT, ROHS	12/9/13	D. FRISIELLO
H	ECN 8978: REVISE CONNECTIVE DETAIL FOR TWIST PAIR OF WIRING MAP	11/03/2017	B.ZHANG

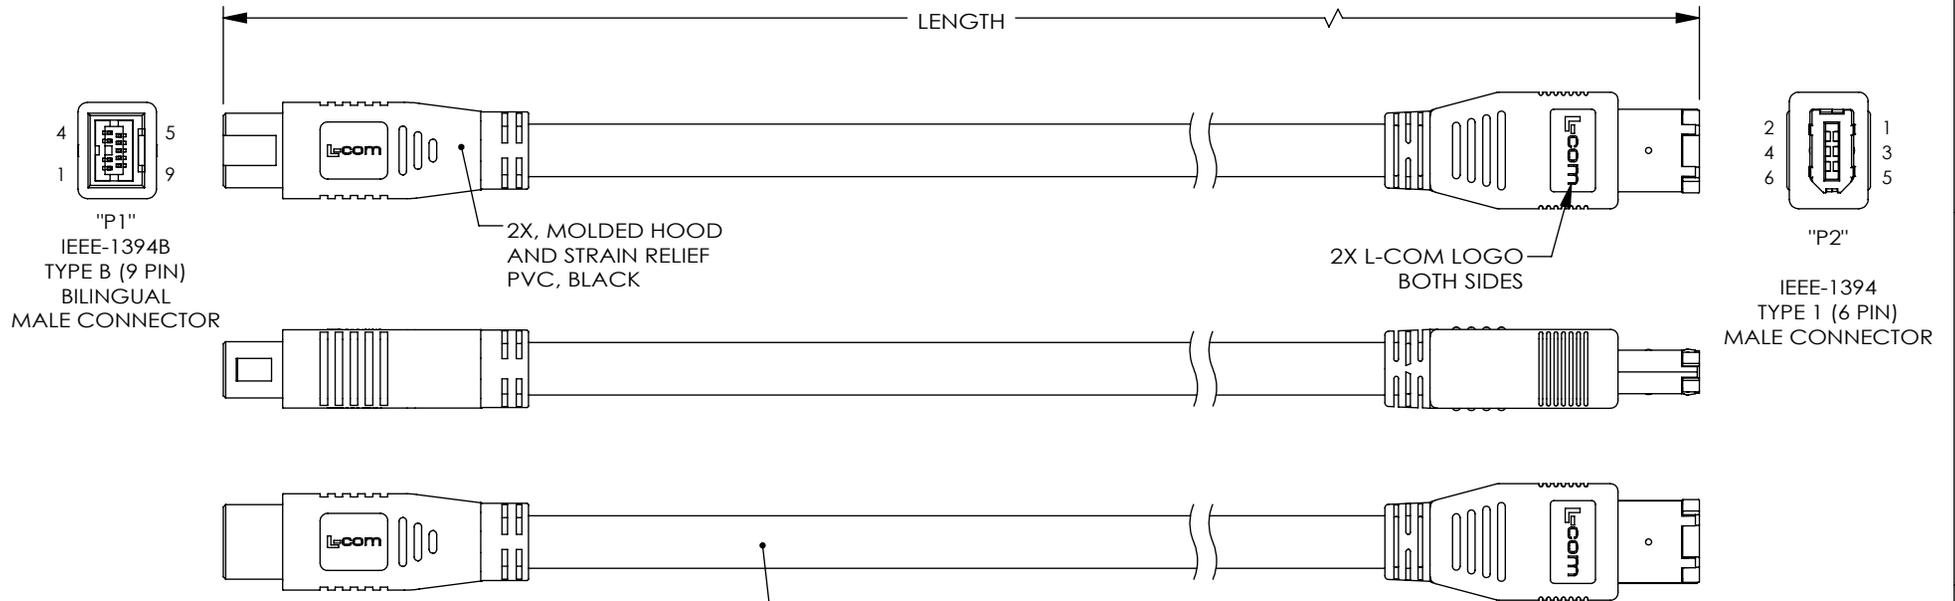

U.L. STYLE 20276,
TWO, 26 AWG INDIVIDUALLY SHIELED TWISTED PAIR WITH TINNED COPPER DRAIN WIRE.
TWO, 22 AWG STRANDED CONDUCTORS WITH OVERALL ALUM/POLY SHIELD PLUS TINNED COPPER BRAID SHIELD.
JACKET: PVC, BLACK

MODEL NUMBER	LENGTH	
	METERS	FEET
CSM94B1-1M	1.0	3.28
CSM94B1-2M	2.0	6.56
CSM94B1-3M	3.0	9.84
CSM94B1-5M	5.0	16.40

- NOTES:**
- CABLE ASSEMBLY CONSTRUCTED TO MEET THE REQUIREMENTS OF THE IEEE-1394B (FIREWIRE) SPECIFICATION.
 - CONTACT FINISH: GOLD FLASH.
 - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	12/11/2003		CATEGORY I/O PRODUCTS
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D.PARHAM	12/11/2003	PRODUCT DESCRIPTION CBL,IEEE1394B 9/6POS	
PROJECTION 	APPROVED BY R.CARRICK	12/11/2003	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SCALE: NONE
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CSM94B1	REV. H
CAD FILE: CSM94B1.SLDDRW			SHEET 1 OF 1	