



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	ECN 6628: UPDATED FORMAT AND LOGOS. ADDED PACKAGING AND ROHS	1/21/13	D. DESJARDIN
E	ECN 7190: DESCRIPTION TO BETA, REVISED PICT.OF CONN, FORMAT	12/9/13	D. FRISIELLO
F	ECN 8978: REVISE CONNECTIVE DETAIL FOR TWIST PAIR OF IRING MAP		B.ZHANG

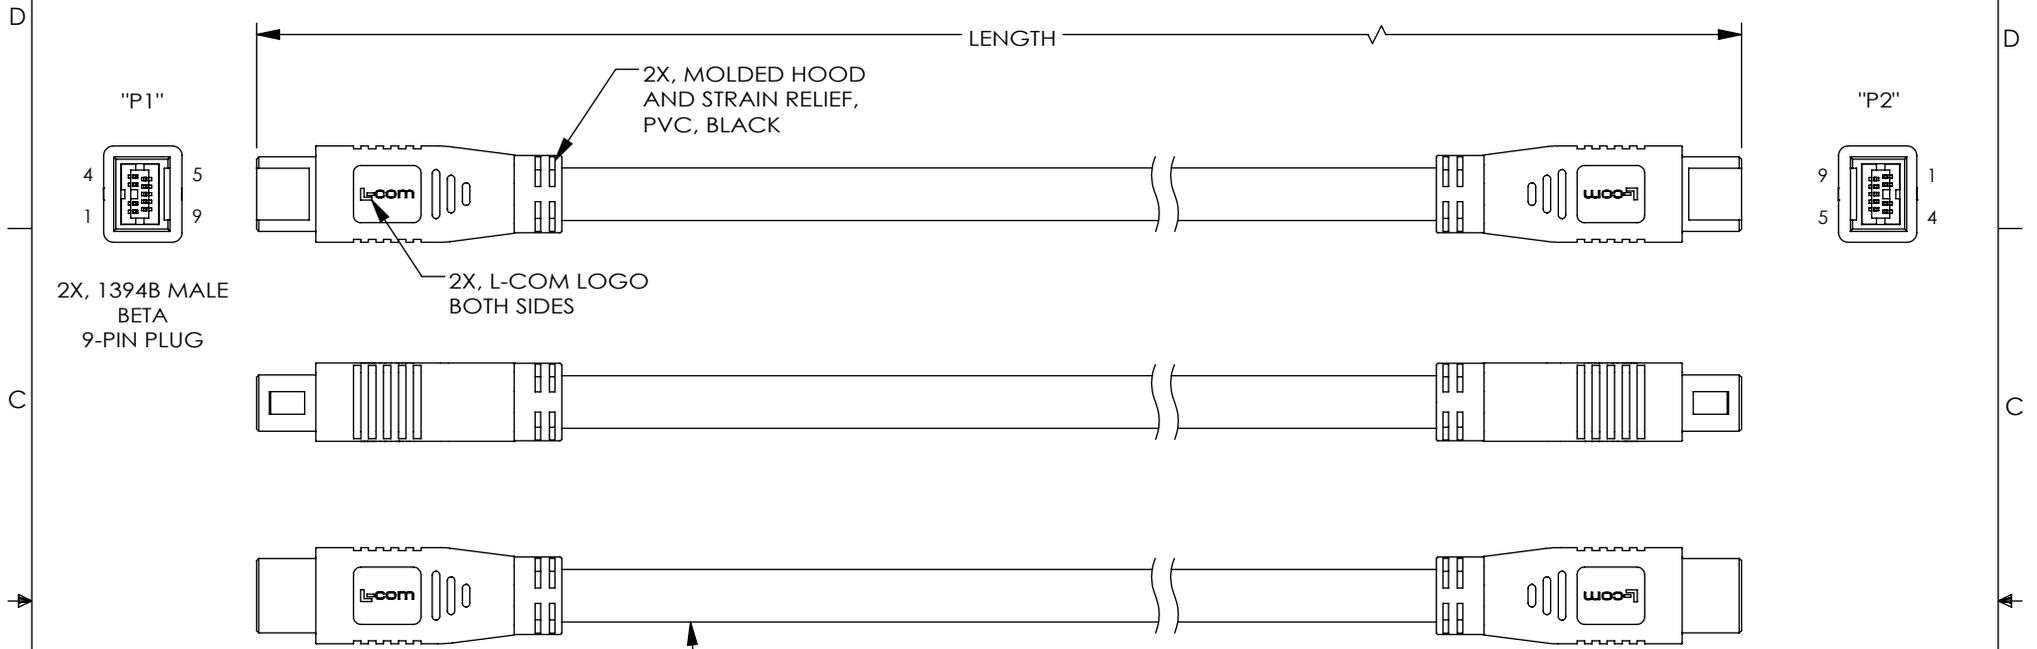

2X, 1394B MALE BETA 9-PIN PLUG

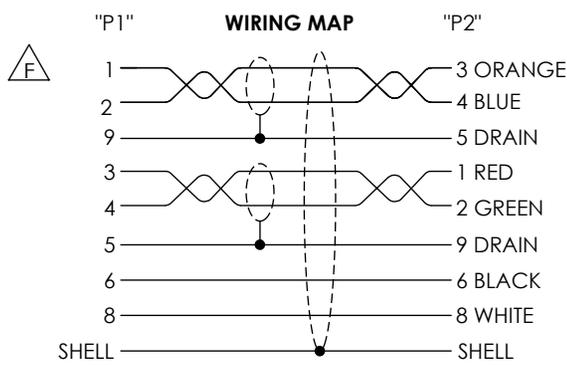

U.L. STYLE 20276,  
TWO, 26 AWG INDIVIDUALLY SHIELED TWISTED PAIR (CU-PT AND TRANSPARENT POLYESTER SPIRALLY WRAPPED) WITH TINNED COPPER DRAIN WIRE.  
TWO, 22 AWG STRANDED CONDUCTORS WITH OVERALL ALUM/POLY SHIELD PLUS TINNED COPPER BRAID SHIELD AND DRAIN WIRE.  
JACKET: PVC, BLACK

PART NUMBER	LENGTH, METERS [FEET]
CSM94BB-1M	1.0 [3.28]
CSM94BB-2M	2.0 [6.56]
CSM94BB-3M	3.0 [9.84]
CSM94BB-5M	5.0 [16.41]

- NOTES:**
- CABLE ASSEMBLY CONSTRUCTED TO MEET THE REQUIREMENTS OF THE IEEE-1394B (FIREWIRE) SPECIFICATION.
  - CABLE SHALL BE TESTED FOR CONTINUITY.
  - CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE			50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	12/11/2003			CHECKED BY D.PARHAM
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY <b>I/O PRODUCTS</b>		
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CSM94BB</b>	REV. <b>F</b>
		SCALE: NONE	CAD FILE: CSM94BB.SLDDRW		SHEET 1 OF 1