
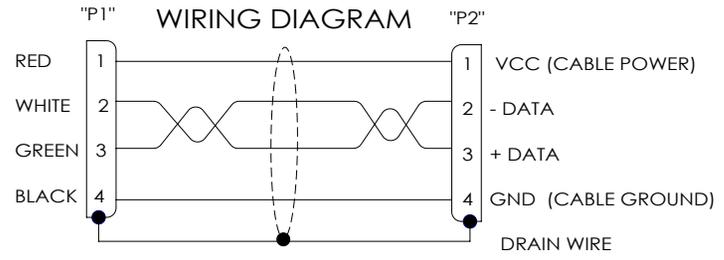



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/2/13	D.GRIFFIN
B	ECN 12105: UPDATE PVC ARMOR TO PP ARMOR, UPDATE OVERMOLD	09/27/2022	R.CARLESCO

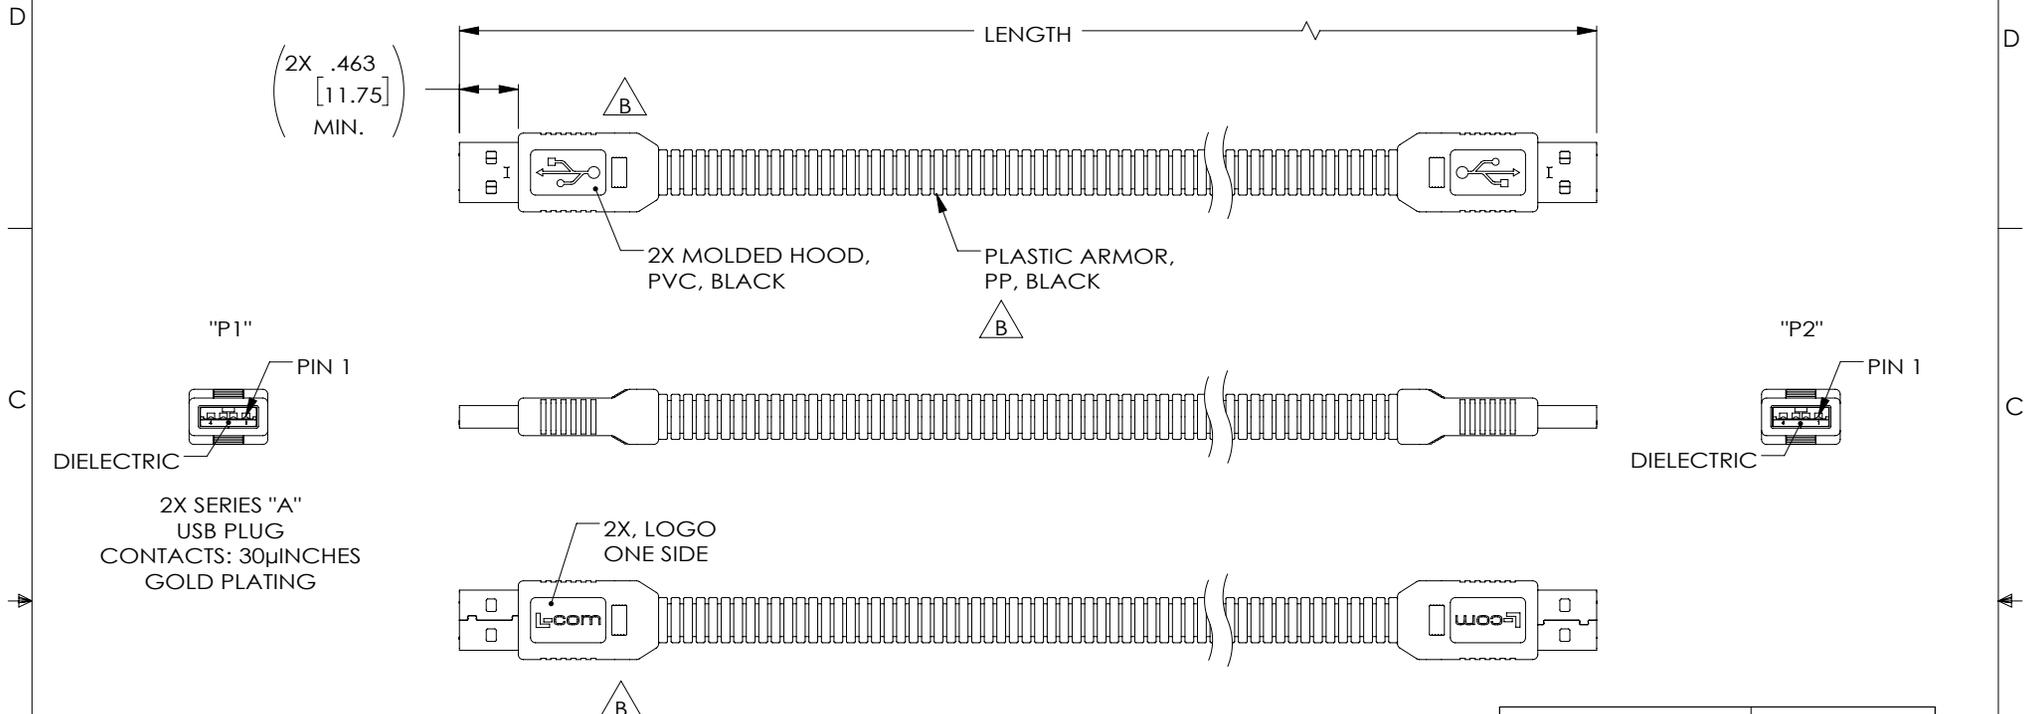

MODEL NO.	LENGTH METERS [FEET]
CSMUAA-PL-03M	0.3 [.98]
CSMUAA-PL-05M	0.5 [1.64]
CSMUAA-PL-1M	1.0 [3.28]
CSMUAA-PL-2M	2.0 [6.56]
CSMUAA-PL-3M	3.0 [9.84]
CSMUAA-PL-4M	4.0 [13.12]
CSMUAA-PL-5M	5.0 [16.41]

- NOTES:**
- CABLE:**
 UL STYLE 2725,
 ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
 TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE.
 PVC OUTER JACKET, BLACK
- MISCELLANEOUS:**
1. PLASTIC CRUSH RESISTANCE: 800 PSI (MIN.)
 2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 3. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS D. DESJARDIN CHECKED BY D. FRISIELLO APPROVED BY S. SMITH	DATE 1/3/12 1/11/13 1/24/13	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY USB	
THIRD-ANGLE PROJECTION 	SIZE A	CAGE CODE 43321	DWG. NO. CSMUAA-PL
SCALE: NONE		CAD FILE: CSMUAA-PL.SLDRW	REV. B SHEET 1 OF 1