
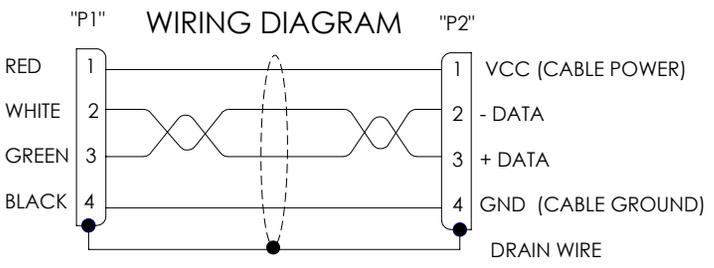

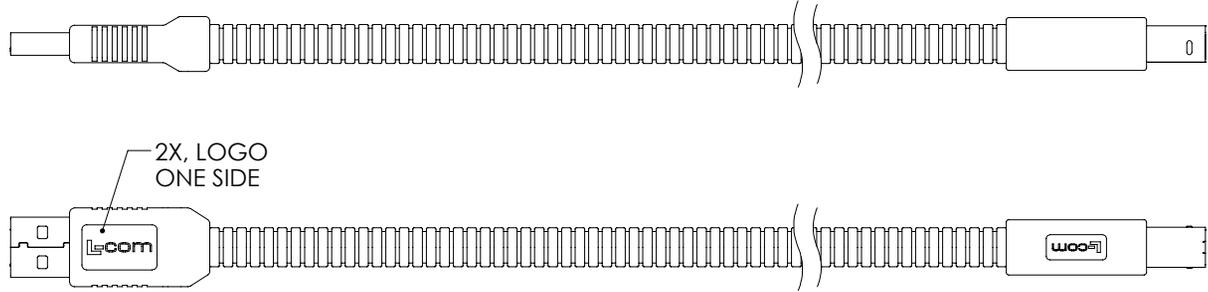


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/13/13	D.GRIFFIN



MODEL NO.	LENGTH METERS [FEET]
CSMUAB-PL-03M	0.3 [.98]
CSMUAB-PL-05M	0.5 [1.64]
CSMUAB-PL-1M	1.0 [3.28]
CSMUAB-PL-2M	2.0 [6.56]
CSMUAB-PL-3M	3.0 [9.84]
CSMUAB-PL-4M	4.0 [13.12]
CSMUAB-PL-5M	5.0 [16.41]

NOTES:

- CABLE:**
 UL STYLE 2725,
 ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
 TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE.
 PVC OUTER JACKET, BLACK
- MISCELLANEOUS:**
 1. PLASTIC CRUSH RESISTANCE: 800 PSI (MIN.)
 2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 3. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. DESJARDIN	1/3/12		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. FRISIELLO	1/11/13	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY S. SMITH	1/24/13	CA USB 2.0 A/B PLAS ARMR	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. CSMUAB-PL	REV. A
			SCALE: NONE	CAD FILE: CSMUAB-PL.SLDDRW
				SHEET 1 OF 1