

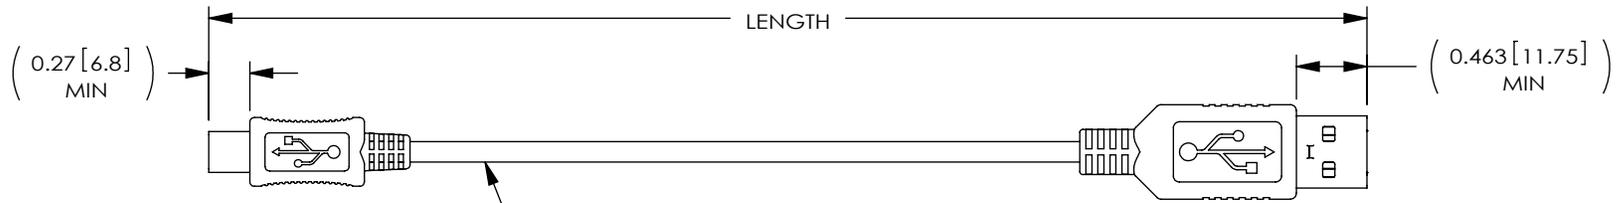
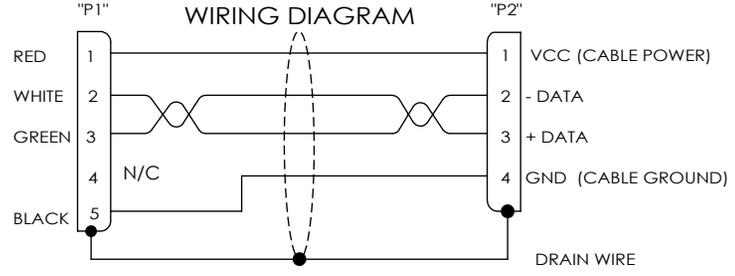



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	ECN 5848: ADDED LENGTHS 03 M, 075 M, NEW FORMAT, PACKAGING NOTE	12/1/11	D.FRISIELLO
K	ECN5915: REVISED END VIEW OF USB TYPE A MALE	01/10/12	DFP
L	ECN6237: ADDED CONTACT PLATING NOTE, UPDATED FORMAT.	09/18/12	DFP
L	ECN 99999: UPDATE TO CORRECT ORIENTATION OF LOGO ON MINI B END	1/13/16	S.LI

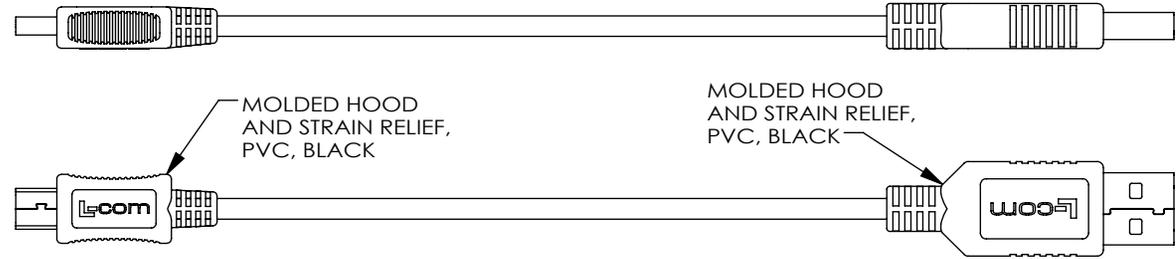

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR  
 TWO 28AWG STRANDED TINNED COPPER CONDUCTORS  
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE  
 PLUS TINNED COPPER BRAIDED SHIELD.  
 PVC OUTER JACKET, BLACK



MODEL NO.	LENGTH METERS [FEET]
CSMUAMB5-03M	0.3 [.98]
CSMUAMB5-05M	0.5 [1.64]
CSMUAMB5-075M	0.75 [2.46]
CSMUAMB5-1M	1.0 [3.28]
CSMUAMB5-2M	2.0 [6.56]
CSMUAMB5-3M	3.0 [9.84]

- NOTES:
- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
  - CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
  - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY T.CLARK	05/21/2002	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [13]	CHECKED BY D.PARHAM	05/27/2002	PRODUCT DESCRIPTION <b>CABLE, USB-A/MINI-B 5POS</b>
	APPROVED BY R.CARRICK	05/27/2002	
PROJECTION	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CSMUAMB5</b>
	SCALE: NONE	CAD FILE: CSMUAMB5.SLDDRW	SHEET 1 OF 1