

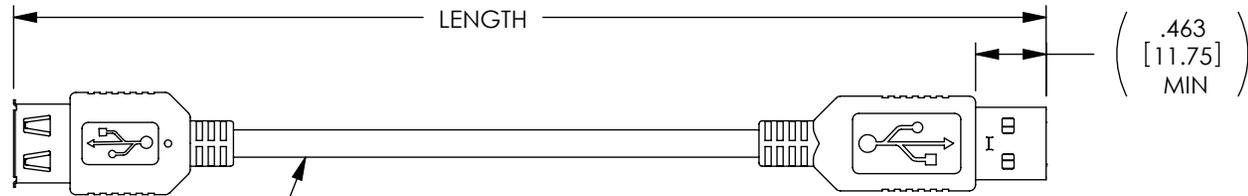


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	ECN 8854: UPDATE FEMALE END AS SHORTER SIZE MOLDING	07/14/17	S.LJ



ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
 TWO 20AWG STRANDED TINNED COPPER CONDUCTORS
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE PLUS TINNED COPPER BRAIDED SHIELD.
 PVC OUTER JACKET, LIGHT GRAY (PANTONE 400C)




"P1"
 SERIES "A"
 USB PLUG
 CONTACTS: 30 μINCHES
 GOLD PLATING



"J1"
 SERIES "A"
 USB RECEPTACLE
 CONTACTS: 30 μINCHES
 GOLD PLATING

2X MOLDED HOOD
 AND STRAIN RELIEF
 PVC, LIGHT GRAY
 (PANTONE 400C)

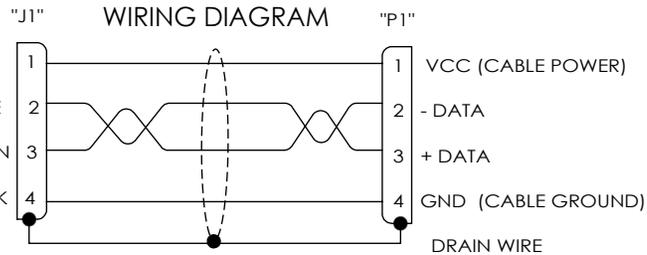

MODEL NUMBER	LENGTH	
	METERS	FEET
CSMUAX-03M	0.3	.98
CSMUAX-05M	0.5	1.64
CSMUAX-075M	0.75	2.46
CSMUAX-1M	1.0	3.28
CSMUAX-2M	2.0	6.56
CSMUAX-3M	3.0	9.84

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D.PARHAM	03/08/2002		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	CHECKED BY T.CLARK	03/08/2002	PRODUCT DESCRIPTION	CABLE, USB TYPE A M/F EXT
PROJECTION	APPROVED BY R.CARRICK	03/08/2002	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A
	COLOR VARIATIONS MAY OCCUR	REF	SCALE: NONE	FSCM NO. 43321
			CAD FILE: CSMUAX.SLDDRW	DWG. NO. CSMUAX
				REV. K
				SHEET 1 OF 1