


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/5/14	D.GRIFFIN
-	-	-	-
-	-	-	-
-	-	-	-

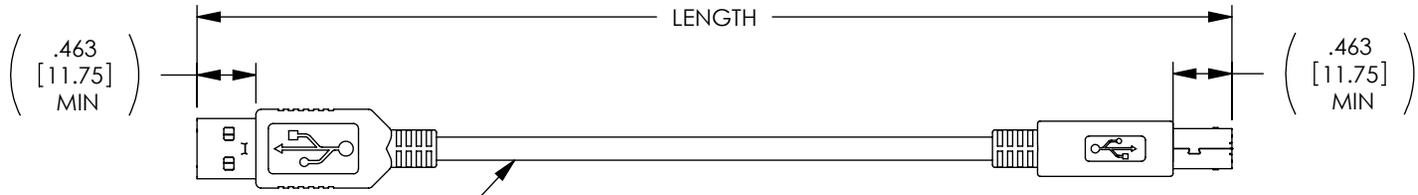


ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR  
 TWO 20AWG STRANDED TINNED COPPER CONDUCTORS  
 OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE  
 PLUS TINNED COPPER BRAIDED SHIELD.  
 PVC OUTER JACKET, CLEAR

MOLDED HOOD  
 AND STRAIN RELIEF,  
 PVC, CLEAR

"P1"  
 SERIES A  
 USB PLUG  
 CONTACTS: 30 μINCHES  
 GOLD PLATING

"P2"  
 SERIES B  
 USB PLUG  
 CONTACTS: 30 μINCHES  
 GOLD PLATING

MOLDED HOOD  
 AND STRAIN RELIEF,  
 PVC, CLEAR

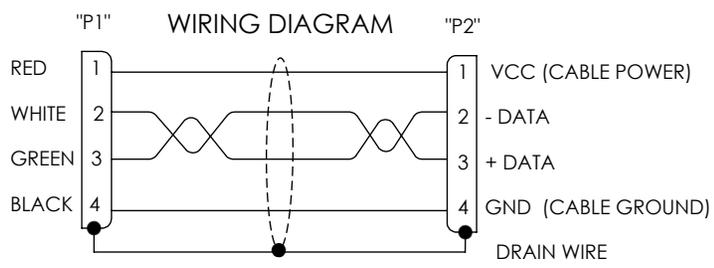

MODEL NUMBER	LENGTH METERS [FEET]
CSMUCLRAB-03M	0.3 [.98]
CSMUCLRAB-05M	0.5 [1.64]
CSMUCLRAB-1M	1.0 [3.28]
CSMUCLRAB-2M	2.0 [6.56]
CSMUCLRAB-3M	3.0 [9.84]
CSMUCLRAB-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. CASTRO	1/10/14		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D. FRISIELLO	1/10/14	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY S. SMITH	1/13/14	CA, USB CLEAR TYPE A/B	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. CSMUCLRAB	REV. <b>A</b>
			SCALE: NONE	CAD FILE: CSMUCLRAB.SLDDRW
				SHEET 1 OF 1