




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

**RoHS Compliant** ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/26/13	D.GRIFFIN



"P1"  
MALE 15 PIN  
D-SUB CONNECTOR

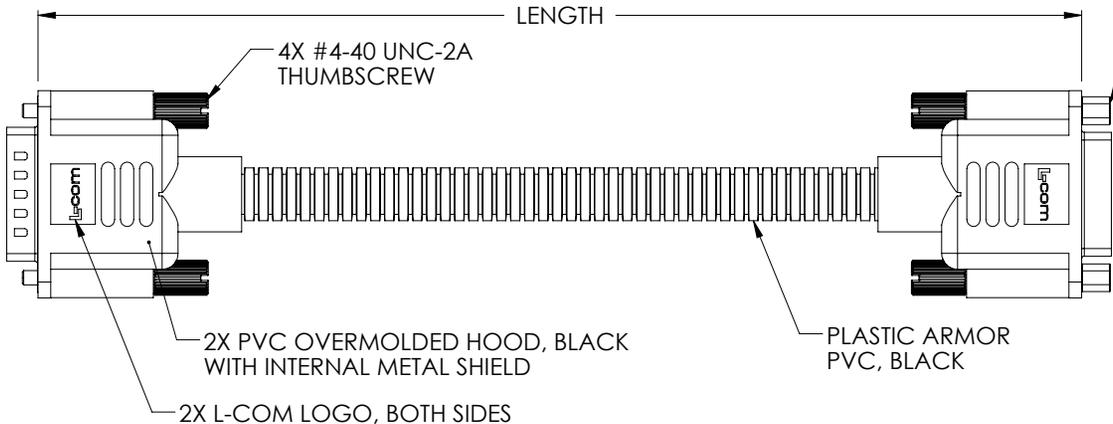

"J1"  
FEMALE 15 PIN  
D-SUB CONNECTOR

2X #4-40 UNC-2B  
HEX STANDOFF

WIRE CHART		
"P1"	COLOR	"J1"
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	VIOLET	8
9	GRAY	9
10	WHITE	10
11	PINK	11
12	LIGHT GREEN	12
13	BLACK/WHITE	13
14	BROWN/WHITE	14
15	RED/WHITE	15
SHELL	DRAIN WIRE	SHELL

PART NUMBER	LENGTH	
	FT	METERS
CSPL15MF-2.5	2.5	0.76
CSPL15MF-5	5.0	1.52
CSPL15MF-10	10.0	3.05
CSPL15MF-15	15.0	4.57
CSPL15MF-25	25.0	7.62
CSPL15MF-50	50.0	15.24

**NOTES:**

- CABLE: UL STYLE 2919, 15 CONDUCTOR (26AWG) (DOUBLE SHIELDED, BRAID & FOIL)  
JACKET: PVC, LIGHT GRAY (PANTONE 400C)
- CABLE SHALL BE TESTED FOR CONTINUITY.
- CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $>12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $>60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $>120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $>300$ [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY D.PARHAM CHECKED BY D.DESJARDIN APPROVED BY S.SMITH	DATE 05/04/2011 01/04/2013 01/04/2013	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY D-SUBMINIATURE
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
	DWG. NO. CSPL15MF		SCALE: NONE	CAD FILE: CSPL15MF.SLDDRW
SHEET 1 OF 1		REV. <b>A</b>		