


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3425: CN RELEASE	6/30/08	D.CASTRO
F	ECN 3450: DELETED HEX SCREW DIMS	8/6/08	D.CASTRO
G	ECN 6807: REVISED L-COM LOGO'S, NEW FORMAT, REVISED PACKAGING	4/19/13	D.FRISIELLO

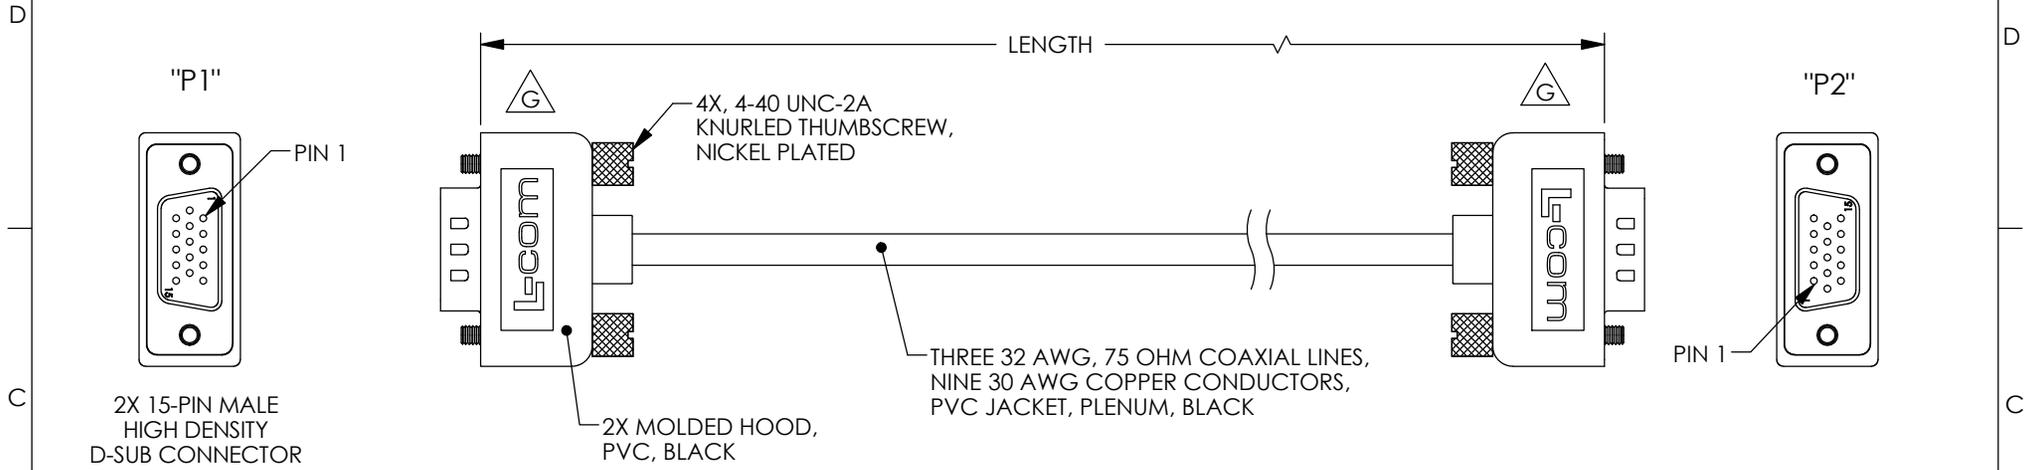

**NOTES:**


CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.

CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

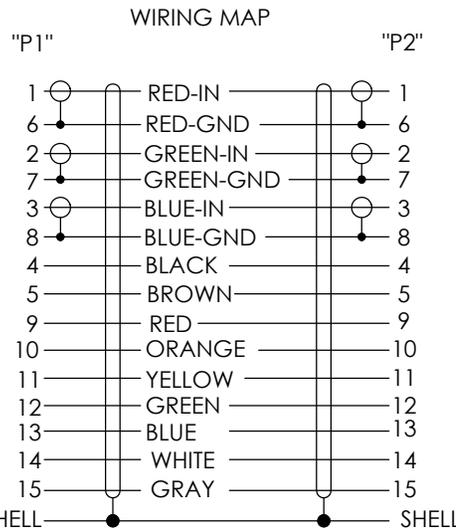

MODEL NUMBER	LENGTH FEET [METERS]
CTL3VGAMM-5TP	5.0 [1.52]
CTL3VGAMM-10TP	10.0 [3.05]
CTL3VGAMM-15TP	15.0 [4.57]
CTL3VGAMM-25TP	25.0 [7.62]
CTL3VGAMM-50TP	50.0 [15.24]

**MOUNTING HARDWARE DETAIL**

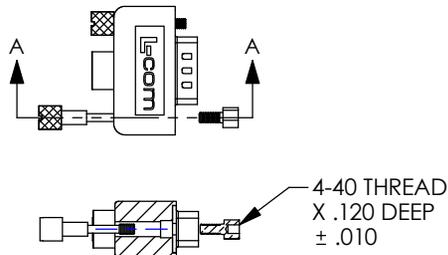

SECTION A-A  
SCALE: 1:2

CABLES ARE SHIPPED WITH THUMBSCREWS INSTALLED AND FOUR HEX SCREW LOCKS FOR OPTIONAL USE. THUMBSCREWS MAY BE REMOVED EASILY AND THE HEX SCREW LOCKS MOUNTED IN THE CAPTIVE NUTS OF THE CONNECTOR.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%  ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY D. PARHAM CHECKED BY C. MCCORMICK APPROVED BY R. CARRICK	DATE 01/07/2003 01/08/2003 01/10/2003	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY  COLOR VARIATIONS MAY OCCUR	CATEGORY <b>AUDIO/VIDEO</b>  PRODUCT DESCRIPTION <b>THIN-LINE PLENUM VIDEO CABLE ASSEMBLY M/M</b>		
PROJECTION 	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CTL3VGAMM-TP</b>	REV. <b>G</b>
SCALE: NONE		CAD FILE: CTL3VGAMM-TP.SLDRW		SHEET 1 OF 1