


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4426: CN RELEASE	12/4/09	Bill_Zhang
F	ECN 5632: ADDED 50 FT LENGTH. UPDATED PACKAGING NOTE.	07/25/11	DFP

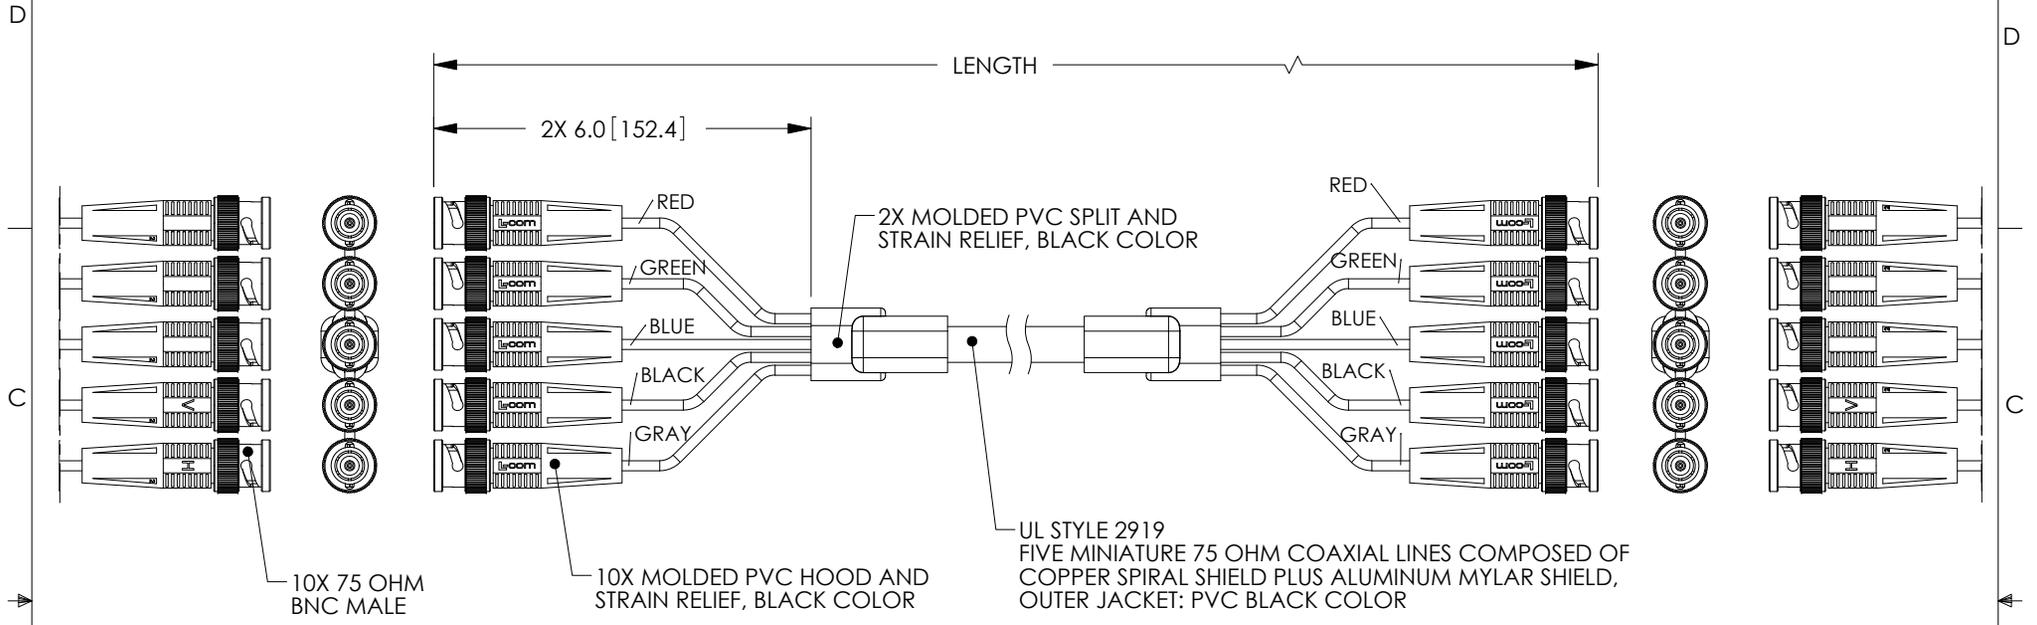


10X 75 OHM BNC MALE

10X MOLDED PVC HOOD AND STRAIN RELIEF, BLACK COLOR

2X MOLDED PVC SPLIT AND STRAIN RELIEF, BLACK COLOR

UL STYLE 2919 FIVE MINIATURE 75 OHM COAXIAL LINES COMPOSED OF COPPER SPIRAL SHIELD PLUS ALUMINUM MYLAR SHIELD, OUTER JACKET: PVC BLACK COLOR

MODEL NUMBER	LENGTH	
	FEET	METERS
CTL5B-5B	5.0	1.52
CTL5B-7.5B	7.5	2.28
CTL5B-10B	10.0	3.05
CTL5B-15B	15.0	4.57
CTL5B-25B	25.0	7.62
CTL5B-50B	50.0	15.24

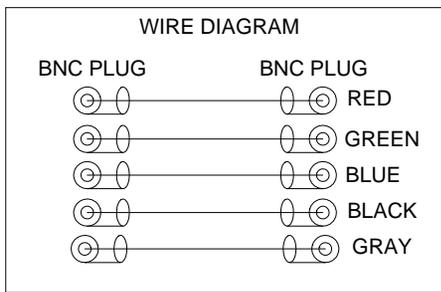

NOTES:  
 1. CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.  
 2. CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY Bill_Zhang	12/04-09	
ALL OTHER DIMENSIONAL TOLERANCES: .X ± .2 .XX ± .02 .XXX ± .005	CHECKED BY Frank_Mao	12/04-09	PRODUCT DESCRIPTION <b>CA RGB 5 COAX BNC M/M</b>
PROJECTION 	APPROVED BY Thomas_Lu	12/04-09	
SIZE <b>A</b>		FSCM NO. <b>43321</b>	DWG. NO. <b>CTL5B-5B</b>
SCALE: NONE		CAD FILE: CTL5B-5B.SLDDRW	SHEET 1 OF 1