


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

**RoHS Compliant** ✓

| REVISIONS |  |          |              |
|-----------|--|----------|--------------|
| REV       | DESCRIPTION                                    | DATE     | APPROVED     |
| C         | ECN 3791: CN RELEASE                           | 1/12/09  | D.CASTRO     |
| D         | ECN 6519: UPDATED FORMAT, PACKAGING, AND LOGOS | 11/19/12 | D. DESJARDIN |
| E         | ECN6725: REVISED DIMENSION 1.00 TO 1.0         | 03/12/13 | B.ZHANG      |

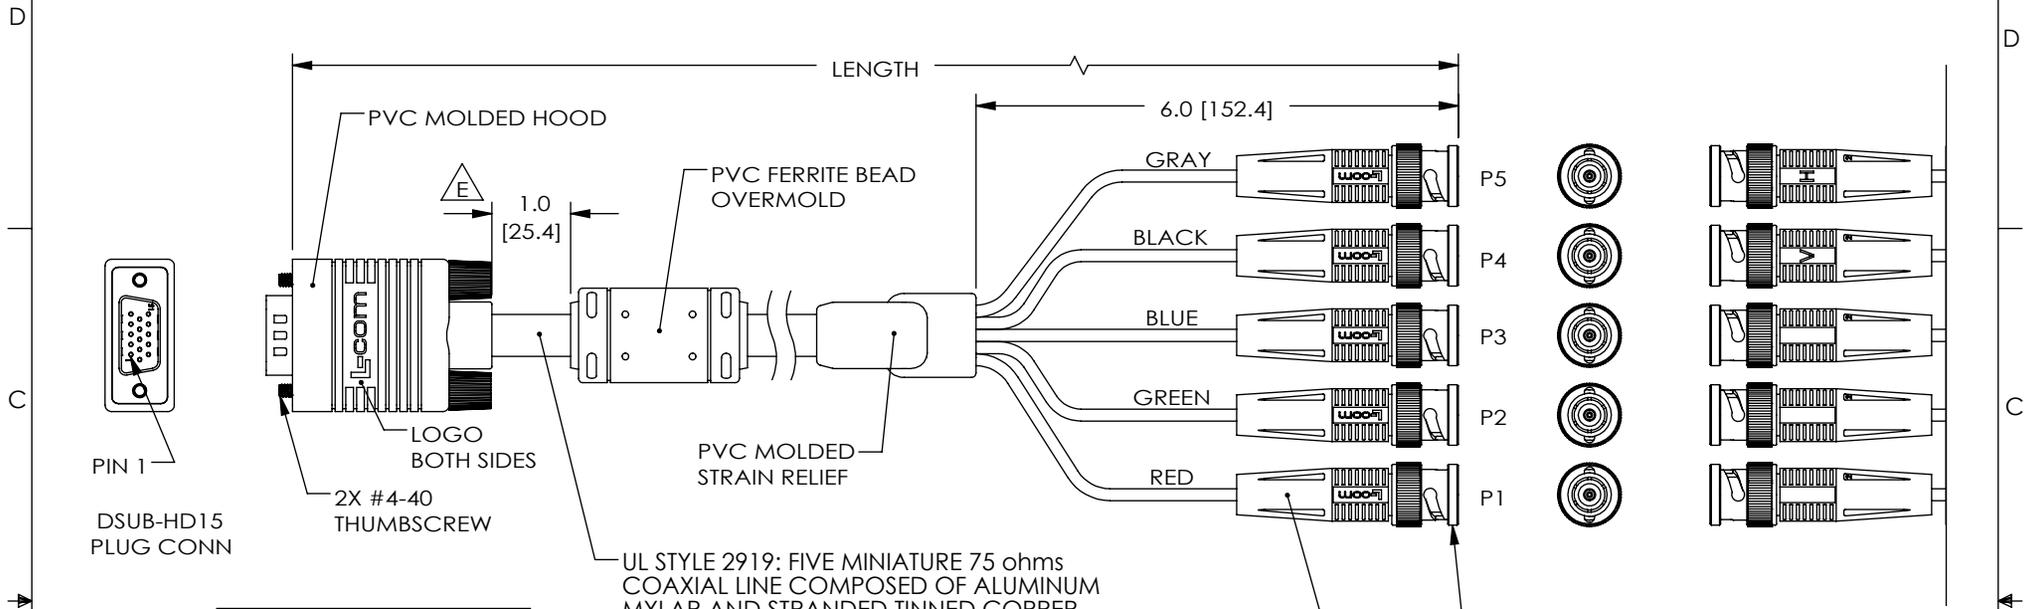

DSUB-HD15  
PLUG CONN

| WIRE MAP  |          |
|-----------|----------|
| HD15 PLUG | BNC PLUG |
| PIN 1     | P1       |
| PIN 2     | P2       |
| PIN 3     | P3       |
| PIN 4     | N/C      |
| PIN 5     | SHIELD   |
| PIN 6     | SHIELD   |
| PIN 7     | SHIELD   |
| PIN 8     | SHIELD   |
| PIN 9     | N/C      |
| PIN 10    | SHIELD   |
| PIN 11    | N/C      |
| PIN 12    | N/C      |
| PIN 13    | P5       |
| PIN 14    | P4       |
| PIN 15    | N/C      |
| SHELL     | SHIELD   |

UL STYLE 2919: FIVE MINIATURE 75 ohms COAXIAL LINE COMPOSED OF ALUMINUM MYLAR AND STRANDED TINNED COPPER BRAIDED SHIELD.

| MODEL NUMBER | LENGTH |       | COLOR:<br>CABLE JACKET, MOLDED HOOD,<br>MOLDED STRAIN RELIEFS,<br>FERRITE OVERMOLD |
|--------------|--------|-------|--|
|              | FEET   | METER |  |
| CTL5CAT-6F   | 6.0    | 1.83  | GRAY (424C)  |
| CTL5CAT-6BF  | 6.0    | 1.83  | BLACK  |

NOTES: ALL BNC SHIELDS TIED TO SHELL

- CABLE SHALL BE TESTED FOR CONTINUITY.
- CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

|   |  |                            |  |  |
|---|--|----------------------------|--|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]<br>OVERALL CABLE LENGTH TOLERANCE:<br>≤12 [305] = +1 [25] / -0<br>>12 [305] ≤60 [1524] = +2 [51] / -0<br>>60 [1524] ≤120 [3048] = +4 [102] / -0<br>>120 [3048] ≤300 [7620] = +6 [152] / -0<br>>300 [7620] = +3% / -0% | APPROVALS  | DATE                       |  | 45 BEECHWOOD DRIVE<br>NORTH ANDOVER, MA<br>01845 |
|   | DRAWN BY<br>BILL_ZHANG                                   | 10/20/08                   |  |  |
| ALL OTHER DIMENSIONAL TOLERANCES:<br>.X = ±.2<br>.XX = ±.02<br>.XXX = ±.005   | CHECKED BY<br>FRANK_MAO                                  | 10/20/08                   | CATEGORY<br>AUDIO/VIDEO                          |  |
|   | APPROVED BY<br>THOMAS_LU                                 | 10/20/08                   | PRODUCT DESCRIPTION<br>CA VGA BKT HD15 M/5 BNC M |  |
| PROJECTION<br>  | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | COLOR VARIATIONS MAY OCCUR | SIZE<br><b>A</b>                                 | FSCM NO.<br><b>43321</b>                         |
|   |  |                            | DWG. NO.<br>CTL5CAT-6F                           | REV.<br><b>E</b>                                 |
|   |  |                            | SCALE: NONE                                      | CAD FILE: CTL5CAT-6F.SLDDRW                      |
|   |  |                            |  | SHEET 1 OF 1                                     |