
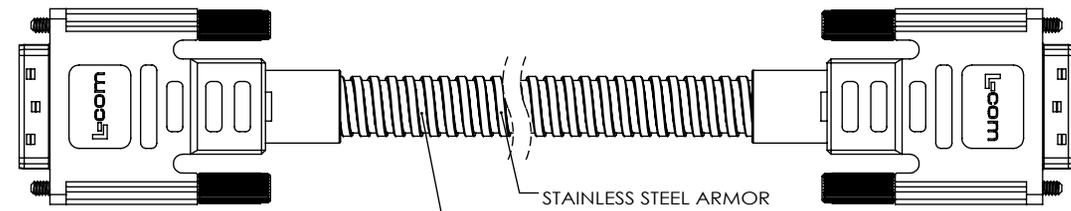



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CN INITIAL RELEASE	07/10/2013	B.Zhang
B	ECN8182: UPDT DWG FROM MOLDED THUMBSCREW TO METAL THUMBSCREW	11/28/2015	B.ZHANG

MODEL NUMBER	LENGTH	
	FEET	METERS
CTLDVIMT-3	3.0	[.92]
CTLDVIMT-5	5.0	[1.52]
CTLDVIMT-10	10.0	[3.05]
CTLDVIMT-15	15.0	[4.57]

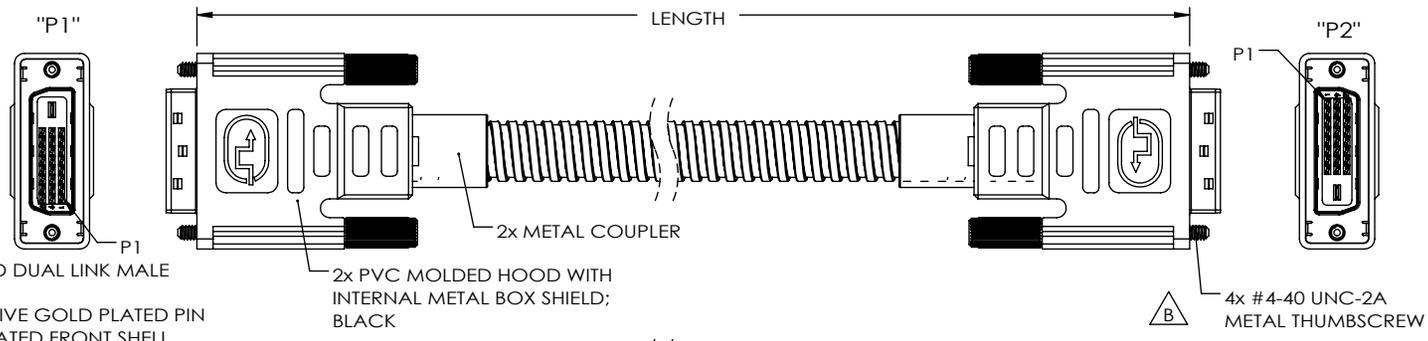

UL STYLE 20276 CABLE (INNER, NOT SHOWN)
 (7) SHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
 (1) UNSHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
 (3) CONDUCTORS, 28AWG, STRANDED TINNED COPPER,
 SHIELDING (BRAIDED): 36AWG TINNED COPPER
 SHIELDING: ALUMINUM/POLYESTER
 OUTER JACKET: PVC; GRAY COLOR (PANTONE 424C)

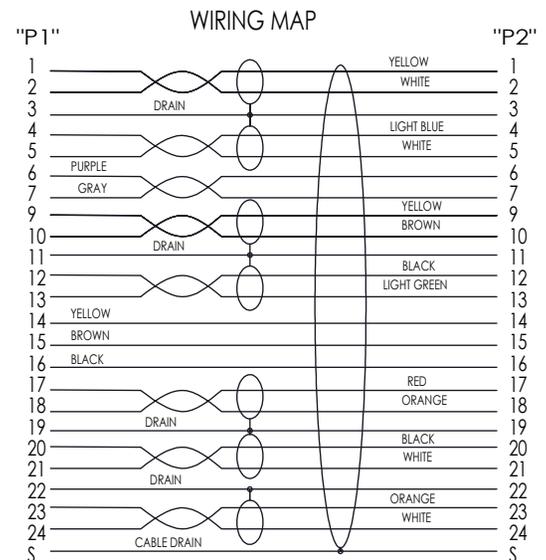

PIN 8: NO CONNECTION

- NOTES**
1. METAL ARMOR CRUSH RESISTANCE: 1500PSI (MIN).
 2. CABLES TO BE TESTED FOR CONTINUITY.
 3. CABLES TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.
 4. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	APPROVALS DRAWN BY B.Zhang CHECKED BY F.MAO APPROVED BY T.LU	DATE 02/22/2013 07/10/2013 07/10/2013	Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY AUDIO/AUDIO/VIDEO
	COLOR VARIATIONS MAY OCCUR			PRODUCT DESCRIPTION CBL,DVI-DDL M/M W/METAL ARMOR
	PROJECTION 	SIZE A		FSCM NO. 43321
REF	SCALE: NONE		CAD FILE: CTLDVIMT.SLDDRW SHEET 1 OF 1	