







THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|---|---------|-------------|
| REV | DESCRIPTION | DATE | CHANGED BY |
| F | ECN 99999: UPDATED DRAWING AND NEW FORMAT | 2/8/10 | D.FRISIELLO |
| G | ECN 5937: ADDED NOTE FOR PANEL MOUNTING | 1/23/12 | D.FRISIELLO |

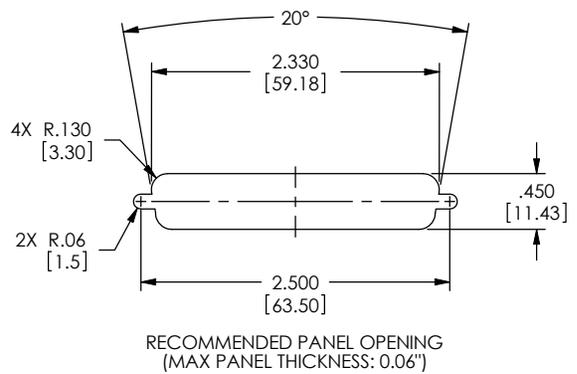

RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")

NOTE: DIFFERENT STANDOFFS AND JACK SCREWS ARE REQUIRED FOR PANEL MOUNTING. SEE WWW.L-COM.COM OR MASTER CATALOG FOR DETAILS.

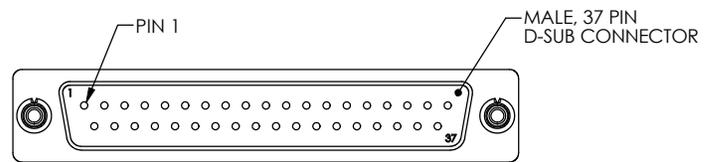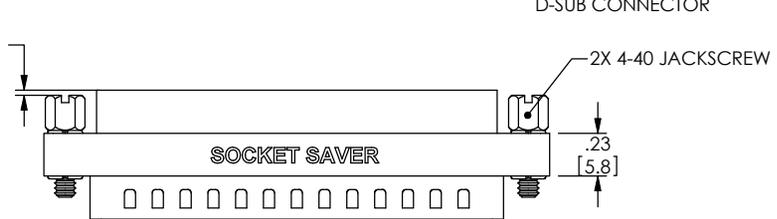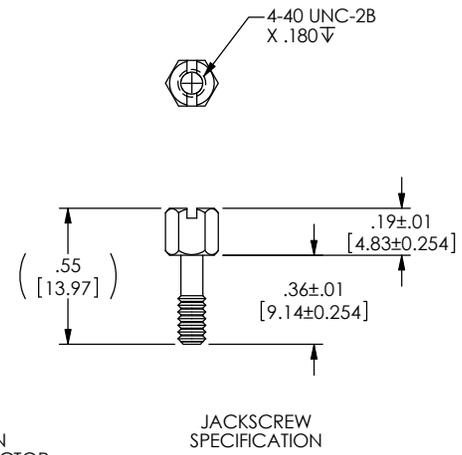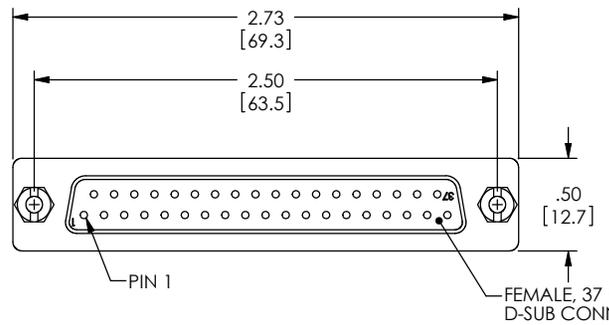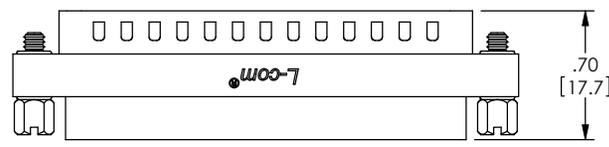

NOTES:
 MATERIAL:
 SHELL: STEEL
 CONTACTS: COPPER ALLOY
 HARDWARE: BRASS
 INSULATOR: PBT FIBER REINFORCED (UL94V-0 RATED)
 FINISH:
 SHELL: TIN/NICKEL PLATED
 CONTACTS: GOLD FLASH PLATED, 1-5µ INCHES
 HARDWARE: NICKEL PLATED
 ELECTRICAL:
 CURRENT RATING: 3 AMP
 INSULATION RESISTANCE: 1000 MΩ MIN @500 VDC
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC (FOR ONE MINUTE)
 MISCELLANEOUS:
 OPERATING TEMPERATURE RANGE: -55°C TO +105°C.
 ALL CONTACTS WIRED STRAIGHT THROUGH.
 COMPONENT SHALL BE TESTED FOR CONTINUITY.

LABELING:
 PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.
 "SOCKET SAVER" FONT ARIAL BOLD, TEXT HEIGHTS; .085"
 TEXT COLOR; WHITE.

PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✓

| | | |
|---|---|------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm) | APPROVALS | DATE |
| DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 | DRAWN BY R.CARRICK | 09/28/2002 |
| ANGULAR TOLERANCES: ALL = ±1° | CHECKED BY T.CLARK | 09/28/2002 |
| PROJECTION | APPROVED BY D.PARHAM | 09/28/02 |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | |
| | COLOR VARIATIONS MAY OCCUR | |

| | | | |
|---|------------------------|--|----------------|
| | | 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 | |
| CATEGORY: D-SUBMINIATURE | | | |
| PRODUCT DESCRIPTION: SOCKET SAVER, DB37 MALE/FEMALE | | | |
| SIZE: B | PSCM NO.: 43321 | DWG. NO.: DGB37MF | REV.: G |
| SCALE: 2:1 | | CAD FILE: DGB37MF.SLDDRW | |
| | | | SHEET 1 OF 1 |