

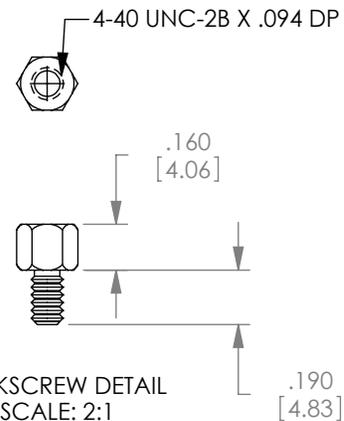




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS |   |          |             |
|-----------|---|----------|-------------|
| REV       | DESCRIPTION                                     | DATE     | APPROVED    |
| A         | INITIAL RELEASE                                 | 5/10/04  | DFP         |
| B         | ECN 4308: ADDED VOLTAGE, AMPS & PACKAGING NOTES | 10/12/09 | D.FRISIELLO |
| C         | ECN 5463: ADDED PANEL CUTOUT,UPDATED FORMAT     | 4/26/11  | D. CASTRO   |

| WIRING TABLE |                  |
|--------------|------------------|
| DB9 PIN #    | TERMINAL BLOCK # |
| 1            | 1                |
| 2            | 2                |
| 3            | 3                |
| 4            | 4                |
| 5            | 5                |
| 6            | 6                |
| 7            | 7                |
| 8            | 8                |
| 9            | 9                |
| SHELL        | SHL              |

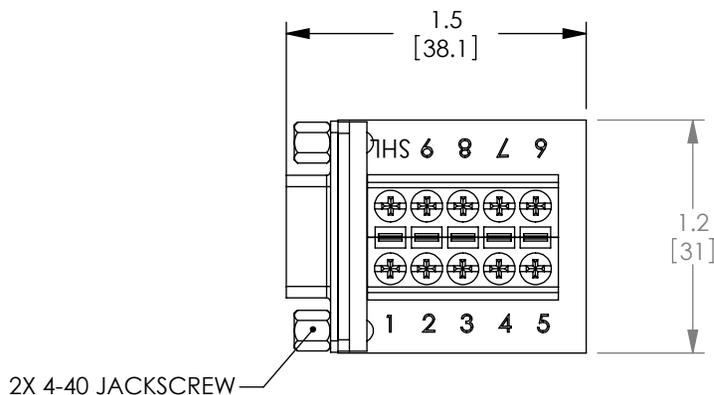

FEMALE, 9 CONTACT D-SUB CONNECTOR

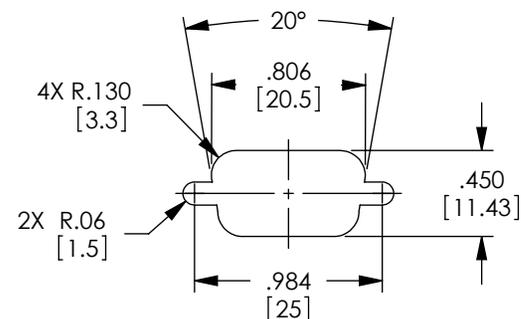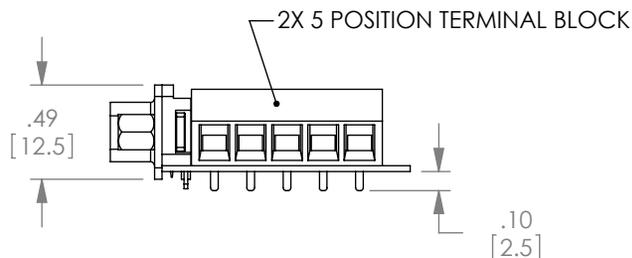

RECOMMENDED PANEL OPENING (MAX PANEL THICKNESS: 0.06")



**RoHS Compliant** ✓

NOTES:

VOLTAGE RATING: 1000V AC & 500V DC.  
CURRENT RATING: 3 AMPS

COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

|   |  |                            |  |
|---|--|----------------------------|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]<br>OVERALL CABLE LENGTH TOLERANCE:<br>≤12 [305] = +1 [25] / -0<br>>12 [305] ≤60 [1524] = +2 [51] / -0<br>>60 [1524] ≤120 [3048] = +4 [102] / -0<br>>120 [3048] ≤300 [7620] = +6 [152] / -0<br>>300 [7620] = +3% / -0% | APPROVALS  | DATE                       | <b>L-com</b> Global Connectivity<br>45 BEECHWOOD DRIVE<br>NORTH ANDOVER, MA<br>01845 |
|   | DRAWN BY<br>D. PARHAM                                    | 4/28/2004                  |  |
| ALL OTHER DIMENSIONAL TOLERANCES:<br>.X = ±.2<br>.XX = ±.02<br>.XXX = ±.005   | CHECKED BY<br>T. CLARK                                   | 4/29/2004                  | CATEGORY<br>DATA   |
|   | APPROVED BY<br>C. McCORMICK                              | 5/7/2004                   | PRODUCT DESCRIPTION<br>FIELD INSTALLABLE DB9   |
| PROJECTION<br>  | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | COLOR VARIATIONS MAY OCCUR | SIZE<br><b>A</b>   |
|   |  |                            | FSCM NO.<br><b>43321</b>   |
|   |  |                            | DWG. NO.<br>DGB9FT   |
|   |  |                            | REV.<br><b>C</b>   |
|   |  |                            | SCALE: NONE  |
|   |  |                            | CAD FILE: DGB9FT.SLDDRW  |
|   |  |                            | SHEET 1 OF 1   |