





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS |  |         |             |
|-----------|--|---------|-------------|
| REV       | DESCRIPTION  | DATE    | CHANGED BY  |
| F         | ECN 4564- ADDED ROHS, UPDATED DRAWING AND NEW FORMAT | 2/17/10 | D.FRISIELLO |
| G         |  |         |             |
| H         | ECN 5937- ADDED NOTE FOR PANEL MOUNTING              | 1/25/12 | D.FRISIELLO |

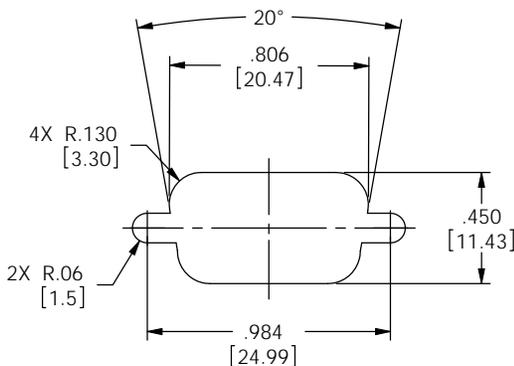

RECOMMENDED PANEL OPENING  
(MAX PANEL THICKNESS: 0.06")

**NOTE: DIFFERENT STANDOFFS AND JACK SCREWS ARE REQUIRED FOR PANEL MOUNTING. SEE WWW.L-COM.COM OR MASTER CATALOG FOR DETAILS.**

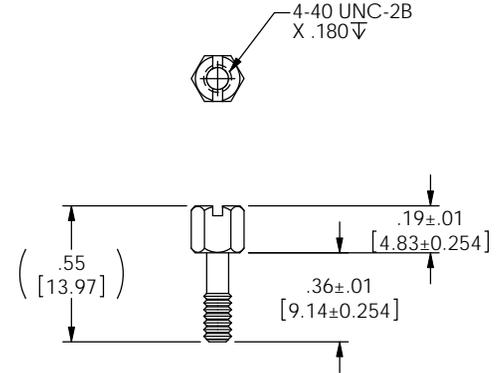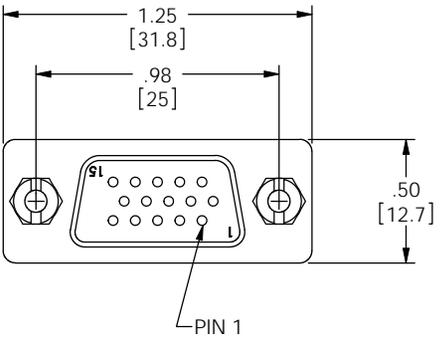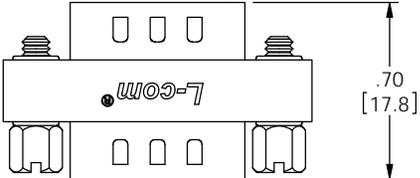

JACKSCREW SPECIFICATION

**NOTES:**  
 MATERIAL:  
 SHELL: STEEL  
 PINS: COPPER ALLOY  
 HARDWARE: BRASS  
 INSULATOR: PBT FIBER REINFORCED (UL94V-0 RATED)



**FINISH:**  
 SHELL: TIN/NICKEL PLATED  
 PINS: GOLD FLASH PLATED  
 HARDWARE: NICKEL PLATED

**ELECTRICAL:**  
 CURRENT RATING: 3 AMP

**MISCELLANEOUS:**  
 OPERATING TEMPERATURE RANGE: -55°C TO +105°C.  
 ALL PINS ARE WIRED STRAIGHT THROUGH.  
 COMPONENT SHALL BE TESTED FOR CONTINUITY.

**LABELING:**  
 PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.  
 "GENDER CHANGER" FONT ARIAL BOLD, TEXT HEIGHTS: .085"  
 TEXT COLOR: WHITE.

**PACKAGING:**  
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

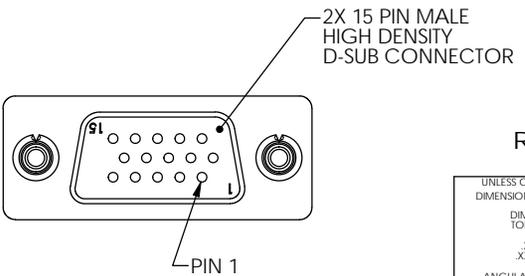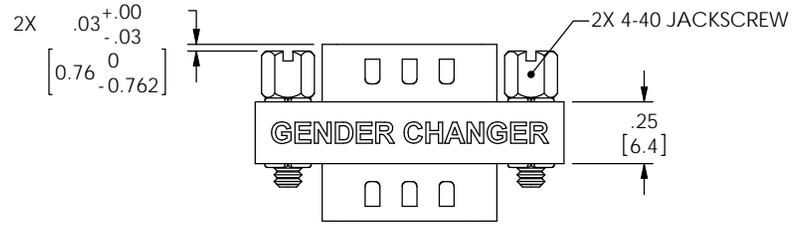

RoHS Compliant ✓

|   |  |            |
|---|--|------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)         | APPROVALS  | DATE       |
|   | DRAWN BY<br>D.PARIAM                                     | 11/08/2001 |
|   | CHECKED BY<br>T.CLARK                                    | 11/08/2001 |
|   | APPROVED BY<br>R.CARRICK                                 | 11/08/2001 |
| DIMENSIONAL TOLERANCES:<br>.X = ±.1<br>.XX = ±.01<br>.XXX = ±.005 | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY |            |
| ANGULAR TOLERANCES:<br>ALL = ± 1°                                 | COLOR VARIATIONS MAY OCCUR                               |            |
| PROJECTION  |  |            |

|   |                        |  |                |
|---|------------------------|--|----------------|
| <b>L-com</b> Global Connectivity                    |                        | 45 BEECHWOOD DRIVE<br>NORTH ANDOVER, MA<br>01845 |                |
| CATEGORY: D-SUBMINIATURE                            |                        |  |                |
| PRODUCT DESCRIPTION: GENDER CHANGER, HD15 MALE/MALE |                        |  |                |
| SIZE: <b>B</b>                                      | PSCM NO.: <b>43321</b> | DWG. NO.: <b>DGBH15M</b>                         | REV.: <b>H</b> |
| SCALE: 2:1  |                        | CAD FILE: DGBH15M.SLDRW                          | SHEET 1 OF 1   |