





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
F	ECN 4564-ADDED ROHS, UPDATED DRAWING AND NEW FORMAT	2/19/10	D.FRISIELLO
G	ECN 5937-ADDED NOTE FOR PANEL MOUNTING	1/25/12	D.FRISIELLO

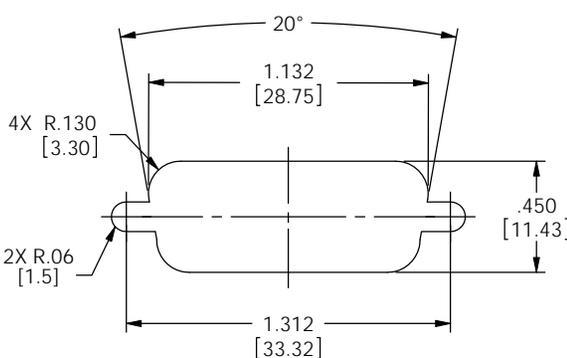



RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")

NOTE: DIFFERENT STANDOFFS AND JACK SCREWS ARE REQUIRED FOR PANEL MOUNTING. SEE WWW.L-COM.COM OR MASTER CATALOG FOR DETAILS.

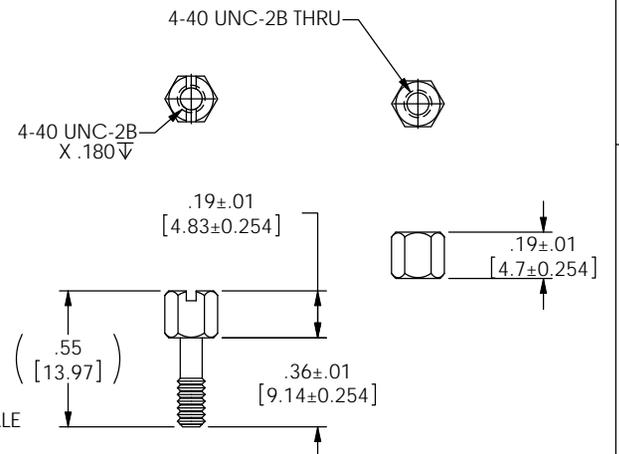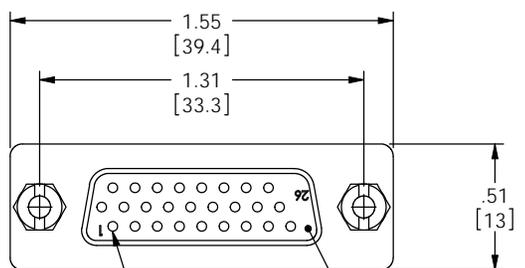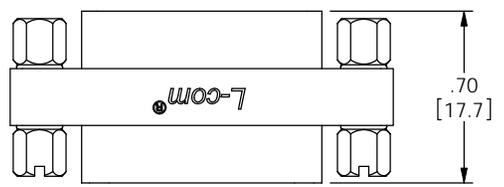

NOTES:
 MATERIAL:
 SHELL: STEEL
 CONTACTS: COPPER ALLOY
 HARDWARE: BRASS
 INSULATOR: PBT FIBER REINFORCED (UL94V-0 RATED)
 FINISH:
 SHELL: TIN/NICKEL PLATED
 CONTACTS: GOLD FLASH PLATED
 HARDWARE: NICKEL PLATED
 ELECTRICAL:
 CURRENT RATING: 3 AMP
 MISCELLANEOUS:
 OPERATING TEMPERATURE RANGE: -55°C TO +105°C.
 ALL CONTACTS ARE WIRED STRAIGHT THROUGH.
 COMPONENT SHALL BE TESTED FOR CONTINUITY.
 LABELING:
 PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.
 "GENDER CHANGER" FONT ARIAL BOLD, TEXT HEIGHTS: .085"
 TEXT COLOR: WHITE.
 PACKAGING:
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

4X .03^{+0.00}_{-.03}
 [0.76⁰_{-0.762}]

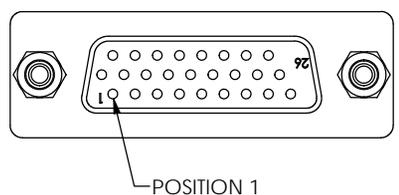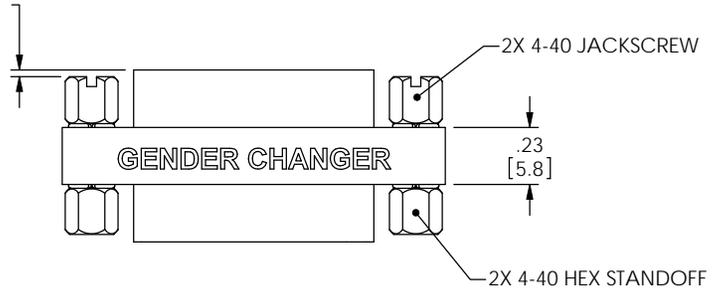

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM)	APPROVALS	DATE
DIMENSIONAL TOLERANCES: X = ±.1 XX = ±.01 XXX = ±.005	DRAWN BY D.PARRIAM	12/18/2001
ANGULAR TOLERANCES: ALL = ± 1°	CHECKED BY T.CLARK	01/16/2002
PROJECTION	APPROVED BY R.CARRICK	01/16/2002
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
	COLOR VARIATIONS MAY OCCUR	

L-com Global Connectivity		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY: D-SUBMINIATURE			
PRODUCT DESCRIPTION: GENDER CHANGER, HD26 FEMALE/FEMALE			
SIZE: B	P/SCM NO.: 43321	DWG. NO.: DGBH26F	REV.: G
SCALE: 2:1		CAD FILE: DGBH26F.SLDRW	SHEET 1 OF 1