




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
F	ECN 4564-ADDED ROHS, UPDATED DRAWING AND NEW FORMAT	3/2/10	D.FRISIELLO
G	ECN 5937-ADDED NOTE FOR PANEL MOUNTING	1/25/12	D.FRISIELLO

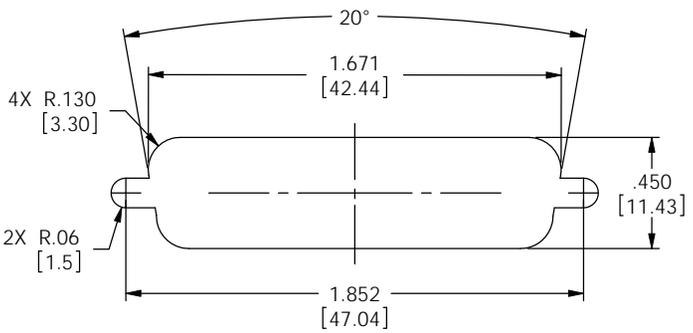


RECOMMENDED PANEL OPENING  
(MAX PANEL THICKNESS: 0.06")

**G** NOTE: DIFFERENT STANDOFFS AND JACK SCREWS ARE REQUIRED FOR PANEL MOUNTING. SEE WWW.L-COM.COM OR MASTER CATALOG FOR DETAILS.

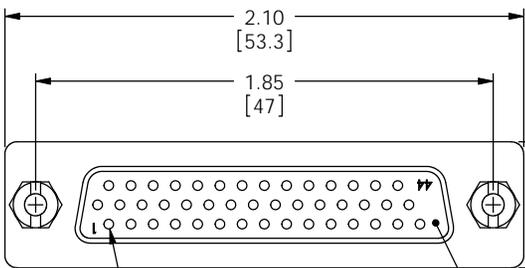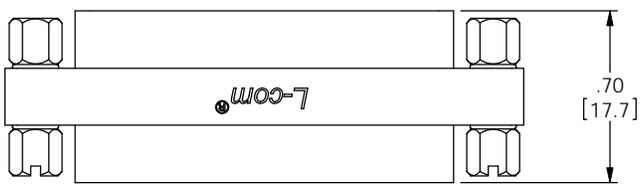


POSITION 1

2X 44 PIN FEMALE HIGH DENSITY D-SUB CONNECTOR

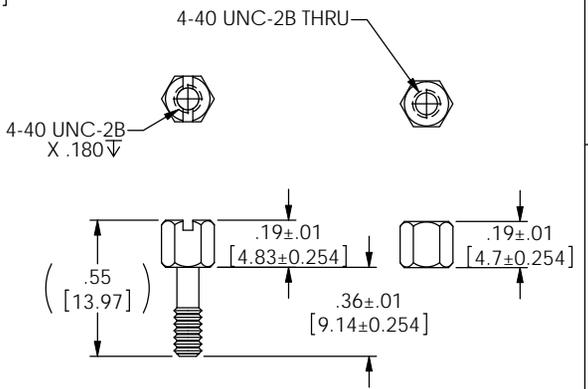


NOTES:  
 MATERIAL:  
 SHELL: STEEL  
 CONTACTS: COPPER ALLOY  
 HARDWARE: BRASS  
 INSULATOR: PBT FIBER REINFORCED (UL94V-0 RATED)  
 FINISH:  
 SHELL: TIN/NICKEL PLATED  
 CONTACTS: GOLD FLASH PLATED  
 HARDWARE: NICKEL PLATED  
 ELECTRICAL:  
 CURRENT RATING: 3 AMP  
 MISCELLANEOUS:  
 OPERATING TEMPERATURE RANGE: -55°C TO +105°C.  
 ALL CONTACTS ARE WIRED STRAIGHT THROUGH.  
 COMPONENT SHALL BE TESTED FOR CONTINUITY.  
 LABELING:  
 PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.  
 "GENDER CHANGER" FONT ARIAL BOLD, TEXT HEIGHTS; .085"  
 TEXT COLOR; WHITE.  
 PACKAGING:  
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

4X .03<sup>+0.00</sup><sub>-.03</sub>  
 [0.76<sub>0</sub><sup>-0.762</sup>]

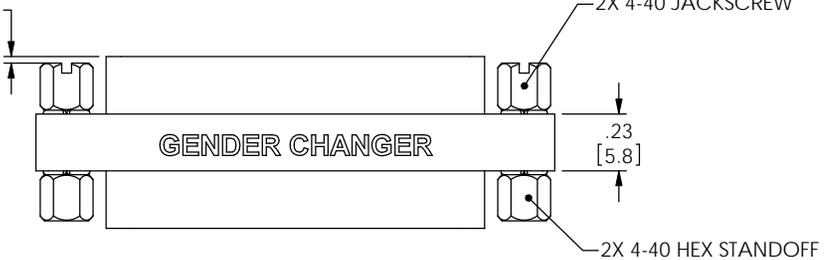

GENDER CHANGER

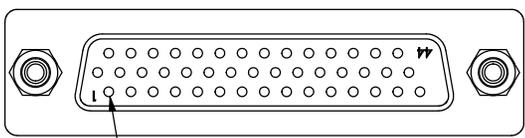

POSITION 1

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM)	APPROVALS	DATE
DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005	DRAWN BY D.PARIAM	03/01/2002
ANGULAR TOLERANCES: ALL = ±1°	CHECKED BY T.CLARK	03/01/2002
PROJECTION	APPROVED BY R.CARRICK	03/01/2002
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
	COLOR VARIATIONS MAY OCCUR	

<b>L-com</b> Global Connectivity		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY D-SUBMINIATURE			
PRODUCT DESCRIPTION GENDER CHANGER, HD44 FEMALE/FEMALE			
SIZE <b>B</b>	PSCM NO. <b>43321</b>	DWG. NO. <b>DGBH44F</b>	REV. <b>G</b>
SCALE: 2:1		CAD FILE: DGBH44F.SLDDRW	SHEET 1 OF 1