





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
F	ECN 4564-ADDED ROHS, UPDATED DRAWING AND NEW FORMAT	3/3/10	D.FRISIELLO
G	ECN 5937-ADDED NOISE FOR PANEL MOUNTING	1/25/12	D.FRISIELLO

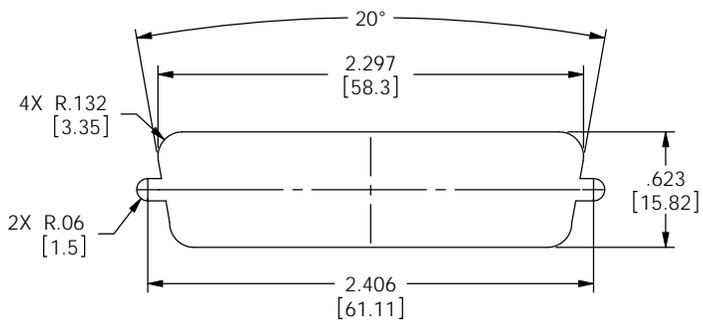

RECOMMENDED PANEL OPENING  
(MAX PANEL THICKNESS: 0.06")

**NOTE: DIFFERENT STANDOFFS AND JACK SCREWS ARE REQUIRED FOR PANEL MOUNTING. SEE WWW.L-COM.COM OR MASTER CATALOG FOR DETAILS.**

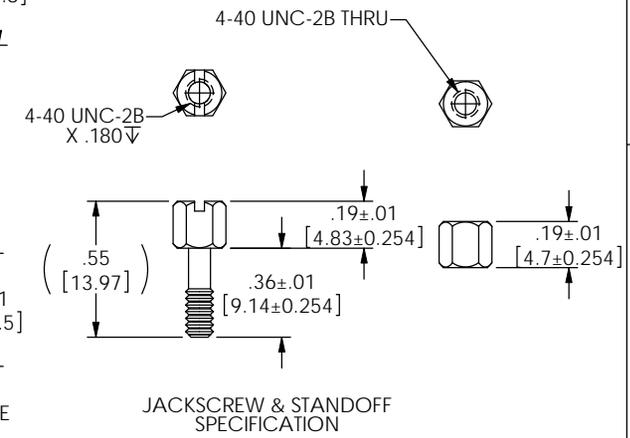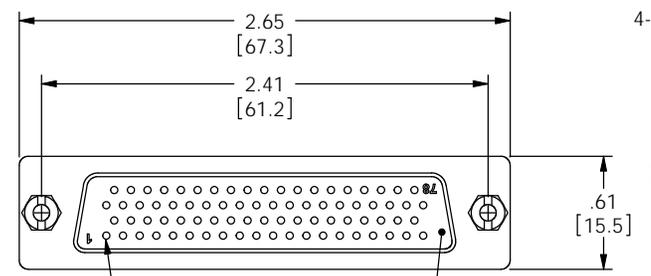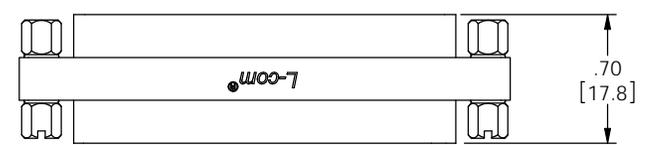

NOTES:

MATERIAL:  
SHELL: STEEL  
CONTACTS: COPPER ALLOY  
HARDWARE: BRASS  
INSULATOR: PBT FIBER REINFORCED (UL94V-0 RATED)

FINISH:  
SHELL: TIN/NICKEL PLATED  
CONTACTS: GOLD FLASH PLATED  
HARDWARE: NICKEL PLATED



ELECTRICAL:  
CURRENT RATING: 3 AMP

MISCELLANEOUS:  
OPERATING TEMPERATURE RANGE: -55 °C TO +105 °C.  
ALL CONTACTS ARE WIRED STRAIGHT THROUGH.  
COMPONENT SHALL BE TESTED FOR CONTINUITY.

LABELING:  
PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.  
"GENDER CHANGER" FONT ARIAL BOLD, TEXT HEIGHTS: .085"  
TEXT COLOR: WHITE.

PACKAGING:  
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

4X .03<sup>+.00</sup><sub>-.03</sub>  
[0.76<sub>0</sub>-0.762]

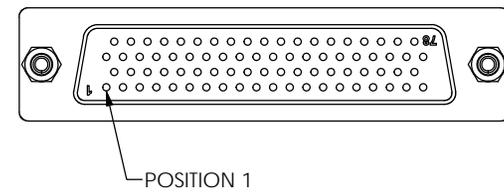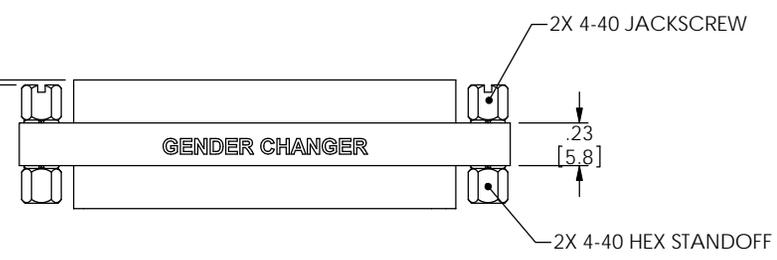

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	APPROVALS	DATE
	DRAWN BY D.PARIAM	03/01/2002
	CHECKED BY T.CLARK	03/01/2002
	APPROVED BY R.CARRICK	03/01/2002
DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
ANGULAR TOLERANCES: ALL = ± 1°	COLOR VARIATIONS MAY OCCUR	
PROJECTION		

<b>L-com</b> Global Connectivity		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY: D-SUBMINIATURE			
PRODUCT DESCRIPTION: GENDER CHANGER, HD78 FEMALE/FEMALE			
SIZE: <b>B</b>	PSCM NO.: <b>43321</b>	DWG. NO.: <b>DGBH78F</b>	REV.: <b>G</b>
SCALE: 2:1		CAD FILE: DGBH78F.SLDDRW	
			SHEET 1 OF 1