

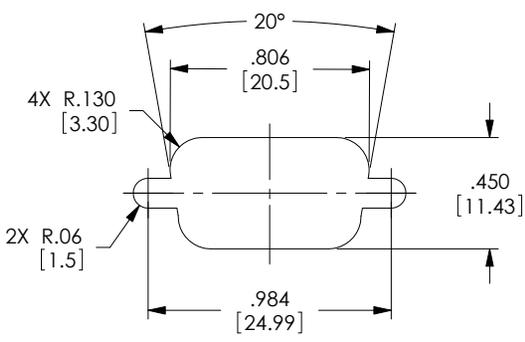
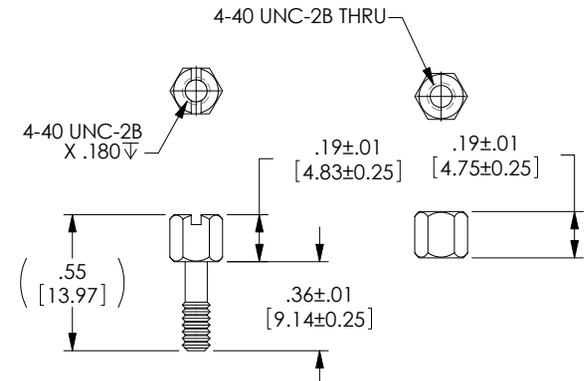


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	DRAWING REPLACES DGBV15F-OD1	9/23/14	D.FRISIELLO

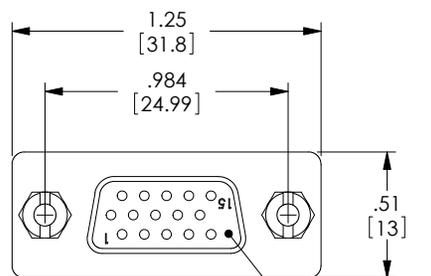

RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")

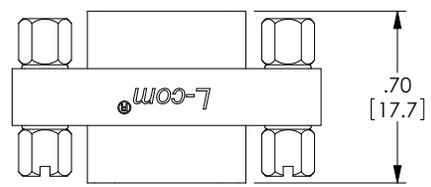

JACKSCREW & HEX STANDOFF SPECIFICATION



- NOTES:**
- MATERIAL:
 - SHELL: STEEL
 - CONTACTS: COPPER ALLOY
 - HARDWARE: BRASS
 - INSULATOR: PBT FIBER REINFORCED (UL94V-0 RATED)
 - FINISH:
 - SHELL: TIN/NICKEL PLATED
 - CONTACTS: GOLD FLASH PLATED
 - HARDWARE: NICKEL PLATED
 - ELECTRICAL:
 - CURRENT RATING: 3 AMP
 - MISCELLANEOUS:
 - OPERATING TEMPERATURE RANGE: -55 °C TO +105 °C.
 - PIN 9 IS OMITTED.
 - ALL CONTACTS ARE WIRED STRAIGHT THROUGH.
 - COMPONENT SHALL BE TESTED FOR CONTINUITY.

LABELING:
PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.
"GENDER CHANGER" FONT ARIAL BOLD, TEXT HEIGHTS; .085"
TEXT COLOR; WHITE.

PACKAGING:
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

4X .03^{+.00}_{-.03}
0
[0.69 -0.76]

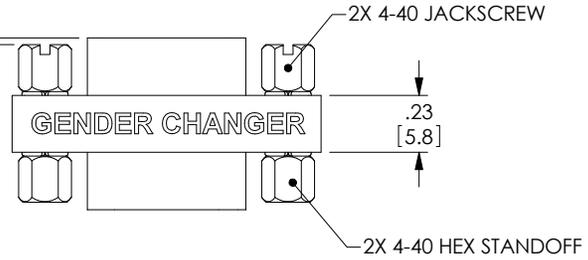

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)
OVERALL CABLE LENGTH TOLERANCE:
≤12 (305) ≤60 (1524) = +.25(1) / -0
>12 (305) ≤120 (3048) = +.4 (102) / -0
>120 (3048) ≤300 (7620) = +.6 (152) / -0
>300 (7620) = +.75 / -0
ALL OTHER DIMENSIONAL TOLERANCES:
X = ±.2 (5.08)
XX = ±.02 (51)
XXX = ±.005 (127)

APPROVALS	DATE
DRAWN BY D.FABRIM	11/12/2001
CHECKED BY T.CLARK	11/12/2001
APPROVED BY R.CARRICK	11/13/2001



CATEGORY D-SUBMINIATURE			
PRODUCT DESCRIPTION ADPT, VGA GNDR CHGR HD15F/F			
SIZE B	FSCM NO. 43321	DWG. NO. DGBV15F	REV. A
SCALE: 2:1	CAD FILE: DGBV15F.SLDDRW	SHEET 1 OF 1	

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

