





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
E	ECN: 7062: CHANGED CONNECTOR NOTE FROM DB9 TO DB15, UPD FORM/PKG	09/16/2013	D.DESJARDIN
F	ECN 11061: REVISED L-COM LOGO	04/01/2021	BGATES

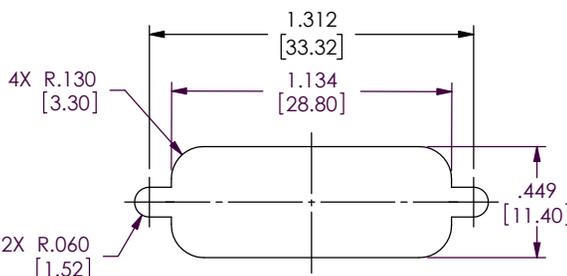


RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")

ALL PINS CONNECTED STRAIGHT THROUGH
FERRITE BLOCK AS SHOWN BELOW:

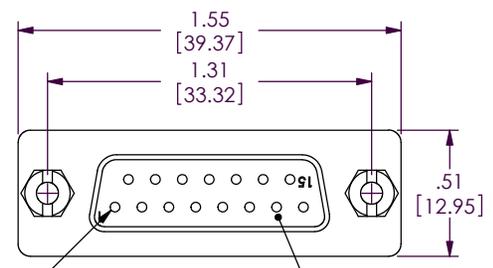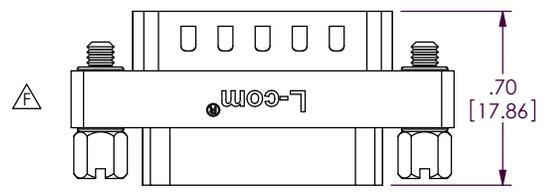

FEMALE, 15 CONTACT
D-SUB CONNECTOR
(J1)



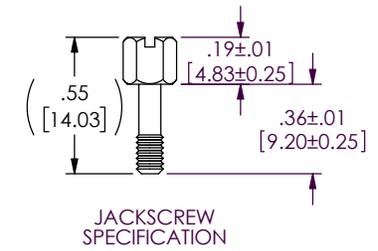


JACKSCREW
SPECIFICATION

- NOTES:**
- MATERIAL:
SHELL: COLD ROLLED STEEL
CONTACTS: BRASS
INSULATOR: PBT (UL 94V-0 RATED)
 - FINISH:
SHELL: TIN PLATED
CONTACT: GOLD FLASH
HARDWARE: NICKEL PLATED
 - ELECTRICAL:
CONTACT CURRENT RATING: 1.0 AMP MAX
VOLTAGE RATING: 150 VAC (MAX)
INSULATION RESISTANCE: 5000 MΩ @ 500 VDC
CONTACT RESISTANCE: 15 mΩ (MAX)
 - MISCELLANEOUS:
OPERATING TEMPERATURE RANGE: -55°C TO 105°C
COMPONENT SHALL BE TESTED FOR CONTINUITY.

LABELING:
PANTONE 2945 BLUE. "L-COM" FONT MyriaMM REGULAR.
"EMI FILTER" FONT ARIAL BOLD, TEXT HEIGHTS: .085"
TEXT COLOR: WHITE.

PACKAGING:
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

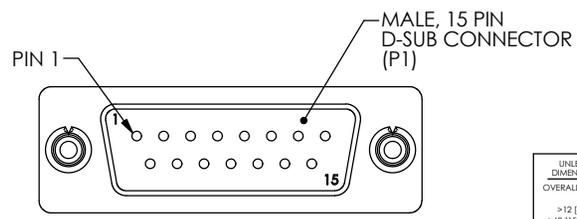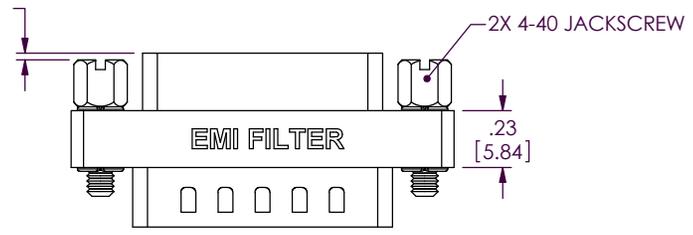

<small>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm).</small> <small>OVERALL CABLE LENGTH TOLERANCE:</small> <small>≤12 [305] = +1 [25] / -0</small> <small>>12 [305] ≤60 [1524] = +2 [51] / -0</small> <small>>60 [1524] ≤120 [3048] = +4 [102] / -0</small> <small>>120 [3048] ≤300 [7620] = +6 [152] / -0</small> <small>>300 [7620] = +5% / -0</small> <small>ALL OTHER DIMENSIONAL TOLERANCES:</small> <small>.X = ±.2 [5]</small> <small>FRACTIONS ± 1/32</small> <small>.XX = ±.02 [0.5]</small> <small>± 1/32</small> <small>.XXX = ±.005 [0.13]</small> <small>ANGLES ± 1°</small>	APPROVALS	DATE	 <small>50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936</small>									
	DRAWN BY R.CARRICK	09/28/2002		<table border="1"> <tr> <td colspan="2">CATEGORY</td> </tr> <tr> <td colspan="2">D-SUBMINIATURE</td> </tr> <tr> <td colspan="2">PRODUCT DESCRIPTION</td> </tr> <tr> <td colspan="2">ADPT, DB15M/F FERRITE FILTER</td> </tr> </table>	CATEGORY		D-SUBMINIATURE		PRODUCT DESCRIPTION		ADPT, DB15M/F FERRITE FILTER	
	CATEGORY											
	D-SUBMINIATURE											
PRODUCT DESCRIPTION												
ADPT, DB15M/F FERRITE FILTER												
CHECKED BY T.CLAIRE	09/28/2002	<table border="1"> <tr> <td>SIZE</td> <td>CAGE CODE</td> <td>ITEM NO.</td> </tr> <tr> <td>B</td> <td>43321</td> <td>DGF15MF</td> </tr> </table>	SIZE	CAGE CODE	ITEM NO.	B	43321	DGF15MF				
SIZE	CAGE CODE	ITEM NO.										
B	43321	DGF15MF										
APPROVED BY D.PARHAM	09/28/2002	<table border="1"> <tr> <td>SCALE: NONE</td> <td>CAD FILE: DGF15MF.SLDDRW</td> <td>SHEET 1 OF 1</td> </tr> </table>	SCALE: NONE	CAD FILE: DGF15MF.SLDDRW	SHEET 1 OF 1							
SCALE: NONE	CAD FILE: DGF15MF.SLDDRW	SHEET 1 OF 1										