

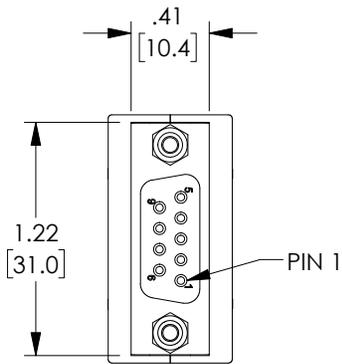
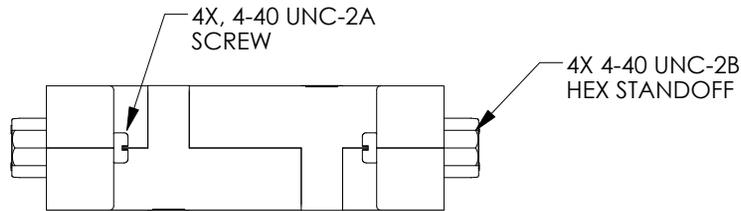


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|---|------------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 07/08/2011 | S.SMITH |
| B | ECN 10590: REVISED 3D MODEL AND DRAWING | 08/06/2020 | BGATES |
| | | | |
| | | | |

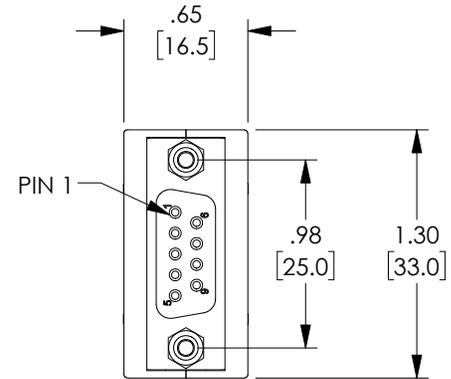


2X DB9 FEMALE CONNECTOR WITH SOLDER CUPS

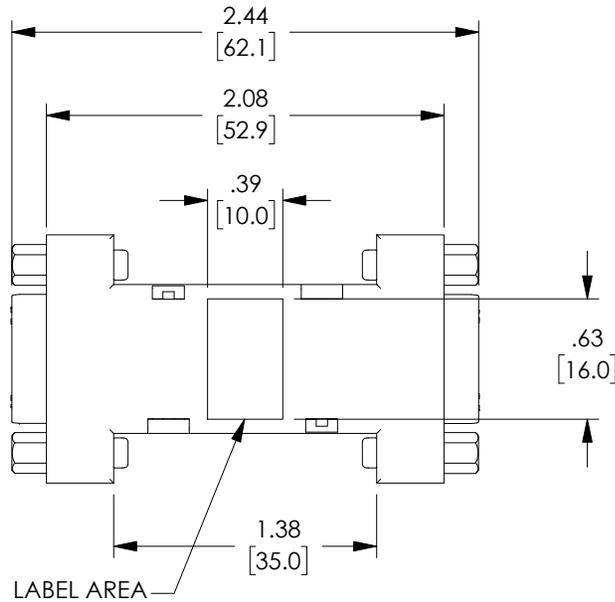

NOTES:

- ENCLOSURE IS ABS PLASTIC COLOR: DARK GRAY.
- COVER HALVES SNAP TOGETHER TO RETAIN CONNECTORS AND CAPTIVE HARDWARE.
- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- COMPONENT ASSEMBLY IS SHIPPED UN-ASSEMBLED.
- JUMPER WIRES ARE SUPPLIED SEPARATELY.
- COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

| | | | | | | |
|--|--|--|---|---|---------------------------|---------------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13] | APPROVALS D.CASTRO CHECKED BY D.PARHAM APPROVED BY S.SMITH | DATE 07/08/2011 07/08/2011 07/08/2011 |  an INFINITI® brand | 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 | | |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR | CATEGORY D-SUBMINIATURE | PRODUCT DESCRIPTION ADPT, KIT UNWIRED DB9F/F | SIZE A | CAGE CODE 43321 | ITEM NO. DIY9FF |
| THIRD-ANGLE PROJECTION  | | SCALE: NONE CAD FILE: DIY9FF.SLDDRW | | SHEET 1 OF 1 | | |