


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/2/17	R.CLARK

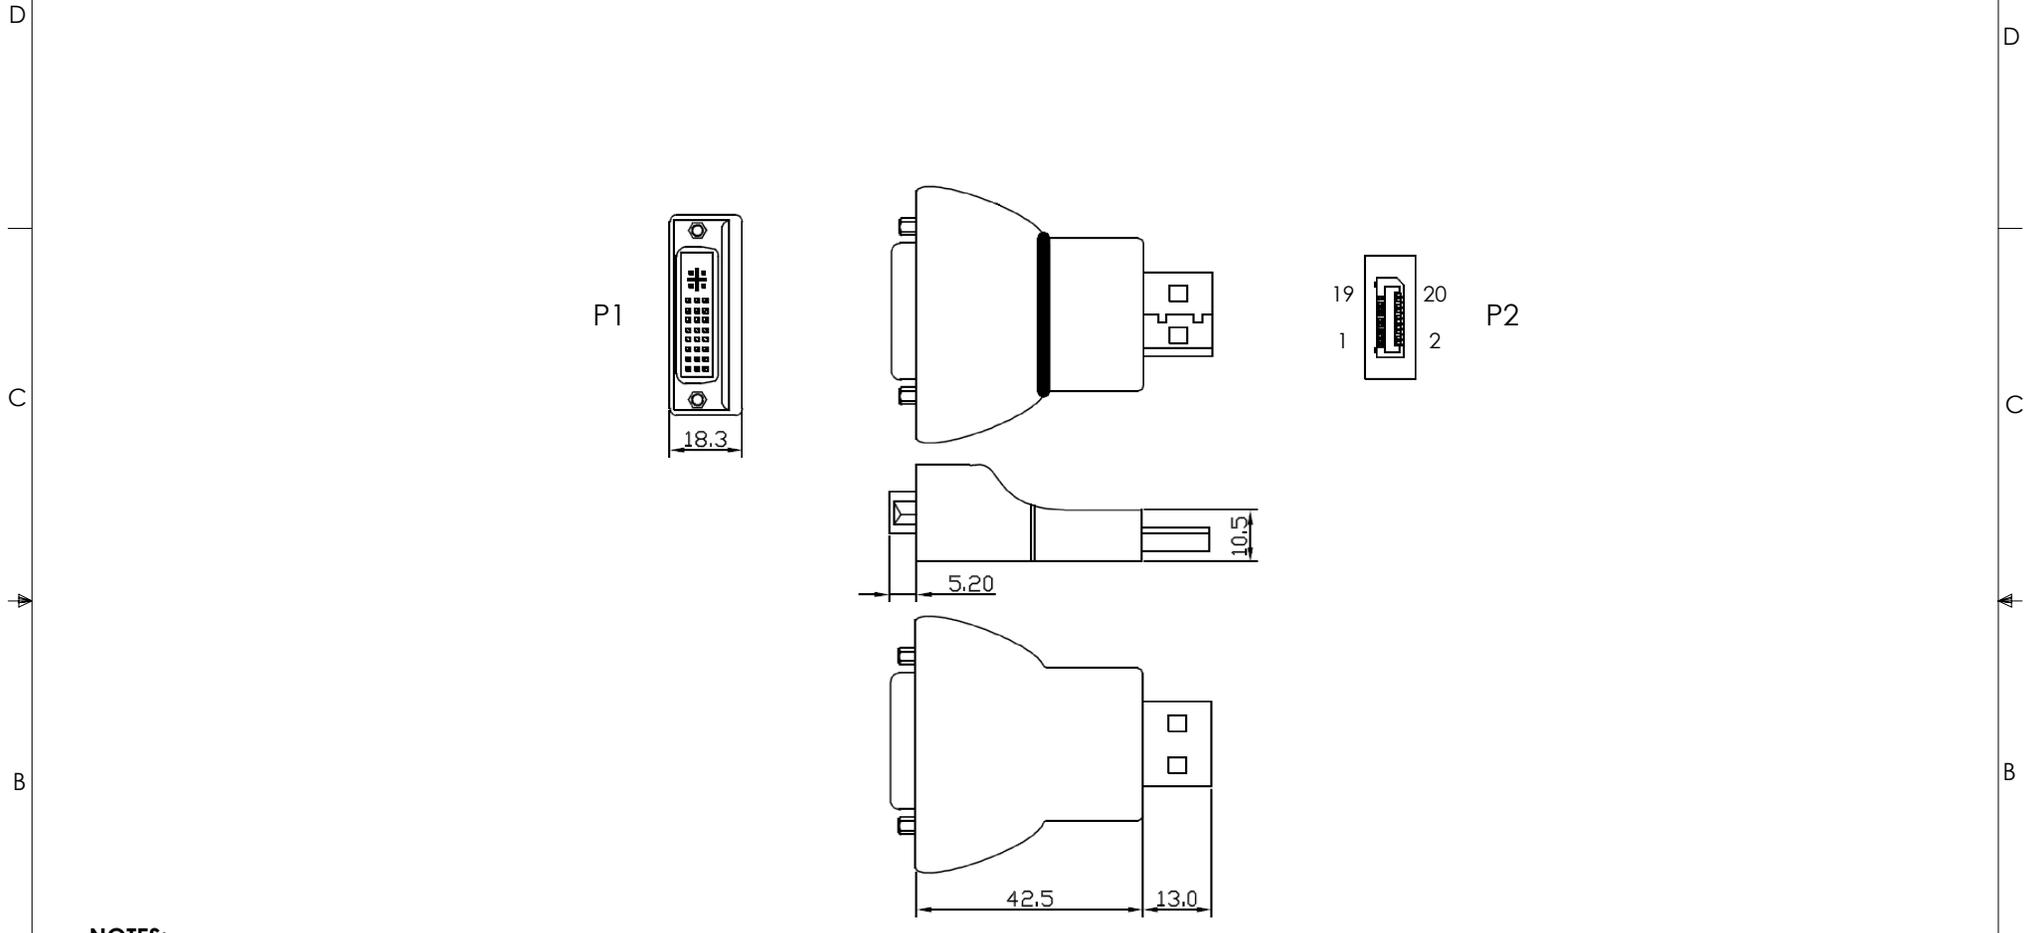

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. VOLTAGE TEST: DC 300V 10ms
INSULATION RESITANCE: 10.0Mohm/MIN.
CONDUCTANCE RESISTANCE: 2.0 ohm/MAX.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
4. ALL DIMENSIONS ARE FOR REFERENCE ONLY AND ARE "mm" UNLESS OTHERWISE SPECIFIED.
5. INSIDE THE MOLDED P2 END MUST USE COPPER FOIL AND SOLDER THE BRAID 360 DEGREES TO THE SHELL.

REGULATORY COMPLIANCE:
CE 2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS DRAWN BY R.CLARK	DATE 6/2/17	50 HIGH STREET NORTH ANDOVER, MA 01845
	CHECKED BY B.GATES APPROVED BY B.GATES	DATE 6/2/17 6/2/17	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION DP M to DVI F ADPTR	SCALE: NONE CAD FILE: DPC0008.SLDDRW
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. DPC00008
SHEET 1 OF 1	REV. A	SHEET 1 OF 1	SHEET 1 OF 1