


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN_8257; CHANGE DVI ICON TO THE RIGHT ORIENTATION	2/18/2016	B.ZHANG

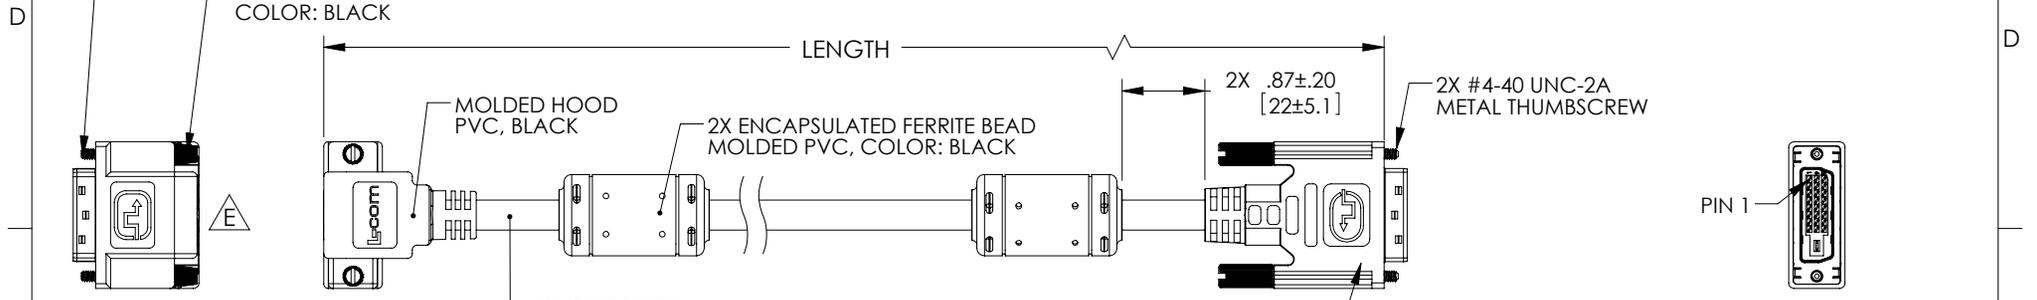

"P1"
MALE DVI-D
DUAL LINK PLUG
RIGHT ANGLE
CONNECTOR

UL STYLE 20276,
(7) SHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
(1) UNSHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
(3) CONDUCTORS, 28AWG, STRANDED TINNED COPPER,
SHIELDING(BRAIDED): 36AWG TINNED COPPER
SHIELDING: ALUMINUM/POLYESTER
OUTER JACKET: PVC, BLACK

"P2"
MALE DVI-D
DUAL LINK PLUG

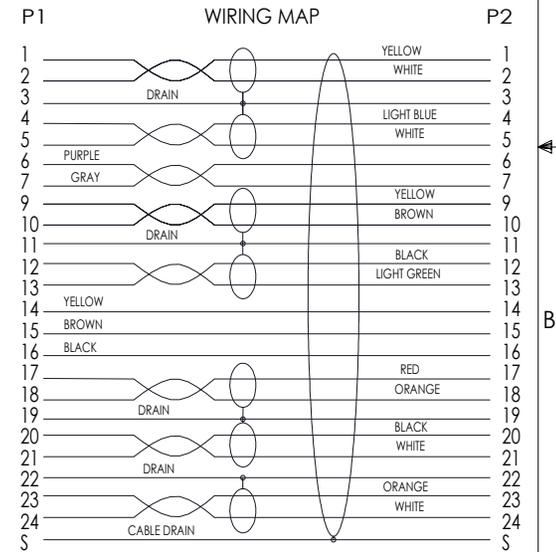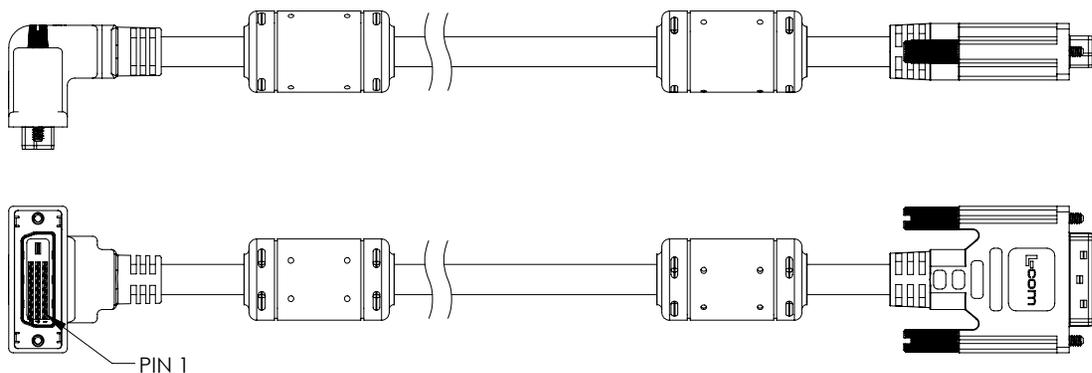

PART NUMBER	LENGTH	
	METERS	[FEET]
DVIDD-RA2-0.5M	0.5	[1.64]
DVIDD-RA2-1M	1.0	[3.28]
DVIDD-RA2-2M	2.0	[6.56]
DVIDD-RA2-3M	3.0	[9.84]
DVIDD-RA2-4M	4.0	[13.12]
DVIDD-RA2-5M	5.0	[16.41]

- NOTES:**
1. CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY
 2. CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.
 3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS DRAWN BY D. CASTRO	DATE 10/19/11		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY D. PARHAM	10/19/11		CATEGORY AUDIO/VIDEO
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [.51] .XXX = ±.005 [.13]	APPROVED BY P. MCNEIL	10/20/11	PRODUCT DESCRIPTION CBL DVI-D DL RA	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
	REF		DWG. NO. DVIDD-RA2-M	REV. E
			SCALE: NONE	CAD FILE: DVIDD-RA2-M.SLDRW
				SHEET 1 OF 1