
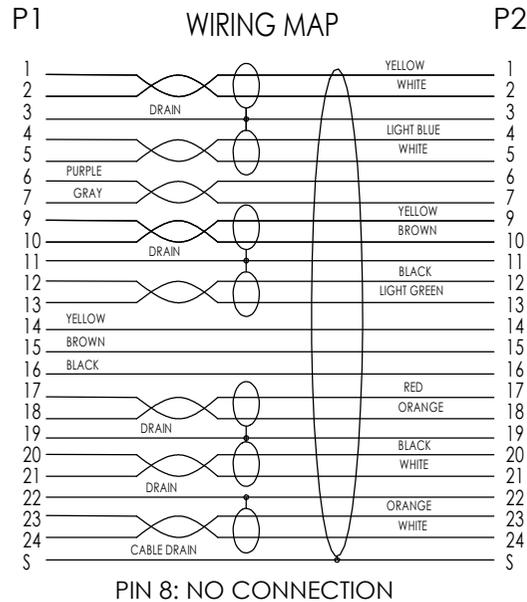


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/21/11	D.GRIFFIN
B	ECN8182: UPD DWG FROM MOLDED THUMBSCREW TO METAL THUMBSCREW	11/30/2015	B.ZHANG
C	ECN 10838: REVISE UL STYLE TO 21551, ADD LSZH CBL CHARACTERISTICS TO DWG, NEW FORMAT	12/10/2020	M.BLACKWOOD

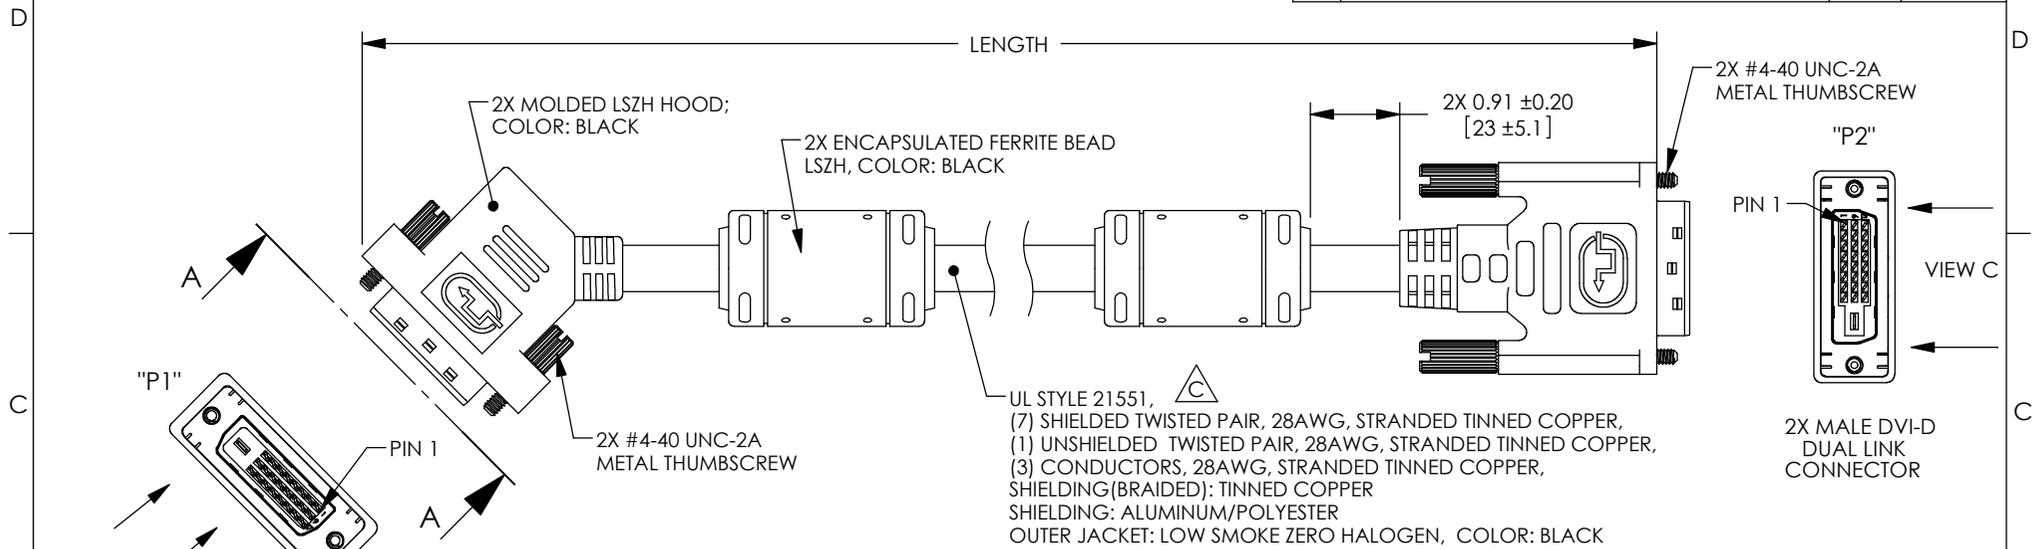

MODEL NUMBER	LENGTH	
	FEET	METERS
DVIDDLZ-45-1	1.0	.31
DVIDDLZ-45-3	3.0	.91
DVIDDLZ-45-5	5.0	1.52
DVIDDLZ-45-10	10.0	3.05
DVIDDLZ-45-15	15.0	4.57

**NOTES:**

1. CABLES TO BE TESTED FOR CONTINUITY.
2. CABLES TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).



**LSZH CABLE CHARACTERISTICS:**

FLAME RATING: IEC 60332-1  
 CORROSIVE GAS: IEC 60754  
 SMOKE EMISSION: IEC 61034

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ± 1/32 .XXX = ± .005 [13]   ANGLES ± 1°	APPROVALS	DATE	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY D.FRISIELLO	12/14/11	
	CHECKED BY R.SCOTT	12/14/11	AUDIO/VIDEO
	APPROVED BY P.McNEIL	12/14/11	PRODUCT DESCRIPTION
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CA DVI-D DL 45 DEG W/FERR LSZH
THIRD-ANGLE PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	CAGE CODE <b>43321</b>
	REF	DWG. NO. <b>DVIDDLZ-45</b>	REV. <b>C</b>
		SCALE: NONE	CAD FILE: DVIDDLZ-45.SLDDRW
			SHEET 1 OF 1