
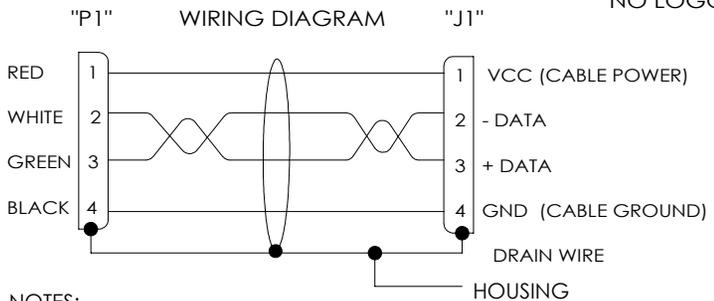
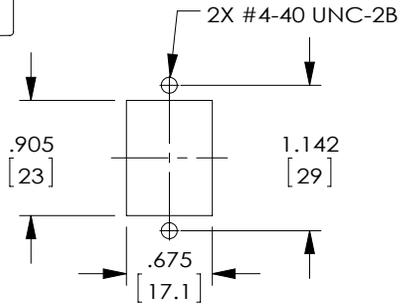
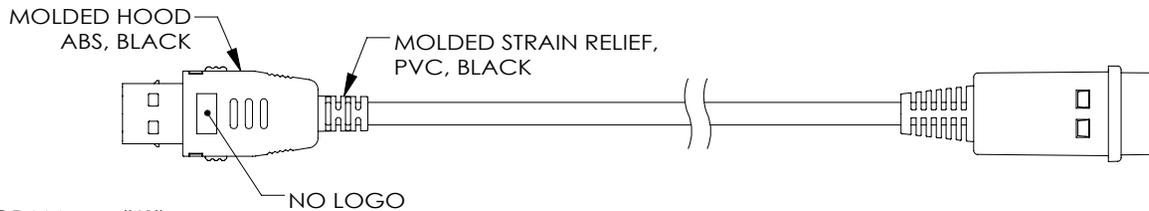
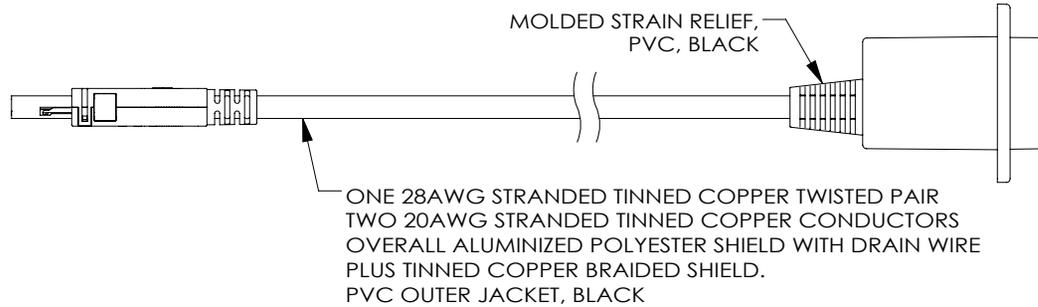

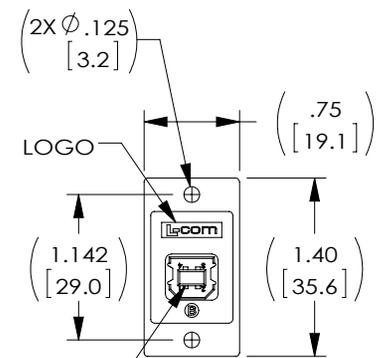


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/29/12	D.GRIFFIN
B	ECN 6716: CN RELEASE ON SNAP-ON COVER	3/6/13	D.FRISIELLO
C	ECN 8409: ADD TEMPERATURE RATING -10-70°C	7/15/16	S.J.

PART NUMBER	LENGTH	
	INCHES	MM
ECF504-12BAL	12.0	[304.8]
ECF504-24BAL	24.0	[609.6]
ECF504-36BAL	36.0	[914.4]
ECF504-72BAL	72.0	[1828.8]
ECF504-120BAL	120.0	[3048.0]

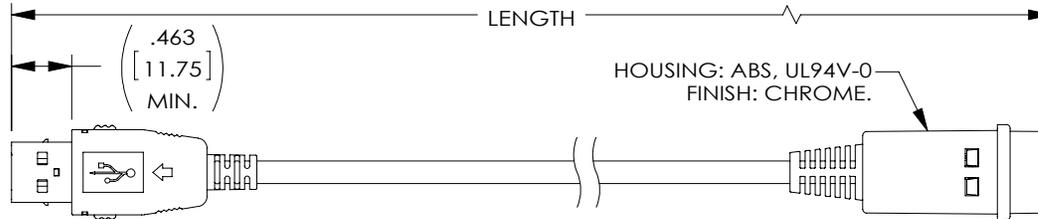

- NOTES:
1. OPERATING TEMPERATURE: -10°C TO +70°C
 2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 3. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (ROHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE
	DRAWN BY D. DESJARDIN	10/24/12
	CHECKED BY R. SCOTT	10/24/12
	APPROVED BY S. SMITH	10/24/12
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
PROJECTION	COLOR VARIATIONS MAY OCCUR	

L-com Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
USB B-F PNL MNT/A LTCH-M

SIZE A	FSCM NO. 43321	DWG. NO. ECF504-BAL	REV. C
SCALE: NONE		CAD FILE: ECF504-BAL.SLDDRW	
			SHEET 1 OF 1