






THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 8409: ADD TEMPERATURE RATING -10-70°C	7/15/16	S.LU


PART NUMBER	LENGTH	
	INCHES	MM
ECF504-12BBS	12.0	[304.8]
ECF504-24BBS	24.0	[609.6]
ECF504-36BBS	36.0	[914.4]
ECF504-72BBS	72.0	[1828.8]
ECF504-120BBS	120.0	[3048.0]

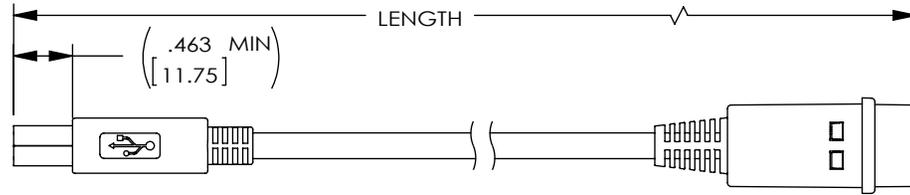

HOUSING: ABS, UL94V-0  
FINISH: CHROME

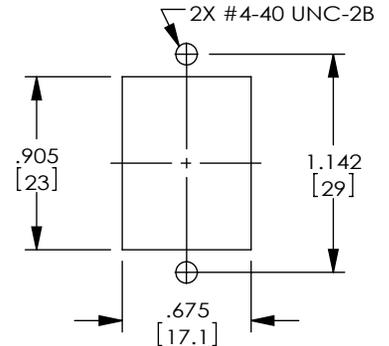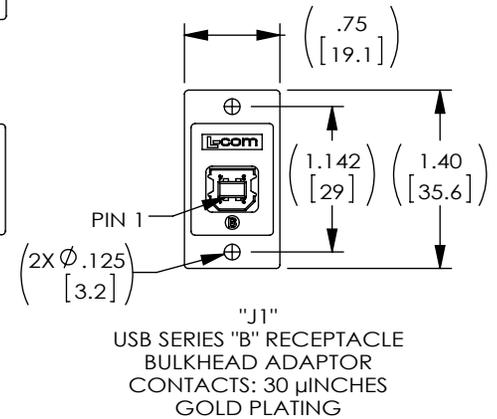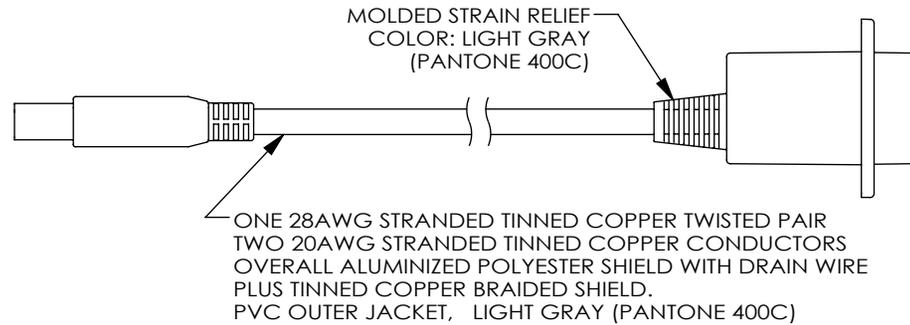

RECOMMENDED  
PANEL CUT OUT

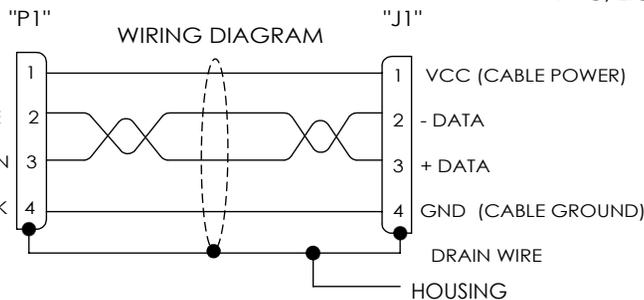

NOTES:

1. OPERATING TEMPERATURE: -10°C TO +70°C
2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
3. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	11/29/2010		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D. CASTRO	11/29/2010	PRODUCT DESCRIPTION	USB B-F PNL MNT/B-M SHLD
PROJECTION	APPROVED BY S. SMITH	11/30/2010	SIZE	FSCM NO.
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	<b>A</b>	<b>43321</b>
			DWG. NO.	REV.
			ECF504-BBS	<b>E</b>
			SCALE: NONE	CAD FILE: ECF504-BBS.SLDDRW
				SHEET 1 OF 1