
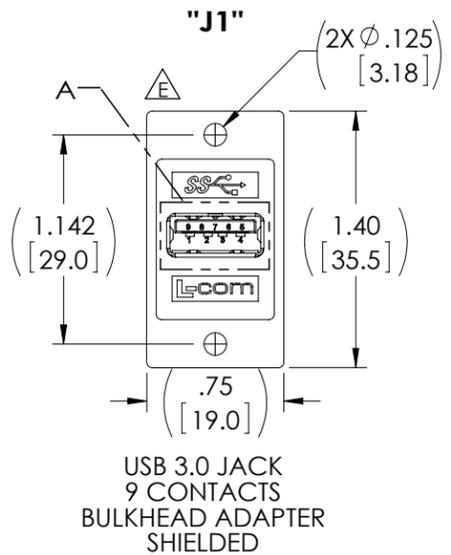
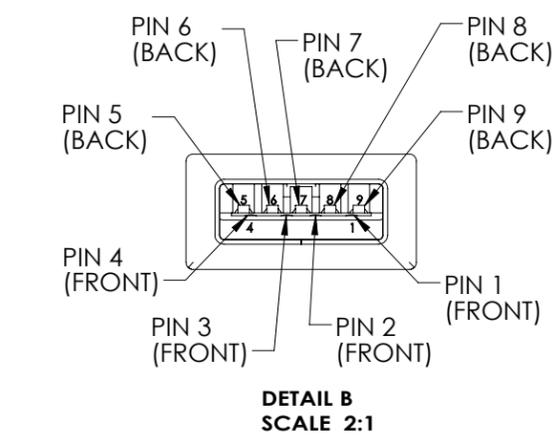
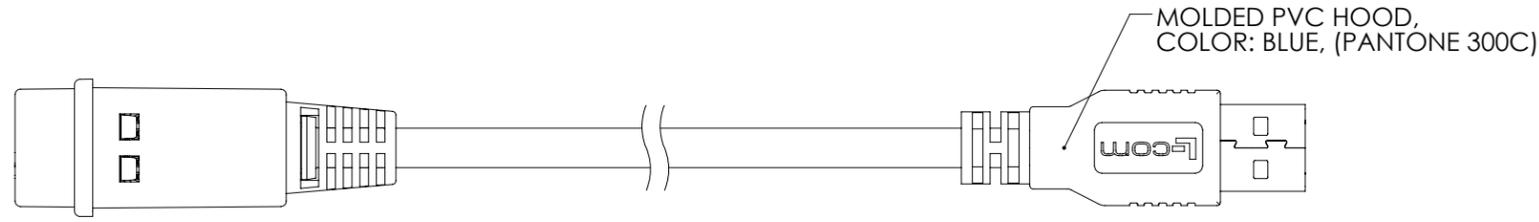
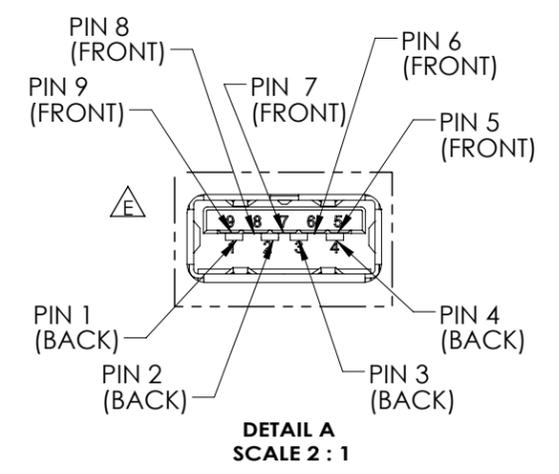
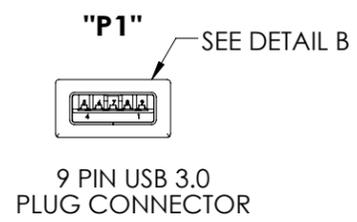
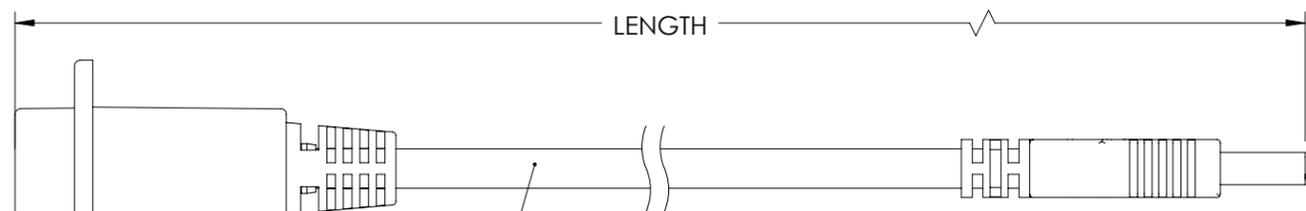


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
E	ECN 8580; ROTATE ADPT 180°. CHANGE FRONT HSG TO BE COMPLIANT WITH THE INDUSTRY	12/15/2016	B.ZHANG

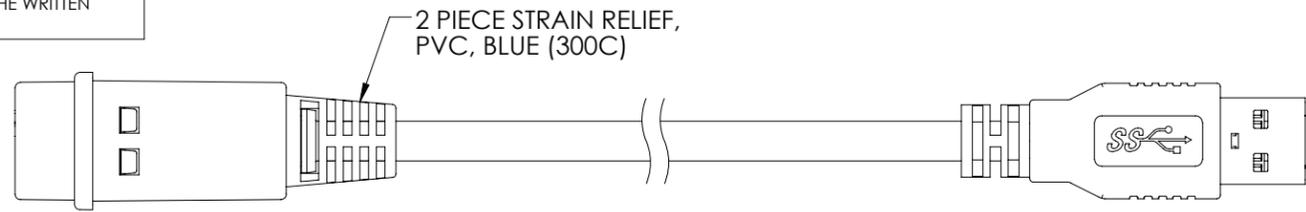

NOTES:

MATERIAL:
TYPE "A" JACK:
COUPLER HOUSING: ABS, UL94V-0.
CONNECTOR PLASTIC: (BLUE) PBT WITH GLASS FIBER
CONNECTOR CONTACTS: BRASS
CONNECTOR SHELL: SUS
PCB: EPOXY GLASS FP-4, 94V-0 FLAMMABILITY RATING


TYPE "A" PLUG:
CONNECTOR SHELL: SPCC
CONNECTOR PLASTIC: (BLUE) PBT WITH GLASS FIBER, UL94V-0
CONNECTOR CONTACTS: PHOSPHOR BRONZE

FINISH:
COUPLER HOUSING: CHROME
CONNECTOR CONTACTS: GOLD, 30μINCHES
CONNECTOR SHELL: NICKEL


ENVIRONMENTAL:
OPERATING TEMPERATURE: -10°C TO +70°C

MISCELLANEOUS:
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

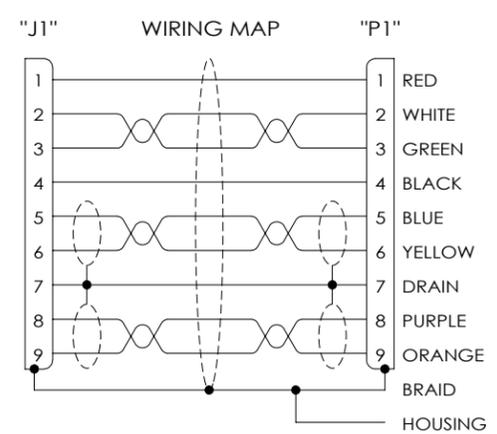

PART NUMBER	LENGTH	
	INCHES	MM
ECF504-30-03AAS	11.8	300
ECF504-30-05AAS	19.7	500
ECF504-30-075AAS	29.5	750
ECF504-30-1AAS	39.4	1000

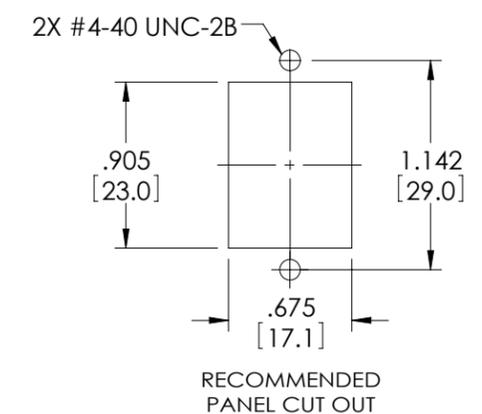

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2[51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ±.2 [5.08]
.XX = ±.02 [5.1]
.XXX = ±.005 [1.3]

APPROVALS	DATE
DRAWN BY D. PARHAM	12/09/2011
CHECKED BY ENG	12/09/2011
APPROVED BY S. SMITH	12/09/2011

L-com Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845

CATEGORY: USB

PRODUCT DESCRIPTION: USB 3.0 A-A PANEL ADPT SHIELD

SIZE	FSCM NO.	DWG. NO.	REV.
B	43321	ECF504-30-AAS	E

SCALE: NONE CAD FILE: ECF504-30-AAS.SLDDRW SHEET 1 OF 1

